
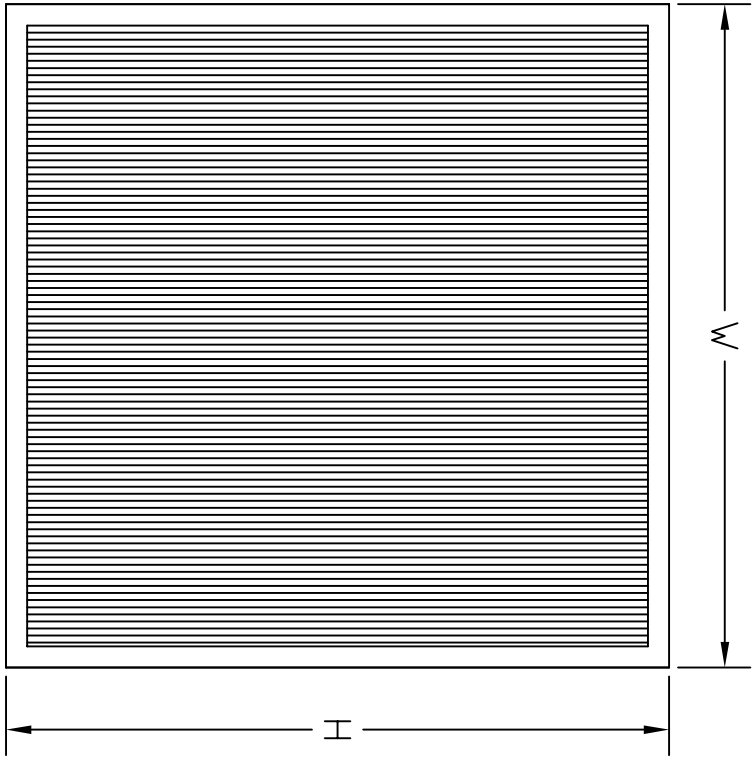


NOMINAL SIZE	ACTUAL SIZE		MEDIA sq. ft.			
	H	W	STD	HC	SHC	
8 x 8 x 6	8	8	7.87	-	-	
12 x 12 x 6	12	12	20.93	-	-	
18 x 18 x 6	18	18	51.68	-	-	
24 x 12 x 6	24	12	70.47	-	-	
24 x 18 x 6	24	18	44.84	-	-	
24 x 24 x 6	24	24	96.09	-	-	
24 x 30 x 6	24	30	123.32	-	-	
24 x 36 x 6	24	36	148.95	-	-	
24 x 48 x 6	24	48	200.20	-	-	
24 x 60 x 6	24	60	253.05	-	-	
24 x 72 x 6	24	72	304.30	-	-	
*30 x 30 x 6	30	30	156.21	-	-	
*30 x 48 x 6	30	48	253.58	-	-	
*30 x 60 x 6	30	60	320.53	-	-	
*30 x 72 x 6	30	72	385.44	-	-	
*36 x 30 x 6	36	30	189.09	-	-	
*36 x 36 x 6	36	36	228.38	-	-	
*36 x 48 x 6	36	48	306.97	-	-	
*36 x 60 x 6	36	60	388.01	-	-	
*36 x 72 x 6	36	72	466.59	-	-	
12 x 12 x 12	12	12	44.10	51.98	58.28	
24 x 12 x 12	23.375	11.375	88.08	104.51	116.45	
24 x 12 x 12	24	12	94.50	113.40	127.58	
24 x 18 x 12	24	18	141.75	170.10	191.37	
24 x 24 x 12	23.375	23.375	181.01	214.76	239.30	
24 x 24 x 12	24	24	189.00	226.80	255.15	
24 x 30 x 12	24	30	242.55	286.65	321.30	



NOTES:

1. FILTER CONSTRUCTION
 - 1.1. PLEATED GLASS MICROFIBER MEDIA
 - 1.2. ROLLED EDGE ALUMINUM SEPARATORS
 - 1.3. 18 ga. GALVANIZED METAL FRAME
 - 1.4. TWO-PART POLYURETHANE SEALANT
 - 1.5. CLOSED CELL NEOPRENE GASKET - OPTIONAL

2. TOLERANCES +/- 1/16" H&W, +/- 1/6"D
3. FILTER THICKNESS:
 - 3.1. 6" NOMINAL = 5.875" ACTUAL
 - 3.2. 12" NOMINAL = 11.50" ACTUAL
4. UL CLASSIFIED

PERFORMANCE NOTES:

1. EFFICIENCY VALUES BASED ON A 0.30 MICRON SIZE PARTICLE
2. INITIAL RESISTANCE
 - 2.1. 6" = 0.79" @ 175 FPM
 - 2.2. 12" STD = 0.79" @ 275 FPM
 - 2.3. 12" HC = 1.30" @ 500 FPM
 - 2.4. 12" SHC = 1.20" @ 500 FPM
3. MAX. TEMPERATURE OF F
 - 3.1. 180 DEGREES