


Pinion Gear Modification Reference for OS Giken GTR R35 VR38DETT Front LSD Installation

Required Tool

Small Sander
(Refer to Picture 3.)

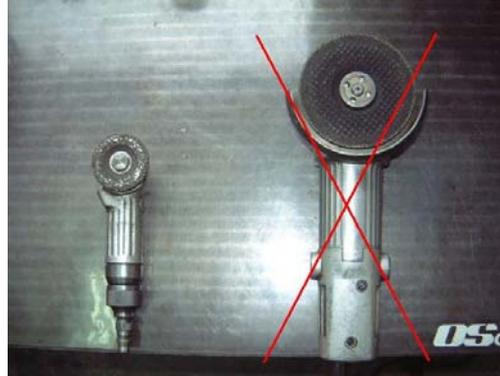

Picture 3

Modification

1. You need to shave off blue colored area shown as Picture 2 and Figure 1 until OEM pinion gear has enough clearance with installed LSD case to prevent pinion gear contact with LSD case. Please do not over shave it. Shaven amount differs depending on tolerance of the pinion gears. Picture 1 shows the pinion gear before shaving off.



Picture 1



Picture 2



Figure 1

2. Left over piece of metal, grease and other waste generated during the modification cause critical damage to bearings, gears, LSD and other parts. Please clean up the diff career carefully to remove the piece of metal, grease and other waste.

General Warning

Please be aware of potential risks and hazards when installing our products. We do not take any responsibility for any loss and/or injury occurred when our products are modified, re-used and/or ill-fitted.

Specification may be changed without notice.