


# WILDFIRE DOT

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT

## SETUP SHEET

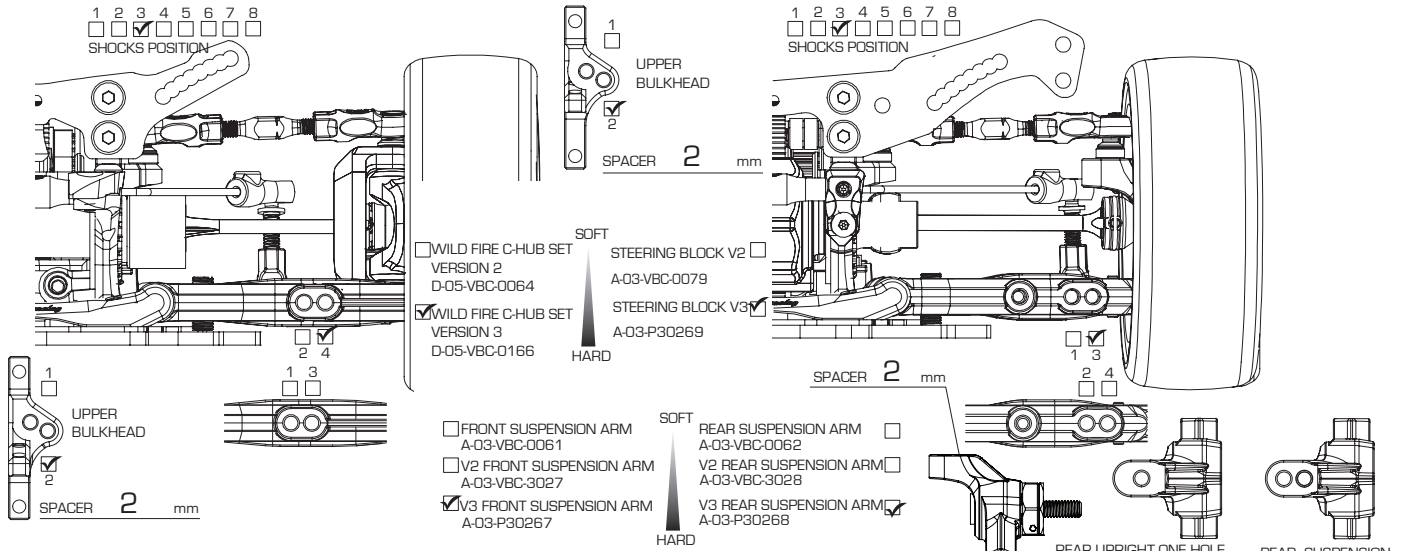


**FRONT**

|                       |  |                        |                     |
|-----------------------|--|------------------------|---------------------|
| GROUND CLEARANCE      | 4.8 mm   | DROOP                  | 9.5 (To Pin Center) |
| CAMBER ANGLE          | 1.5 °  | TOE ANGLE              | +1 °                |
| CASTER BLOCK          | 4  | FRONT DRIVE DIFF (OIL) | ( ) DIRECT          |
| STABILIZER            | 1.2 (1.3) 1.4                                    | WHEEL SPACER           | 0 mm                |
| SUSPENSION SHIM (FF)  | 1 mm   | SUSPENSION SHIM (FR)   | 1 mm                |
| SUSPENSION MOUNT (FF) | F00  | SUSPENSION MOUNT (FR)  | C0                  |
| AXLE TYPE / SIZE      | TWO-PIECE JOINT ( ) SINGLE JOINT (STEEL/ALUM) mm |                        |                     |

**REAR**

|                       |  |                       |                     |
|-----------------------|--|-----------------------|---------------------|
| GROUND CLEARANCE      | 5.2 mm   | DROOP                 | 9.0 (To Pin Center) |
| CAMBER ANGLE          | 2 °  | TOE ANGLE             | 3 °                 |
| REAR DRIVE DIFF (OIL) | 1000   | DRIVE CUP             | (ALUMINUM) STEEL    |
| STABILIZER            | 1.2 (1.3) 1.4  | WHEEL SPACER          | mm                  |
| SUSPENSION SHIM (RF)  | 1 mm   | SUSPENSION SHIM (RR)  | 1 mm                |
| SUSPENSION MOUNT (RF) | C0   | SUSPENSION MOUNT (RR) | E30                 |
| AXLE TYPE / SIZE      | TWO-PIECE JOINT ( ) SINGLE JOINT (STEEL/ALUMINUM) mm |                       |                     |

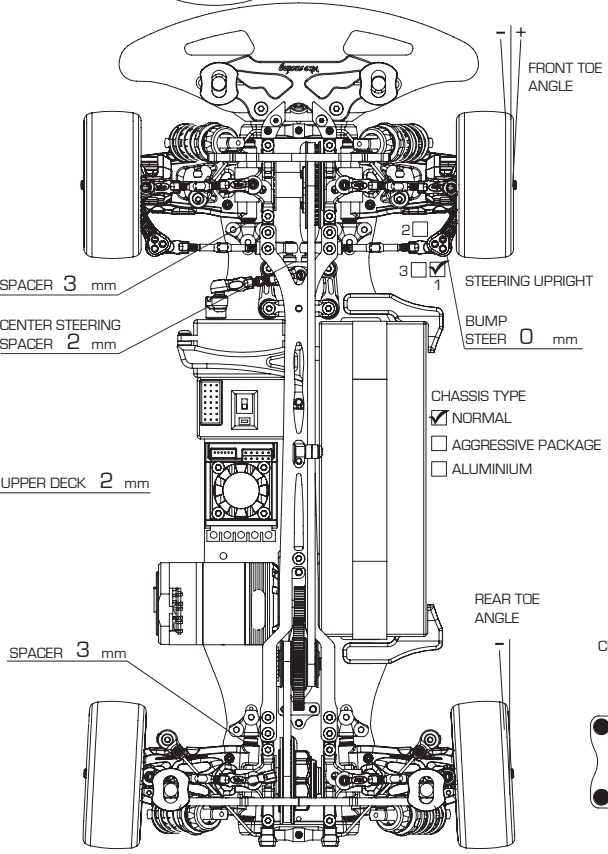

**FRONT**

|                |                               |
|----------------|-------------------------------|
| SHOCK LENGTH   | 59 mm                         |
| PISTON         | (3) 4 hole(s) / OTHERS        |
| OIL            | 350                           |
| SPRING         | Orange                        |
| OIL SEALER CAP | S / MS (M) / H                |
| REBOUND        | 20 %                          |
| NOTES          |                               |
| MOTOR          | SPUR PITCH/ T PINION PITCH/ T |
| TIRE           | TIRE INSERT WHEEL             |
| TIRE ADDICTIVE | BODY REAR WING                |
| ESC            | BATTERY                       |
| REMARKS        |                               |

**REAR**

|                |                        |
|----------------|------------------------|
| SHOCK LENGTH   | 59 mm                  |
| PISTON         | (3) 4 hole(s) / OTHERS |
| OIL            | 350                    |
| SPRING         | Red                    |
| OIL SEALER CAP | S / MS (M) / H         |
| REBOUND        | 20 %                   |
| NOTES          |                        |

