


ATHENA 1090 EVO

REACH NEW HEIGHTS IN FULL SAFETY WITH PROACTIVE AND DYNAMIC LEVELLING





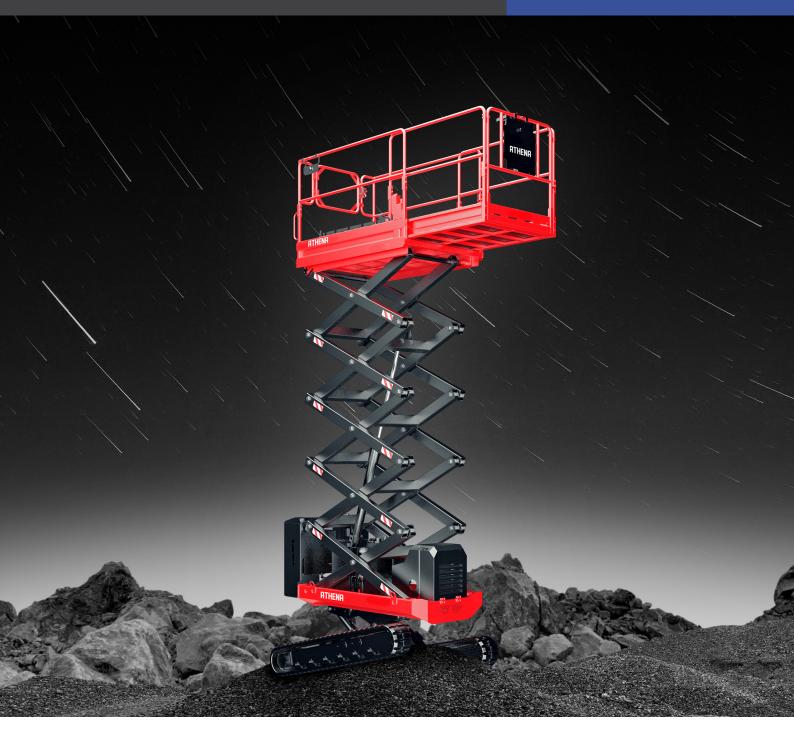





The ATHENA 1090 EVO bi-levelling scissor lift is able to operate on an incline of up to 20° and now can take you to a whopping 10 metre working height.

The automatic levelling system overcomes all the standard limitations of traditional 4×4 traction, providing the opportunity to work in hard to reach and confined spaces. The dynamic levelling of the machine enables the operator to work easily and in full safety even on steep slopes or uneven and rough terrain. The bi-energetic engine provides full versatility for both indoor or outdoor applications.

WHAT MAKES THE ATHENA 1090 EVO?



A FASTER, MORE POWERFUL ENGINE

The Kubota name is synonymous with the world's highest performing, efficient and reliable engines, providing awesome power when you need it most while reducing emissions and impact on the environment. The new whisper quiet Kubota Z602 diesel engine means happier operators - and neighbours.




REACH NEW HEIGHTS WITH A TALLER DESIGN

With a generous 10 metres of working height the ATHENA 1090 is the tallest in her class, enabling extreme access with its extra reach and compact design so you can get up close and now go higher than ever before.





ATHENA 1090 EVO – New Features

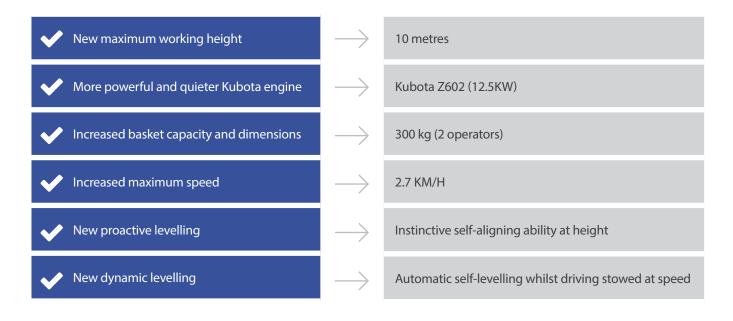



PROACTIVE AND DYNAMIC LEVELLING

This is the next evolution of the unique bi-levelling ability of the ATHENA range of scissor lifts. The first of its kind in the world to feature proactive and dynamic levelling, this means that the ATHENA now has the ability to instinctively and automatically level in either the stowed or raised position during translation.




LARGER WORKING PLATFORM

The considerable increase in platform size means that the ATHENA 1090 EVO now has a spacious 2-man basket, giving you the elbow room to get the job done faster and more comfortably. The basket can also be extended to give you generous horizontal reach and extra room for tools and materials.



ATHENA 1090 EVO

DIMENSIONS

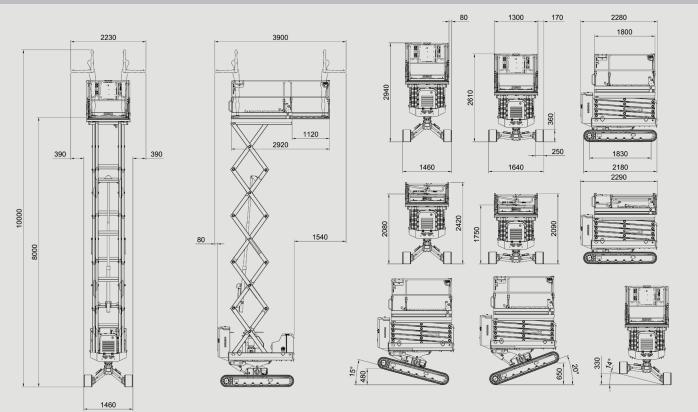

. DATA REPORTED IN THIS CATALOGUE ARE NOT BINDING. ALMAC SRL RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

ATHENA 1090 EVO

SPECIFICATIONS

Basket capacity	300 kg (2 op.)	Dynamic levelling system	Yes
Max working height	10 m	Pro Active levelling system	Yes
Max height basket floor	8 m	Direction control system	Yes
Moving height	7 m	Easy-drive system	Yes
Powered	Kubota Z602 (12.5kW)	Kit for high speed	max 2.7 km/h
Accelerator	Auto	Ground emergency	Yes
Undercarriage	Bi-levelling	Control of inclination	Auto
Basket levelling	Auto	Gradeability	25°
Longitudinal levelling front	+/- 15°	Side slope	21°
Longitudinal levelling rear	+/- 20°	Length	2.26 m
Lateral levelling	+/- 14°	Width	1.46 ÷ 1.64 m
Power generator (option)	220V-1kW	Min. machine height with folded railings	2.05 (1.89) m
Electric pump (option)	220V-2kW	Total weight	2,900 kg
Hydraulic commands	Proportionals	Compliance	EN 280, ANSI, CSA, ASNZS1418

Auckland Head Office 6-10 Parkway Drive, Mairangi Bay, Auckland Phone: (+64) 09 443 2436 Email: sales@yrco.co.nz Auckland, Mt Wellington 20L Sylvia Park Road, Mt Wellington, Auckland Phone: (+64) 09 553 5470 Email: salesmtwell@yrco.co.nz Wellington 8 Broken Hill Road, Porirua, Wellington Phone: (+64) 04 212 2456 Email: saleswell@yrco.co.nz Christchurch 20 Nga Mahi Road, Sockburn, Christchurch Phone: (+64) 03 341 6923 Email: saleschch@yrco.co.nz

