




# E-Tech





## SELF-PROPELLED SCISSOR LIFTS (ELECTRIC DRIVE)

### STANDARD FEATURES

- + Proportional controls
- + Automatic pothole protection
- + Self-closing gate on platform
- + Drivable at full height
- + Non-marking tyres
- + 2WD
- + Automatic brake system
- + Emergency lowering system
- + Emergency stop button
- + Cylinder holding valve
- + Onboard diagnostic system
- + Tilt sensor with alarm
- + All motion alarm
- + Horn
- + Hour meter
- + Safety brackets
- + Forklift pockets
- + Folding handrails
- + Extended platform
- + Charger protection
- + Flashing beacon
- + Overload sensor with alarm
- + AC power to platform

### OPTIONAL EXTRAS

- + Platform work lights
- + Airline to platform

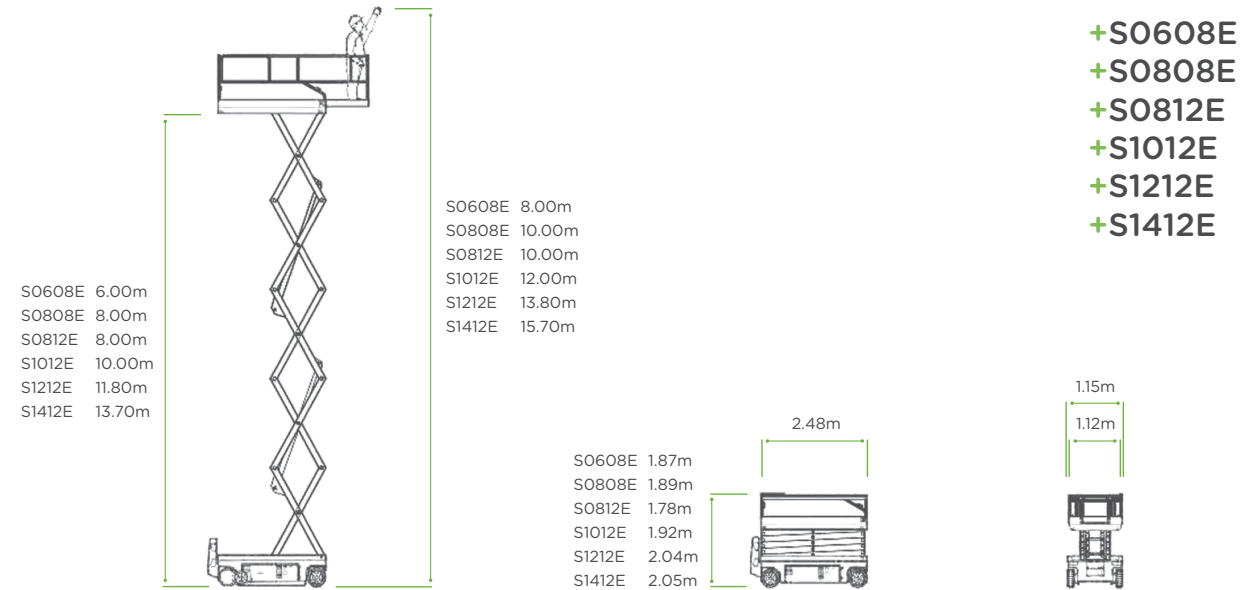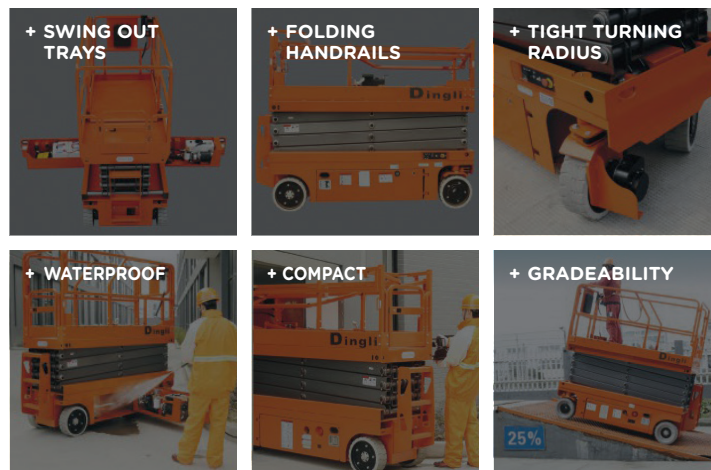

	S0608E	S0808E	S0812E	S1012E	S1212E	S1412E
S.W.L	380kg	230kg	450kg	320kg	320kg	250kg
S.W.L ON EXTENSION	113kg	113kg	113kg	113kg	113kg	113kg
MAX. OCCUPANTS - INDOOR	2	2	2	2	2	2
MAX. OCCUPANTS - OUTDOOR	1	0	2	1	0	0
WORKING HEIGHT	8.00m	10.00m	10.00m	12.00m	13.80m	15.70m
PLATFORM FLOOR HEIGHT	6.00m	8.00m	8.00m	10.00m	11.80m	13.70m
OVERALL LENGTH	2.48m	2.48m	2.48m	2.48m	2.48m	2.84m
OVERALL WIDTH	0.81m	0.81m	1.15m	1.15m	1.15m	1.25m
OVERALL HEIGHT - RAILS UP	2.20m	2.32m	2.32m	2.44m	2.58m	2.59m
OVERALL HEIGHT - RAILS DOWN	1.87m	1.89m	1.78m	1.92m	2.04m	2.05m
PLATFORM SIZE	2.27x0.81m	2.27x0.81m	2.27x1.12m	2.27x1.12m	2.27x1.12m	2.64x1.12m
PLATFORM EXTENSION SIZE	0.90m	0.90m	0.90m	0.90m	0.90m	0.90m
GROUND CLEARANCE - STOWED	0.10m	0.10m	0.10m	0.10m	0.10m	0.10m
GROUND CLEARANCE - RAISED	0.019m	0.019m	0.019m	0.019m	0.019m	0.019m
WHEELBASE	1.87m	1.87m	1.87m	1.87m	1.87m	2.22m
TURNING RADIUS - INSIDE	0m	0m	0m	0m	0m	0m
TURNING RADIUS - OUTSIDE	2.10m	2.10m	2.20m	2.20m	2.20m	2.65m
GRADEABILITY	25%	25%	25%	25%	25%	25%
MAXIMUM SLOPE	2°/3°	1.5°/3°	2°/3°	2°/3°	1.5°/3°	1.5°/3°
STOWED SPEED	4.0km/h	4.0km/h	4.0km/h	4.0km/h	4.0km/h	4.0km/h
RAISED SPEED	0.8km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h
UP/DOWN SPEED	31/67sec	42/30sec	36/33sec	54/42sec	84/38sec	73/60sec
WIND RATED SPEED	12.5m/s	n/a	12.5m/s	12.5m/s	n/a	n/a
DRIVE MOTOR	24V/1.5kW	24V/1.5kW	24V/1.5kW	24V/1.5kW	24V/1.5kW	24V/1.5kW
LIFTING MOTOR	24V/3.3kW	24V/3.3kW	24V/3.3kW	24V/4.5kW	24V/4.5kW	24V/4.5kW
BATTERIES	4x6V/225Ah	4x6V/225Ah	4x6V/225Ah	4x6V/240Ah	4x12V/300Ah	4x12V/300Ah
INTEGRATED CHARGER	24V/25A	24V/25A	24V/25A	24V/25A	24V/25A	24V/25A
TYRES	Ø381x127mm	Ø381x127mm	Ø381x127mm	Ø381x127mm	Ø381x127mm	Ø381x127mm
WEIGHT	2125kg	2180kg	2655kg	2965kg	2880kg	3330kg