



GRADEABILITY

STANDARD EQUIPMENT:

Folded Handrails: Convenient for storage, transportation and traction through standard doors and elevators


Extended Platform

Turning Radius: 0

Automatic Pothole

Protection: Superior traction and safety in an elevated position

Intelligent Control on ECU

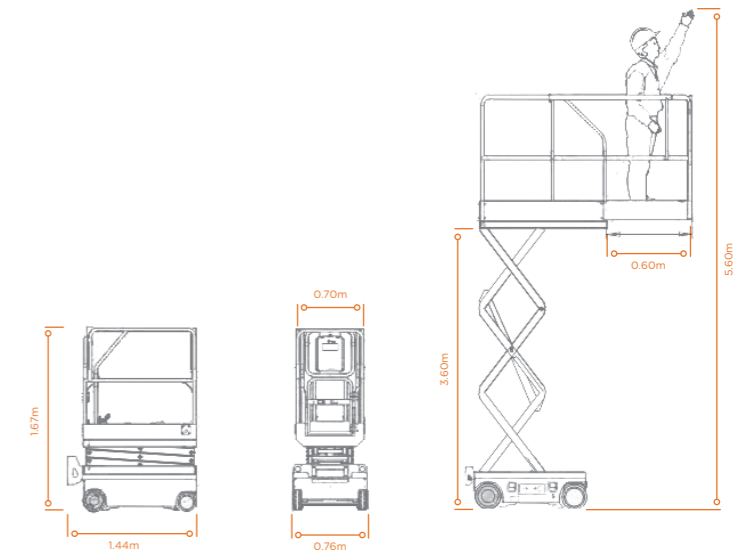

S036-RS

	S.W.L	240kg
	S.W.L ON EXTENSION	100kg
	MAX. OCCUPANTS (INDOOR/OUTDOOR)	2/1
	WORKING HEIGHT	5.60m
	PLATFORM FLOOR HEIGHT	3.60m
	OVERALL LENGTH (WITH LADDER)	1.44m
	OVERALL LENGTH (WITHOUT LADDER)	1.29m
	OVERALL WIDTH	0.76m
	OVERALL HEIGHT (RAILS UP)	2.03m
	OVERALL HEIGHT (RAILS DOWN)	1.67m
	PLATFORM SIZE (LENGTH/WIDTH)	1.29x0.70m
	PLATFORM EXTENSION SIZE	0.60m
	GROUND CLEARANCE (STOWED)	0.06m
	GROUND CLEARANCE (RAISED)	0.015m
	WHEELBASE	1.05m
	TURNING RADIUS (INSIDE)	0.40m
	TURNING RADIUS (OUTSIDE)	1.55m
	DRIVE MOTORS	2x24VDC/0.4kW
	LIFTING MOTOR	24VDC/0.8kW
	TRAVEL SPEED	
	Stowed	4.2km/h
	Raised	1.1km/h
	Up/Down speed	34/28sec
	BATTERIES	2x12V/85Ah
	INTEGRATED CHARGER	24V/10A
	GRADEABILITY	25%
	MAXIMUM WORKING SLOPE	1.5°/3°
	TYRES	Ø230x80mm
	WEIGHT	880kg

Rizer

SELF-PROPELLED SCISSOR LIFTS



TIGHT TURNING
RADIUS RAM
STEERING



POTHOLE DEVICE



TOUCH DISPLAY
SCREEN



GRADEABILITY