
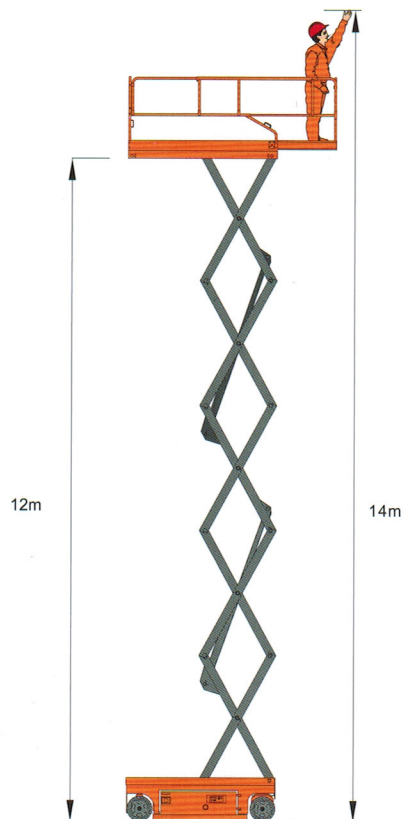


ELECTRIC SCISSOR LIFTS

E-Tech

S1212E

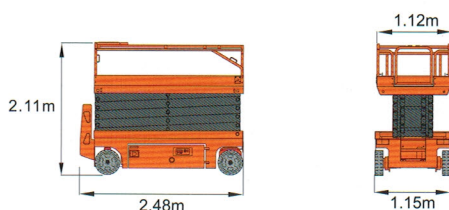

	S.W.L	230kg/507lb
	S.W.L on extension	113kg/249lb
	Max Occupants	2

	Working height	14m/45ft11in
	Platform floor height	12m/39ft4in

	Overall length	2.48m/8ft1in
	Overall width	1.15m/3ft9in
	Overall height(Rails up)	2.59m/8ft6in
	Overall height(Rails down)	2.11m/6ft11in
	Platform size	2.27X1.12m/7ft5inX3ft8in
	Platform extension size	0.9m/2ft11in
	Ground clearance(Stowed)	0.1m/4in
	Ground clearance(Raised)	0.019m/0.7in
	Wheelbase	1.87m/6ft2in
	Turning radius(Inside)	0m
	Turning radius(Outside)	2.20m/7ft2in

	Drive motors	24V/ 1.5kw
	Lifting motor	24V/ 3kw

	Travel speed(Stowed)	5km/h 3miles/h
	Travel speed(Raised)	0.8km/h 0.5miles/h
	Up/Down speed	84/ 38sec

	Batteries	4X6 V/210 Ah
	Integrated charger	24V/ 25 A

	Gradeability	25%
	Maximum working slope	2 - 3 °

	Tyres	Φ381X127mm
--	--------------	------------

	Weight	2740kg/6040lb
--	---------------	---------------

Standard Equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 2WD
- Automatic brakes system
- Emergency lowering system
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- Motion Alarms

- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding handrails
- Extended platform
- Charger protection
- Flashing beacon
- AC power to the platform

Options

- Platform work lights
- Airline to the platform

