


TRIO COAT RACK INSTALLATION

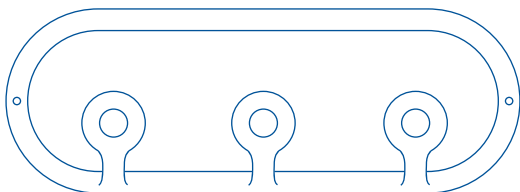

- STEP 1:** Measure the distance between the mounting holes on the rack.
- STEP 2:** Pre-drill holes into drywall and hammer anchors into each hole.
- STEP 3:** Hold up the rack, and align the mounting holes with the drywall anchors.
- STEP 4:** Secure to the wall by driving provided screws into each anchor, alternating between screws until each screw is fully tightened to the wall.
- CAUTION:** Do not screw one screw in fully and then the other, as the tension may result in cracking.
- STEP 5:** Once installed, your trio is ready to hold your winter coat or summer sun hat—even your pup’s favorite leash.

MAX WEIGHT 15 LBS