




WHAT'S INCLUDED:

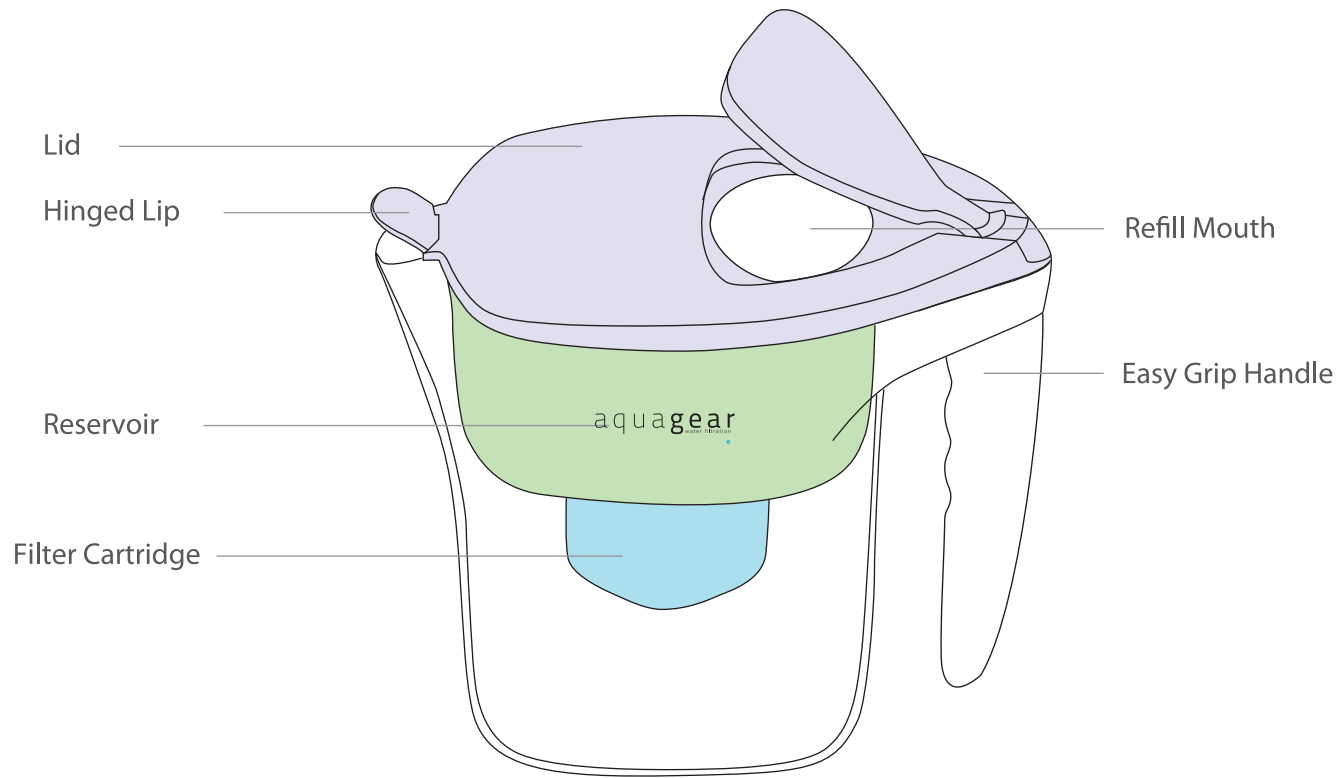

Flushing Assembly

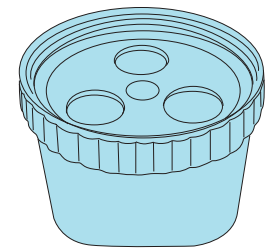

Filter Cartridge


GETTING STARTED

1 Flush




Attach or hold Flushing Assembly to faucet and run cold water for 2 minutes at low pressure.
If water seeps up onto red ring when flushing, simply lower the water pressure.

2 Tighten

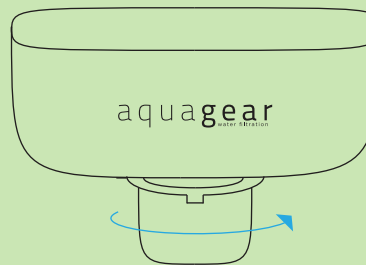

Unscrew red Flushing Assembly and store in a safe place, then screw Filter Cartridge onto Reservoir.
Flushing Assembly can be used in the future to re-flush the filter if water flow slows down.

3 Fill

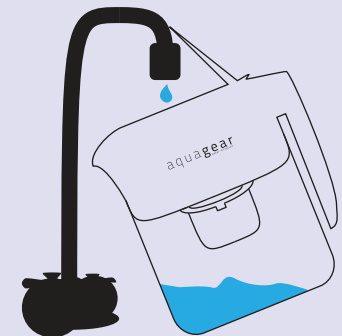

Fill pitcher from faucet and enjoy clean, great-tasting water!