NEW CYCLES INSTALLATION INSTRUCTIONS

DUCATI 999/749

FENDER ELIMINATOR

- Under the stock exhaust, unplug barrel connectors for signals and plate light
- 2 Unbolt stock tail section
- Run wiring harness alongside of fairing and up underneath bike (picture 1)
- Take fender eliminator, and use bolt for exhaust to mount (picture 2)
- Take NRC license plate bracket and supplied hardware to mount underneath exhaust (picture 3)
- Run plate light wire through aluminum tubing alongside bike and bring in where other harness is
- (7) Use attached wiring diagram to splice everything in








NEW CLES INSTALLATION INSTRUCTIONS

FENDER ELIMINATOR

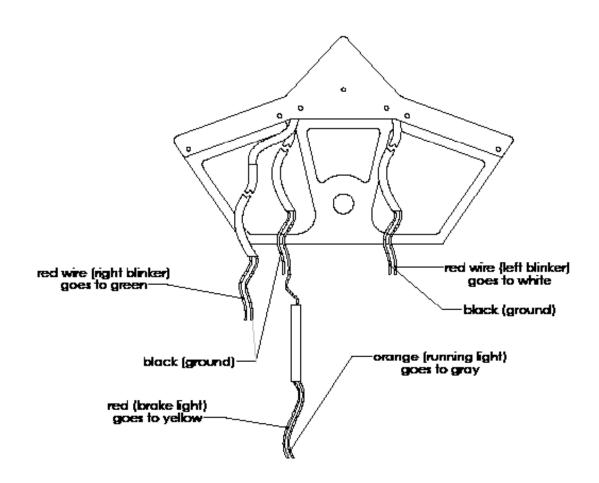

For the license plate light, black (ground) red to (gray)