

# AutoSeal® FD 2200-10 Pressure Sealer STAND-ALONE PRESSURE SEALING SYSTEM



The **AutoSeal 2200-10** stand-alone pressure sealer is the ideal solution for high-volume mailers who want to utilize existing floor model folding systems. The ability to purchase a "sealer-only" system versus a complete folding and sealing solution drastically reduces the up-front capital needed to add pressure seal as a new solution for your customers.

The 2200-10 utilizes a patented pressure seal system that has been carefully engineered and refined to process pressure seal forms at speeds of up to 40,000 pieces per hour in the most demanding environments.



#### **Standard Features**

Stand-Alone Sealing System: Specifically designed for use with various high-production floor model folders

Heavy Duty Construction: Designed for high-volume production environments such as direct mail and fulfillment centers

**Pressure Rollers:** High-production precision ground clutching four-roller system

Fault Detection: Infrared sensor located at the infeed of the sealer detects any faults and sends signal to stop the upstream folder it's connected to

Clutching Roller System: Clutching roller system reduces belt and motor wear when double-feeds are detected

Safety Cover Interlock: Shuts down the system when the cover is open

**Static Eliminator:** Static brush is located on the exit of the sealer to reduce static electricity and assist in the neat, sequential stacking of forms onto a conveyor

Interface Connections: Three interface connections for power input, signal input and fault detection output


**Plexi-Cover:** Allows operators to watch forms pass through the sealer. The cover is hinged with a handle to allow quick access to the sealing area.


**8-Ball Transport Deck:** 10" ball-deck provides smooth, enclosed transport of the form from the folder rollers into the sealer

Heavy-Duty Casters: Adjustable height - 2 fixed locking casters, 2 swivel casters


Mounting Bracket: Securely attaches the FD 2200-10 sealer to the folder

### Side view Rear view

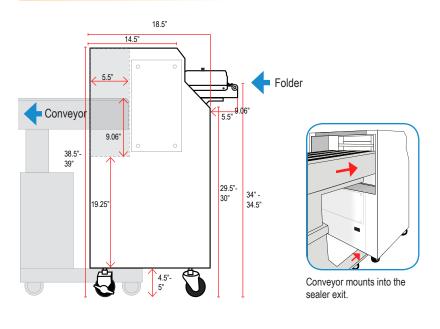




## **Top view**



## **Power supply**



## **Specifications**

Speed:	Fixed speed of 40,000 forms/hour
Paper Size:	Up to 11.5" wide
Dimensions:	25" W x 24" L x 38.5" - 39" H
Weight:	180 lbs. (82kg)
Motor:	1/2 HP AC
Power:	240V, Single Phase
Power Input Connection:	240 Volts
Signal Input Connection:	240 Volts to start relay
Fault Detection Connection:	24 Volt

WWW.WHITAKERBROTHERS.COM 3 TAFT COURT ROCKVILLE. MD 20850 800-243-9226