


PROPER  
**iPad Wall Mount**

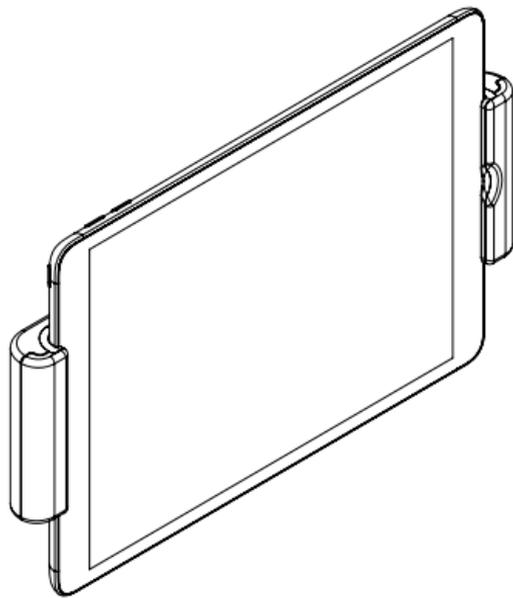

**Installation Guide**

## Before You Begin

### Power

This product includes a (2m) 8-Pin Lightning to USB cable. Before installation, ensure your device is within reach of a power source. If you are plugging your iPad directly into a wall outlet, it is recommended that you use the official Apple Power Adapter included with your iPad, or a genuine replacement from Apple.

### Cable Management

Before installation, consider the route your cable will need to take to reach a power source. Try to keep the cable away from any potential hazards or spills. You have the choice of either

- i. running the power cable out of the bottom of the mount, which will not require the cable to pass through the wall, or,
- ii. tunneling the power cable through the wall, which requires a  $\varnothing$  15-25mm hole in the wall for the cable to pass through.

### Drilling

If you choose to tunnel the cable through your surface, you will need to make a  $\varnothing$  15-25mm hole for the charging cable to pass through. Consider if your surface is suitable for this, and if possible, use a licensed professional.

### Loosening and Tightening Screws

Overtightening the screws may cause damage to the wall mount, or your device. If you feel as though something isn't fitting together correctly for any reason; first re-read the instructions to ensure you haven't missed anything, then contact our customer support team for further assistance.

### Additional Components

As the Wall Mount can be mounted onto a variety of surfaces, we are unable to provide certain hardware to assist in mounting to every wall. You will need to source the appropriate tools for your particular use case.


### Safety Notice

Please read carefully the important safety notice on page 7 before you begin drilling into your wall.

### More Information


If you require any assistance, visit our helpdesk:  
> [help.studioproper.com](https://help.studioproper.com)  
or contact our customer support team with any questions:  
> [us@studioproper.com](mailto:us@studioproper.com)

## Product Overview


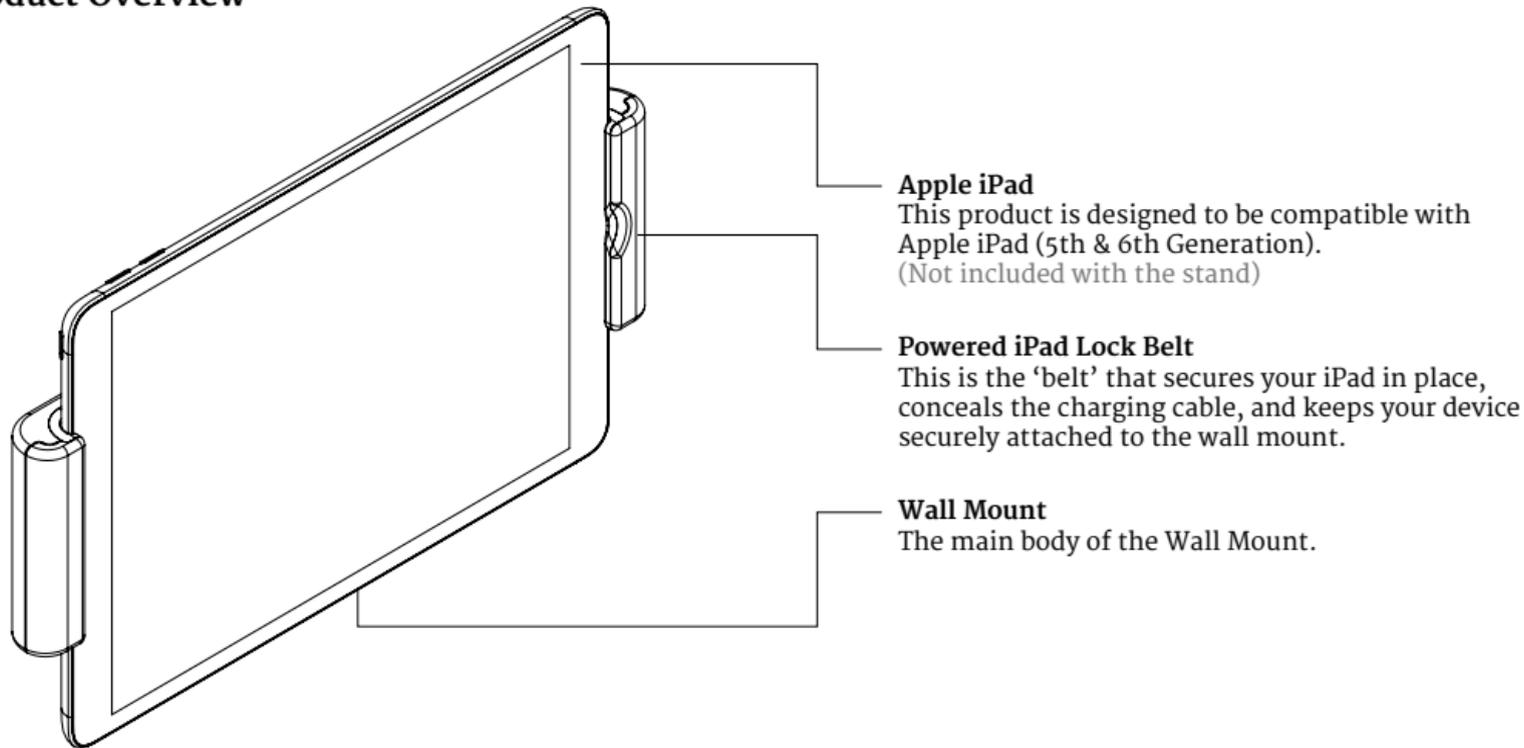


## The Toolkit


### Hex Key / Pick Tool

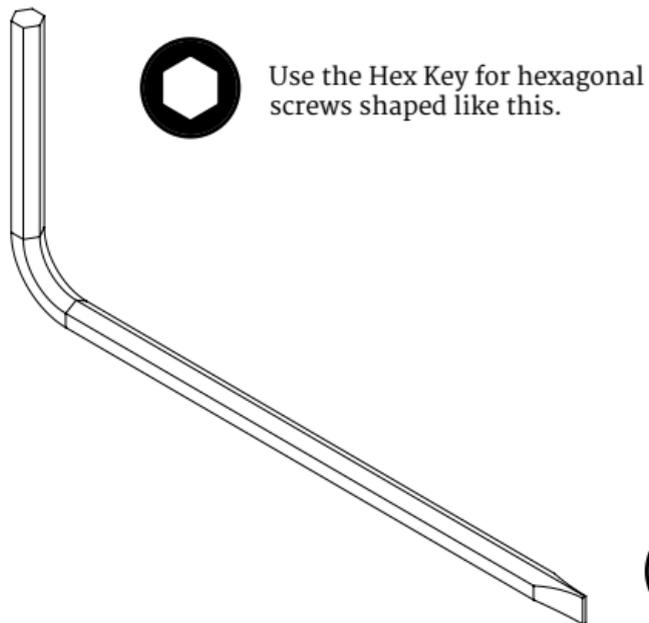


### Security Tool

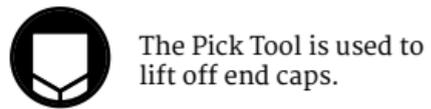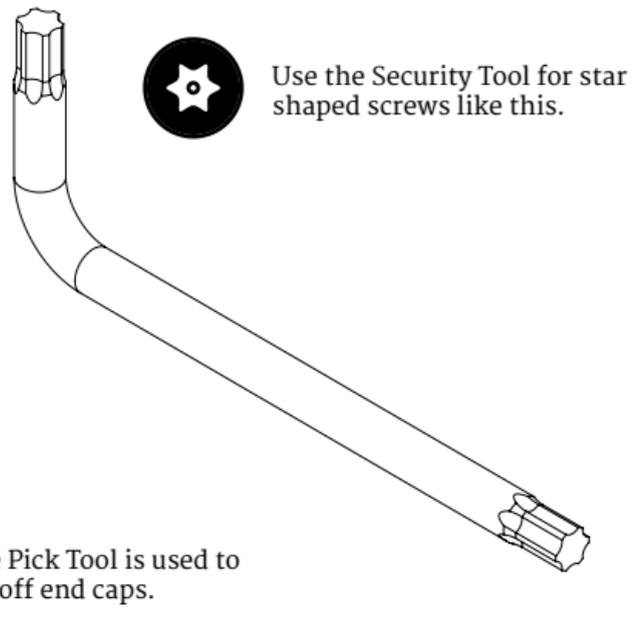

## Mounting Options

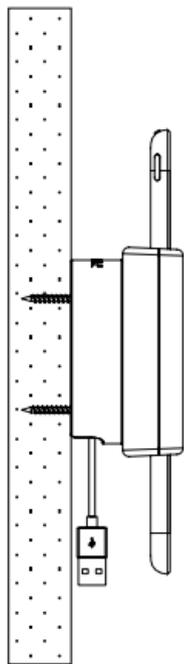


- i. **Tail**  
Tailing your cable from the bottom of the stand requires you to feed the cable through the stand before you secure it to the wall.

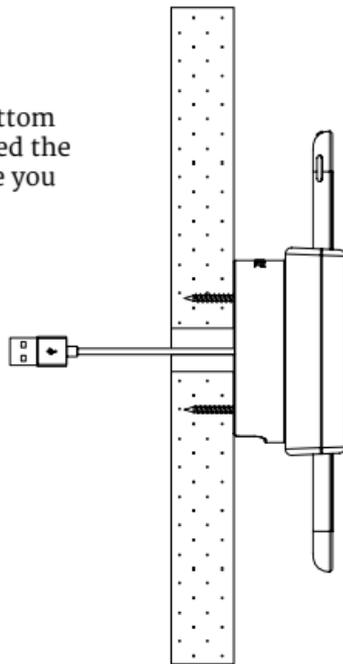

- ii. **Tunnel**  
Tunneling your cable through the wall requires you to make a hole ( $\varnothing$  15-25mm) beneath the stand.


## Additional Components

These components are not included, but are required for installation. As the Wall Mount can be mounted onto a variety of surfaces, we are unable to provide certain hardware to assist in mounting to every wall. You will need to source the appropriate tools for your particular use case.

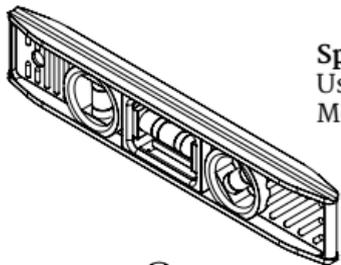

### Spirit Level

Used to perfectly align the Wall Mount to the wall before drilling.

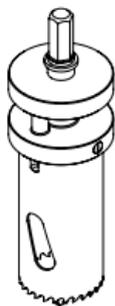


### Hole Saw (Ø 15-25mm)

Required only if you have chosen to tunnel your charging cable through the wall.



### Cordless Drill

Installation requires drilling into your wall.




### Screws

Consider the best option for your wall. 'Self-Tapping Screws' are suitable for most common surfaces.

## Safety Notice




As this product requires drilling into the wall, ensure you take into consideration the possibility of live power, gas lines, water lines, or other plumbing and utility hazards. Interference with the mains electricity can result in death. If you are in any way uncertain about the safety of the surface you are mounting to, we recommend consulting a licensed professional installation contractor.

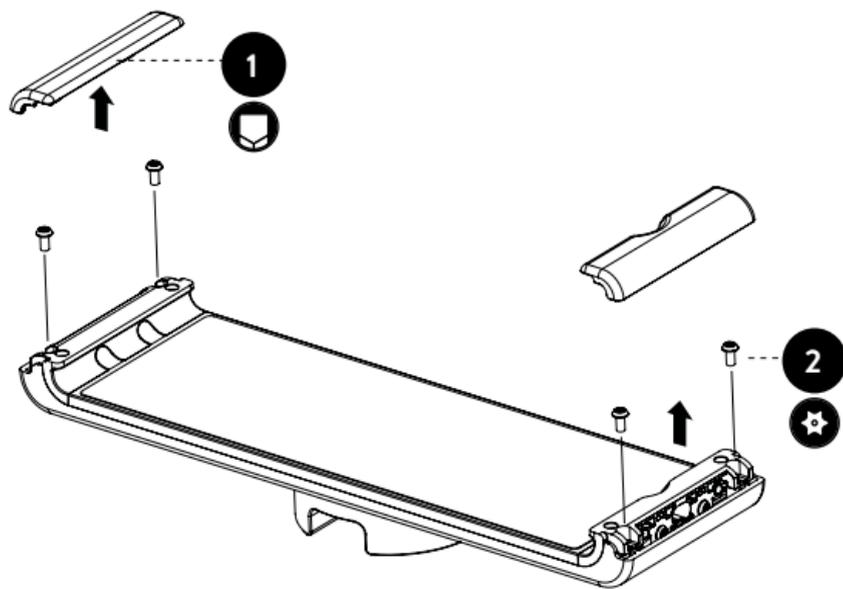


1. Use the Pick Tool to lift off the metal end caps from the Lock Belt.


2. Use the Security Tool to remove the 4 screws holding the cassette in place.

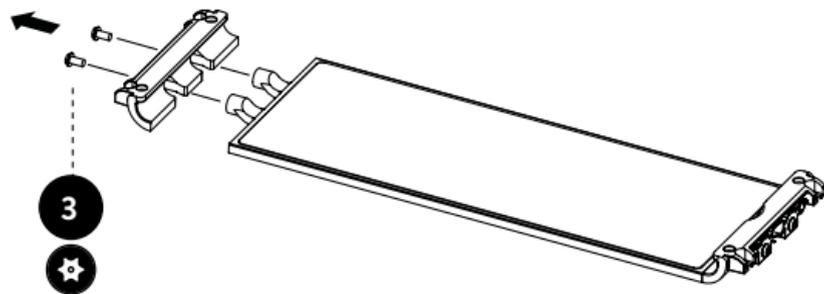


3. Use the Security Tool to remove the 2 screws holding the end cap on.

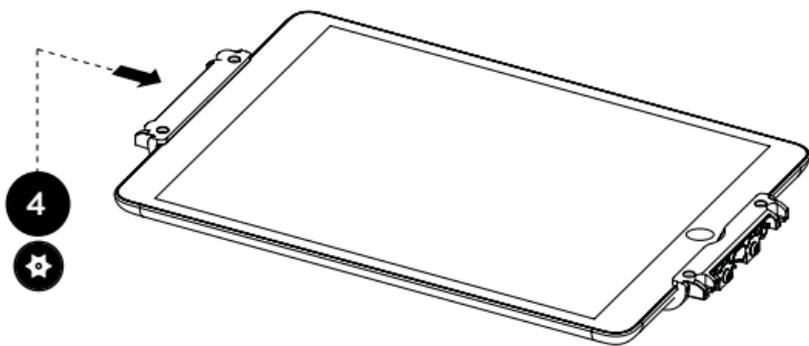

4. Position the iPad into the frame and tighten with the security screws.  
Note: Ensure the Lightning port is aligned in the correct orientation.  
(See Home button indentation)

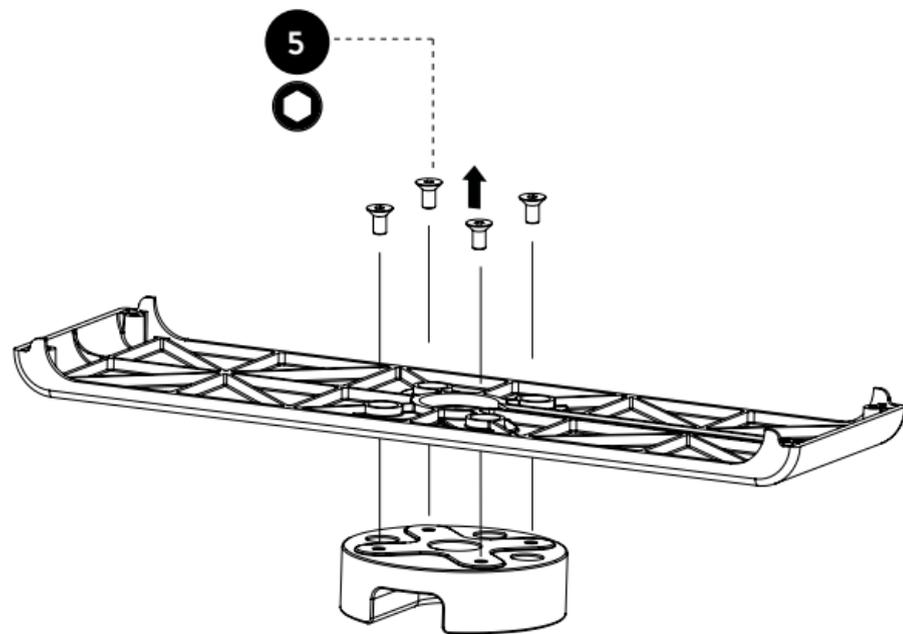

5. Using the Hex Key, remove the 4 screws holding the Lock Belt frame to the body of the Wall Mount.

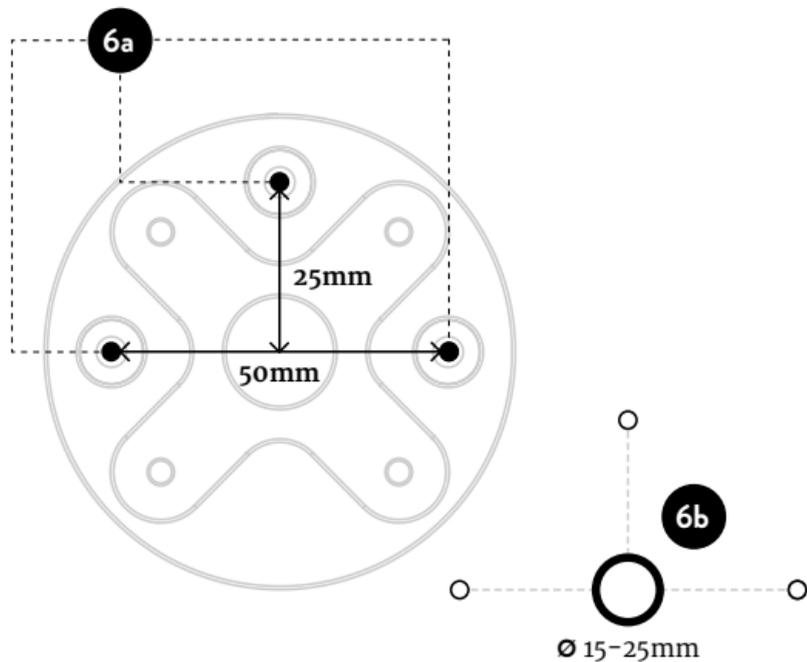


**6a.** On your wall, measure out and mark the points where you will be drilling.

Note: We recommend using a spirit level for perfect alignment.

**6b.** If you intend to tunnel the charging cable through the wall, you must also make a 15-25mm hole in the centre of the mounting position.


If not, you may skip this step.

Note: Read carefully the Safety Notice on page 7 before drilling into the wall.

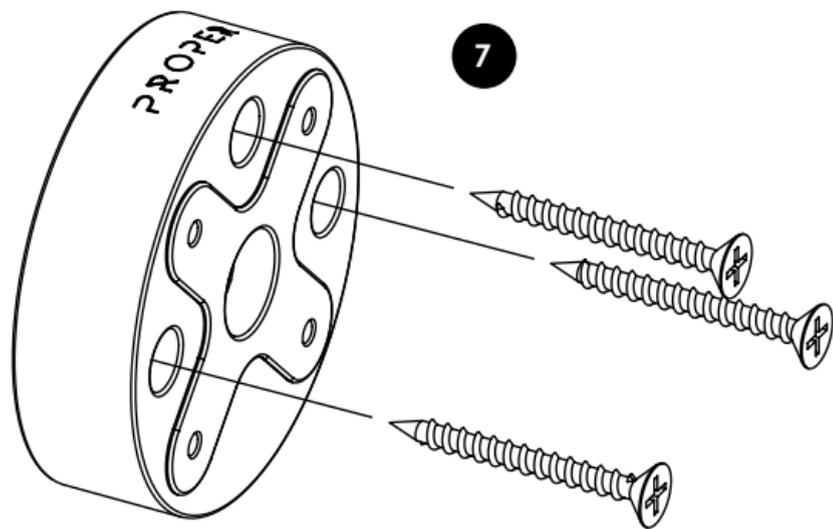


**7. Screw the Wall Mount into the wall.**

Note: As the Wall Mount can be mounted onto a variety of surfaces, we are unable to provide certain hardware (such as screws) to assist in mounting to every wall. You will need to source the appropriate tools for your particular use case. If you are in any way unsure, consider contacting a licensed professional.

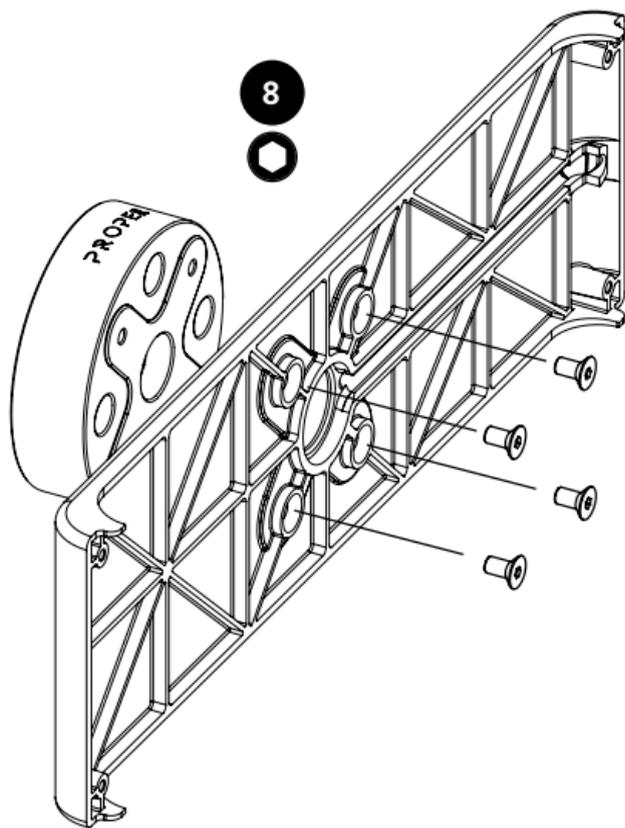


8. Using the Hex Key, re-attach the 4 screws holding the Lock Belt to the body of the Wall Mount.

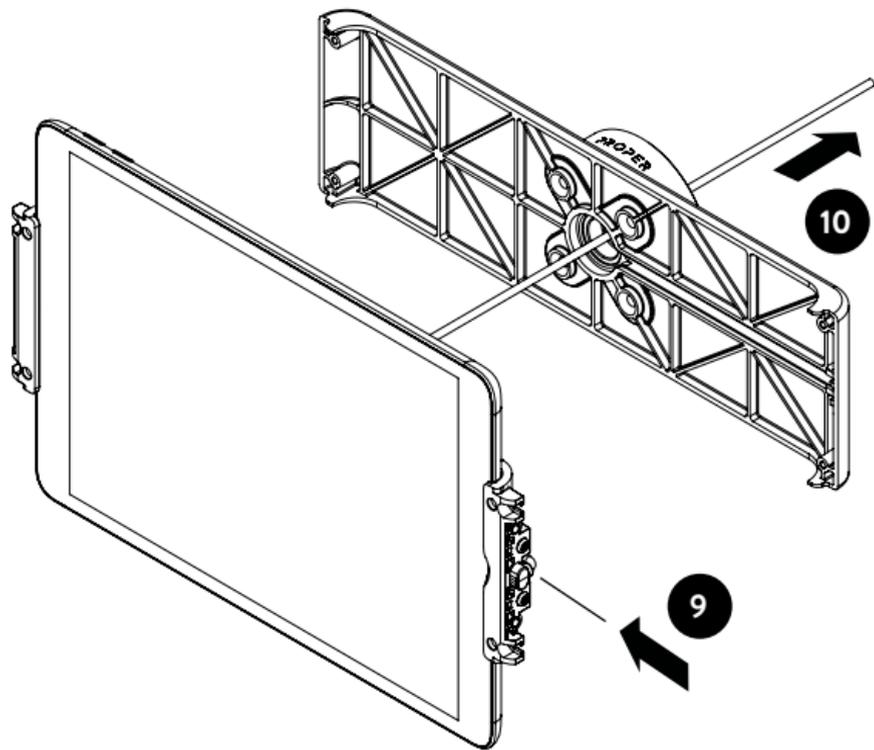

9. Connect the Lightning cable to the iPad. There are clips underneath to hold it in place.

10. Pass the USB end of the cable through the wall mount.

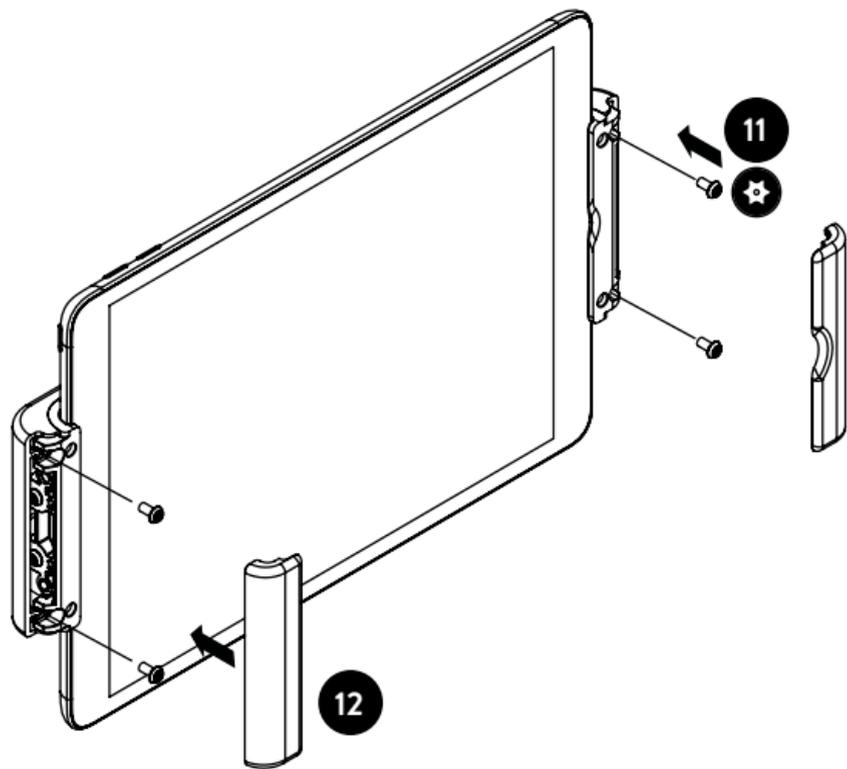

**11.** Use the Security Tool to attach the iPad to the frame.

**12.** Push the end caps back onto the frame to secure the iPad in place.