
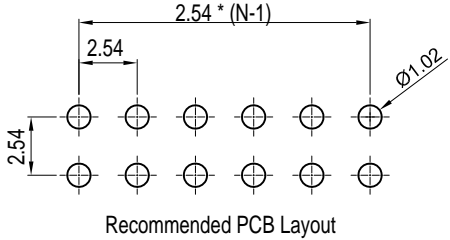


- Notes:
- Electrical Characteristics:
    - 1 Contact Resistance: 20mΩ Max
    - 2 Dielectric Withstanding Voltage: 600V AC(rms) for 1 Minute
    - 3 Insulation Resistance: 1000mΩ Min
    - 4 Current Rating: 3A
    - 5 Voltage Rating: 250V AC rms
  - Environment Characteristics:
    - 1 Temperature: -40°C ~ +105°C
  - Materials:
    - 1 Contact Materials: Copper Alloy
    - 2 Contact Plating: Tin or Gold plate
    - 3 Insulator Materials: PBT, Black, UL94V-0 or High temperature Materials like PA46/PA6T/PA9T

How to Order:  
 PBS(F) - 2.54- 1xN GF (XX) - (XX)  
 PBD(F) - 2.54- 2xN GF (XX) - (XX)

Standard Insulator Material: PBT ( No Mark)  
 Customer Request: PA46 / PA6T / PA9T ...  
 Pin Length: L = 11mm / 5mm.....  
 G - Gold Plate ; GF - Gold Flash ; T - Tiin Plate  
 Poles from 02 to 40

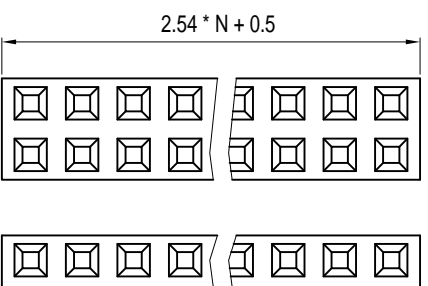

		<b>GENERAL TOLERANCE</b>		<b>DESIGN:</b> 黄 语 惠	<b>DATE:</b> 2020.02.28	<b>DWG. NO.:</b> YH-PBS(F)/PBD(F)-001A-001	<b>TITLE:</b> 2.54mm Female header, Straight Pin size - 0.64 * 0.60
		X* ± 5.0°	X. ± 0.30	<b>CHECK:</b> 忠 诚	<b>DATE:</b> 2020.03.02		
		.X* ± 3.0°	.X ± 0.25	<b>AUDIT:</b> 忠 诚	<b>DATE:</b> 2020.03.02	<b>PART NO.:</b> PBS(F)/PBD(F)-2.54-1 or 2 x40GF	
		.XX* ± 2.0°	.XX ± 0.15	<b>APPROVE:</b> 忠 诚	<b>DATE:</b> 2020.03.02		
		.XXX* ± 1.0°	.XXX ± 0.10				

<b>REV.:</b> 01	<b>UNIT.:</b> mm	<b>SCALE.:</b> 1:1	<b>PAGE.:</b> 1/1	
--------------------	---------------------	-----------------------	----------------------	--