

1.8° 42MM High Torque Hybrid Stepping Motor


Item	Specifications
Step Angle	1.8°
Step Angle Accuracy	±5% (full step, no load)
Resistance Accuracy	±10%
Inductance Accuracy	±20%
Temperatru Rise	80°CMax. (rated current,2 phase on)
Ambient Temperatuar	-20°C~+50°C
Insulation Resistance	100M?Min.,500VDC
Dielectric Strength	500VAC/ for one minute
Shaft Radial Play	0.02Max. (450 g-load)
Shaft Axial Play	0.08Max. (450 g-load)
Max. radial force	28N (20mm foom the flange)
Max.axial force	10N



● 42MM Hybrid Stepping Motor Specifications

Model No	Rated Voltage	Current /phase	Resistance /phase	Inductance /phase	Holding Torque	#of Leads	Moment of inertia	Weinght	Orientation Torque	Length
	V	A	Ω	mH	Kg-cm		g-cm ²	kg	g-cm	mm
SL42STH40-1684A	2.8	1.68	1.5	2.8	4.0	4	68	0.28	200	40

● Dimension

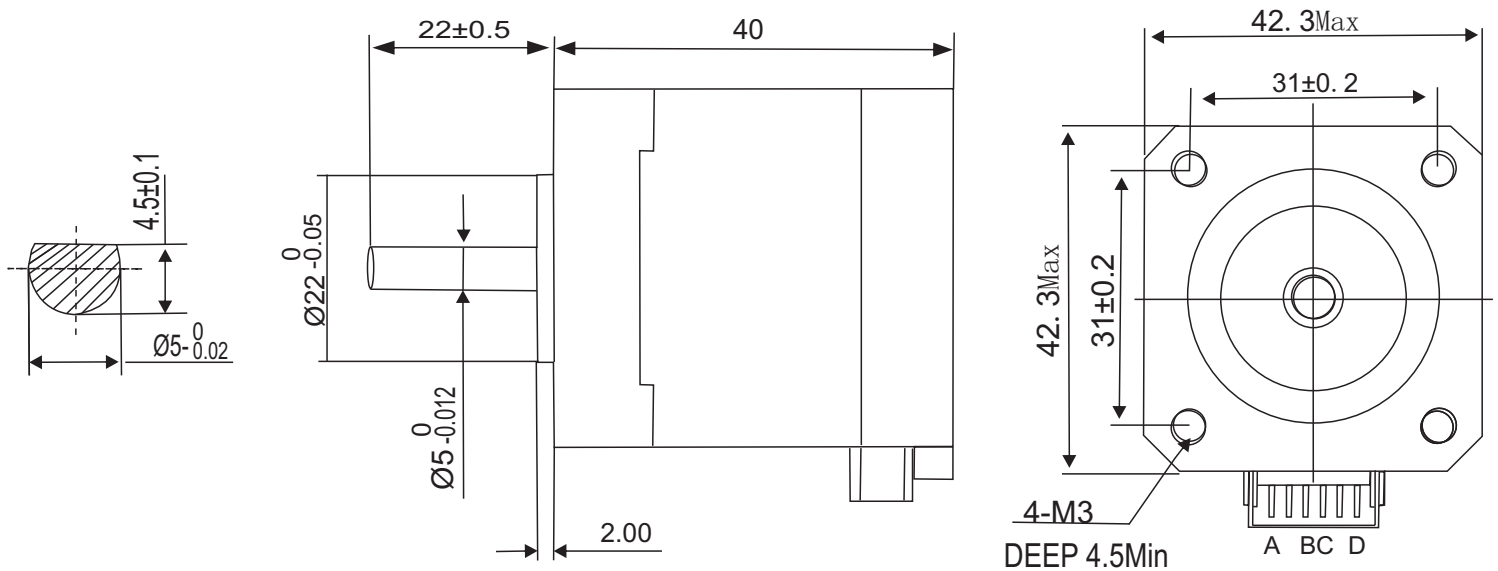

● Wiring Diagram

