


# P160系列

最小测试间距2.54mm




P160-E2  
(P1600-E2)  
(P1601-E2)  
(P1602-E2)

(1.80) (3.00)  
(1.50) (2.54)  
(1.20) (2.20)

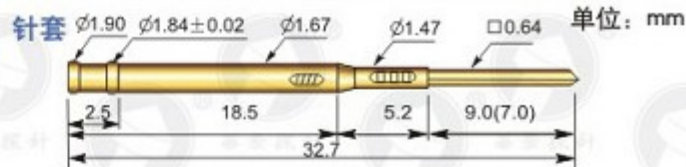

R160-1W(RT160-1W)

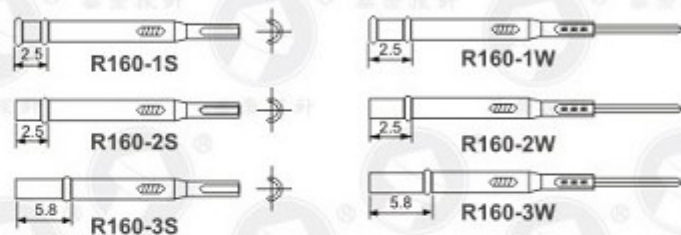


## 材料

针管 磷铜管镀金  
弹簧 不锈钢线  
套管 黄铜管镀金  
针杆

国产料 磷铜镀镍  
进口料 镀铜(或SK4)镀镍(或金/铱)  
(用NEW标识)

钻孔尺寸 1.70mm  
额定电流 3安培  
接触电阻 50毫欧姆  
4mm行程弹力 (40g)(60g)(100g)  
180g(280g)(340g)  
(括号内为定制品)

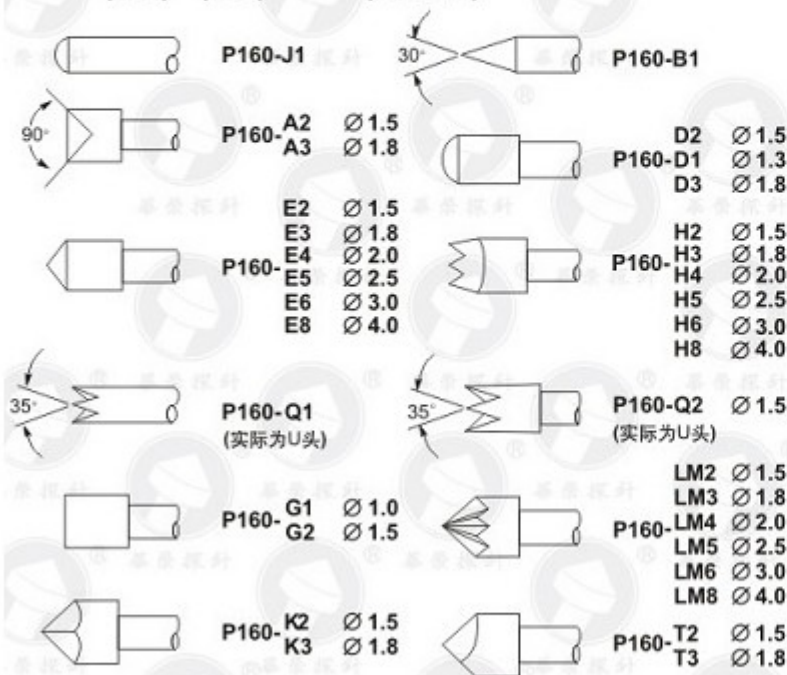

\*另有UB160-B 180g提供