



575 LED

Installation Guide



IMPORTANT:

READ THESE INSTRUCTIONS BEFORE OPERATING. BEFORE USING THESE HEADLIGHTS, READ THIS MANUAL COMPLETELY AND THOROUGHLY, UNDERSTAND ITS OPERATING PROCEDURES, SAFETY WARNINGS, AND MAINTENANCE REQUIREMENTS.

LIMITED WARRANTY

DAPPER LLC WARRANTS TO ITS CUSTOMERS THAT THE COMPANY'S DAPPER LIGHTING BRANDED PRODUCTS ARE FREE FROM DEFECTS IN WORKMANSHIP AND MATERIALS.

Dapper LLC will repair or replace its Dapper Lighting branded products which fail to give satisfactory performance due to defective workmanship or materials, based upon the terms and conditions of the following described warranty plans attributed to that specific product.

Most products carry a FIVE-YEAR warranty. During this warranty period, Dapper LLC will repair or replace at our option any part or unit which proves to be defective in material or workmanship.

This warranty does NOT cover damage to equipment arising from alteration, abuse, misuse, damage, installation error, and does not cover any repairs or replacement made by anyone other than Dapper LLC.

The foregoing obligation is Dapper LLCs' sole liability under this or any implied warranty and under no circumstances shall we be liable for any incidental or consequential damages.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. If you have any questions regarding warranty service, please contact Dapper LLC.



575 HEADLIGHT

Removal Guide

The first part of this installation guide is stock headlamp removal. Once you have completed this first part, move on to the 575 LED Installation Guide.

If you are not sure which type of kit you ordered or have any other installation questions, please give us a call at (833) DAPPER-1 to speak with a knowledgeable technician.



Note:

If you purchased a 575 Relay Harness, check out our “Relay Harness Installation Guide” and install that first, then return to this installation guide.

Let's get started.

To begin, make sure you have all necessary Dapper Lighting components as well as a few common tools. Below is a list of what is required:



Parts Diagram

1. Low Beam 575 Headlights x 2
2. High Beam 575 Headlights x 2
3. Low Beam H11-H4 Adapter x 2
4. High Beam H11-H4 Adapter x 2
5. *(Optional)* 575 Relay Harness



Tools Diagram

1. Socket Wrench
2. Phillips Screw Driver
3. Wire Cutters
4. Zip Ties

For your safety, please disconnect your battery and prepare to remove your stock headlamps.




Locate your mounting screws on your existing headlights and dismount your headlight.



Be sure to unplug the H4 connectors as you are removing your headlamp.

Look into the center of the 575 headlamps from behind to determine if the unit is a high or low projector.

Be sure not to confuse low beam and high beam projectors.

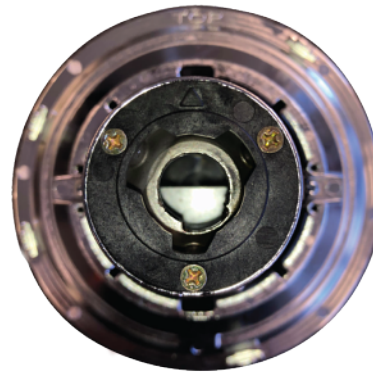

Low Beam

If there is a cut off shield, the unit is LOW.



High Beam

If there is no shield, the unit is HIGH.

*Dapper
lighting*

575 LED Installation Guide

Parts Diagram

1. 17W or 30W LED Bulbs x 2 (Low or High)



2. H11H4AD-L/H Wiring Adapters x 2



Inserting Your Bulbs

Lock your 17W or 30W LEDs into the lamp and secure them into the 575 projectors by turning them clockwise. There is no difference between low beam or high beam LED bulbs.

***NOTE:**

If you did not purchase LED bulbs, you can upgrade later. No modification is needed. Contact us for more information.



Wiring Preparation

Find the appropriate wiring adapters for the low beam and high beam units. Please follow the designation.



3-Pin Adapter

H11H4AD-L - is Low Beam




2-Pin Adapter

H11H4AD-H - is High Beam

Connecting Your Bulbs

Take your provided H11-H4 Adapter and attach them to the appropriate housing by inserting the H11 connector into the back of the bulb and the H4 connector into your stock headlamp plug. (See Low Beam & High Beam Wiring Diagram on page 11).

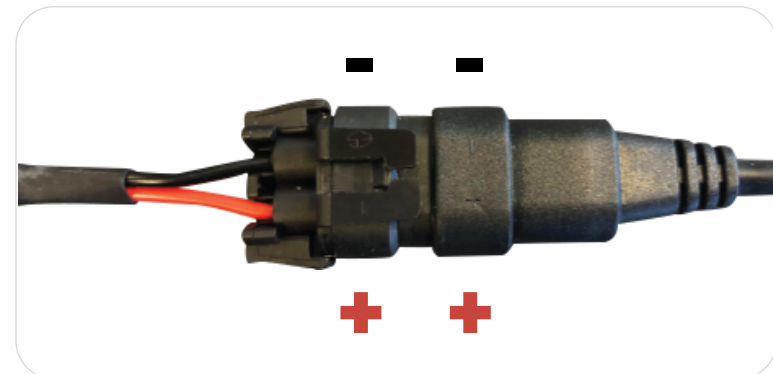

***WARNING:**

Make sure to double check polarity.

Bi-LED Set (Special Order Item)

(Only if you have ordered a Bi-Halogen set) - If you have a Bi-Halogen unit, you will have a white connector on your adapter. This will plug into the high/low control wire (blue) on your Bi-Halogen projector. (See B-LED (Special Order Item) Wiring Diagram on page 11).

Mounting Your 575


Secure your new Dapper Lighting headlights by mounting them in with the 3 tabs properly aligned. Note the TOP marking on the rear of the housing.




***WARNING:**

You may need to shape or shave the tabs with a file if they do not fit or sit completely flush. In some instances, one tab will NOT line up on certain vehicles. Shaving tabs does NOT void warranty.

Low Beam & High Beam Wiring Diagram

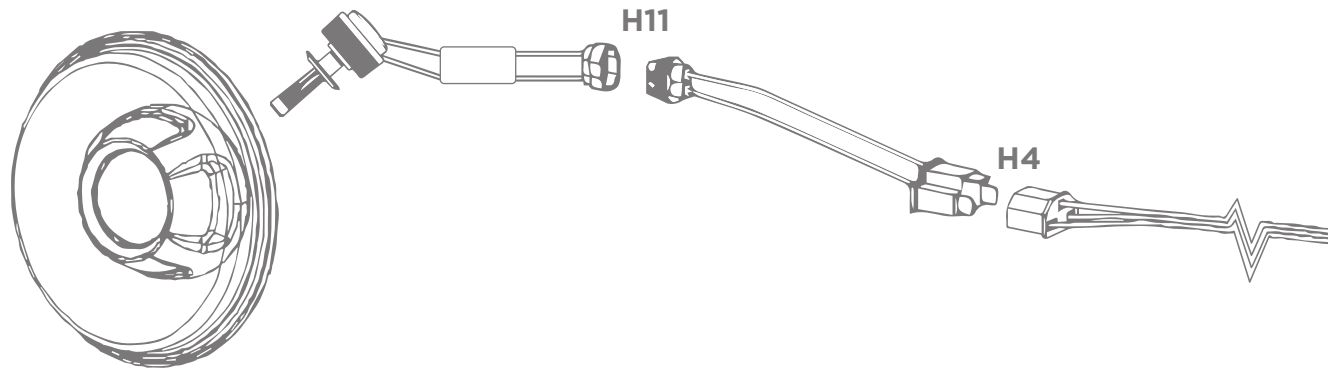

Bi-LED (Special Order Item) Wiring Diagram

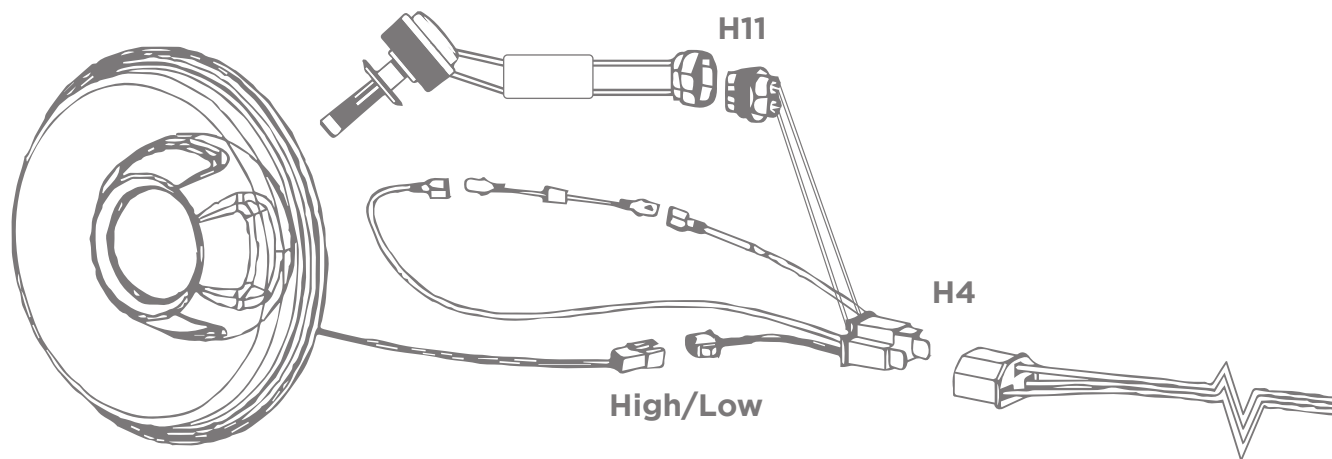

Wiring Your Halos

The 575 units come with multiple styles and choices of halos. Please visit www.dapperlighting.com/pages/halo-guides for video install instructions.

LED Low Beam & Halogen High Beam Diagram

* LED High is the same wiring

