

## AT&T CopperLine Panels

### Shielded Snap-in Blank Patch Panels for Angled Jacks

#### Description


24 port shielded blank 19" panels	
KSJ type compatibility	Shielded or unshielded 180° angled RJ45 jacks
Category compatibility	CAT5e CAT6 CAT6A
KSJ insertion method	Back loading
Formation	24 ports in two rows (1U)
Front cable organizer	None
Back cable organizer	Folding frame with snap-in cable grips
Shield	All shielded jacks grounded through the panel

#### Standard & EU Directives Conformance

- UL94 V-0 flame test
- EU Directive 2011/65/EU (RoHS-2)

#### Mechanical Properties and Features

Frame	Galvanized corrosion resistant steel
Paint	Powder paint finish
Operating temperature	-20 to +60C at 5-95% RH (non condensing)
Storage temperature	-20 to +80C
Plastic parts	High-impact flame retardant materials
Port identification	Designated space next to each port
Panel identification	Designated space at the panel front

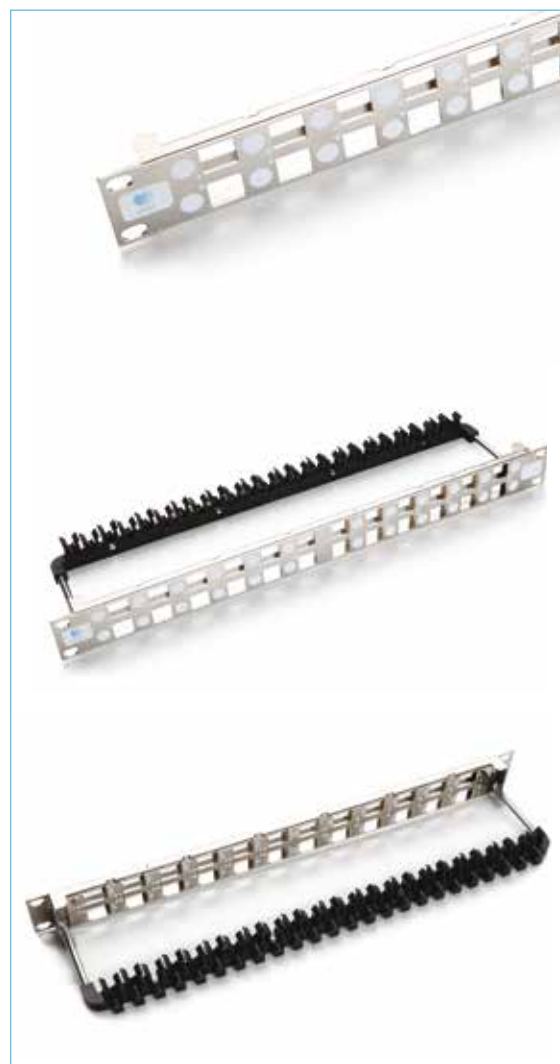

#### Ordering Information

Description	Color	Units	Size mm	Packaging	P/N
24 Port Shielded 19" Snap-in Blank Patch Panel (Angled Jacks)	Metal	1U	44.4x483	1/Box	13S00NV024B-MT1U