

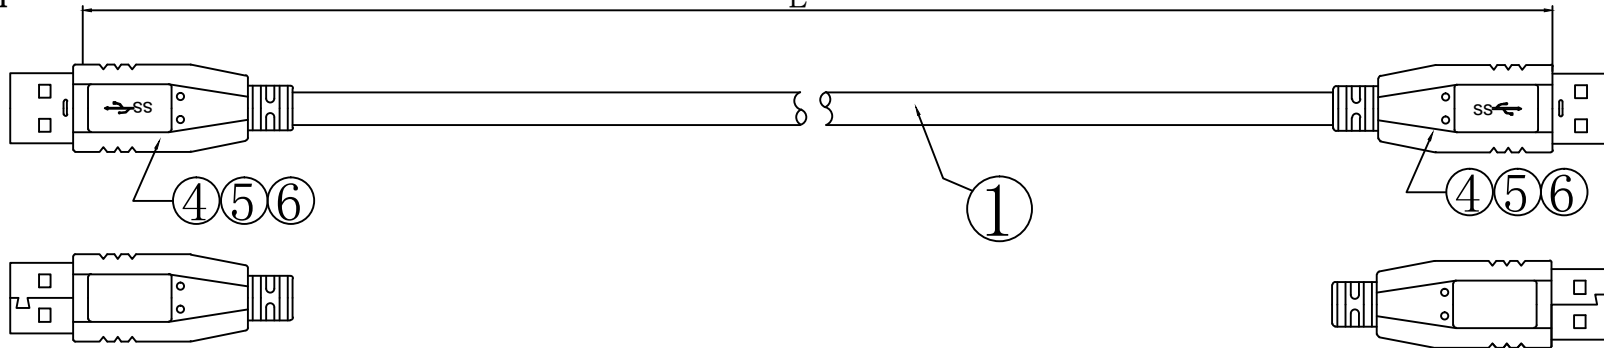




P1  
USB"A"M

P2  
USB"A"M



	L
CAB-USB-72	2000 ± 30mm
CAB-USB-73	3000 ± 50mm

Pin Out:

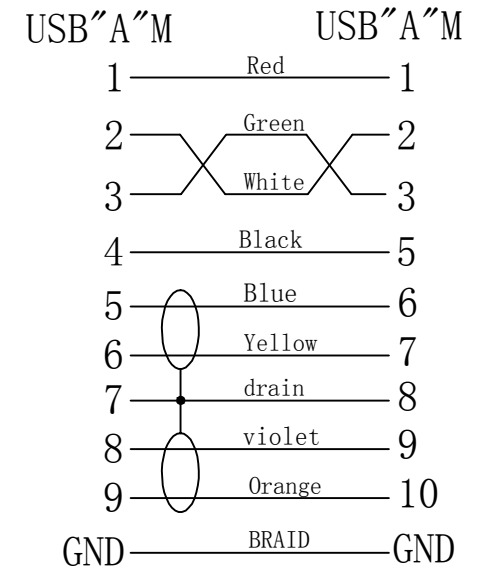

NO	Material	Specification	Unit	QTY	Remarks
①	Cable	UL20276 (1P * 28#+D+AL+M)*2C+1P*28#+24# * 2C+AL+D+B Blue OD5.5 RoHS	M	L	
②	Connector	USB AM 3.0 TERMINALS GOLD-PLATED RoHS	PCS	2	
③	Tin line	Wire ODO.8 RoHS	G	0.28	
④	Inner mold	LD-PE RoHS	Kg	0.003	
⑤	Outer mold	Blue PVC UL30031 45P RoHS	Kg	0.016	

Electroinc Test:insulation resistance:10mΩ conduction impedance:5Ω high-pressure test:300v

DUELTEK DISTRIBUTION

	SCALE:	UNIT:	VERSION:	DRAWING: XIONG CHANG
	NO.	MM.	A/O	CHECKED BY ENGINEER:
CUSTOMER:	NAME:			APPROVED BY MANAGER:
DRAWING NO:	DATE:			APPROVED BY SALES:
	2015/12/31			