



USB 3.0 to Gigabit Adapter + USB Hub TU3-ETGH3 (v1.0R)

- · Add one Gigabit Ethernet port
- Add three 5 Gbps USB 3.0 ports
- PC and Mac® compatible
- Flexible USB 3.0 cable accommodates most installations
- Backward compatible with USB 2.0 and 1.1 ports
- Full power for power hungry USB devices

TRENDnet's USB 3.0 to Gigabit Adapter + USB Hub, model TU3-ETGH3, adds a Gigabit Ethernet port and three 5 Gbps SuperSpeed USB 3.0 ports to a Windows® or Mac® computer. The TU3- ETGH3 is also compatible with USB 2.0 and 1.1 ports. An included optional power adapter provides full power to power hungry USB devices.



Features



Gigabit Ethernet

Adds a Gigabit Ethernet port



SuperSpeed USB 3.0

Adds three USB 3.0 ports which support 5 Gbps speeds when connected to a USB 3.0 port $\,$



Flexible Connector

Attached flexible 10 cm (4 in.) USB 3.0 cable accommodates most installation scenarios



Operating Systems

Compatible with Windows® and Mac® operating systems



Compatibility


Compatible with USB 2.0 and 1.1 ports



Power

Optional adapter ensures operability of power hungry connected USB devices

Networking Solution

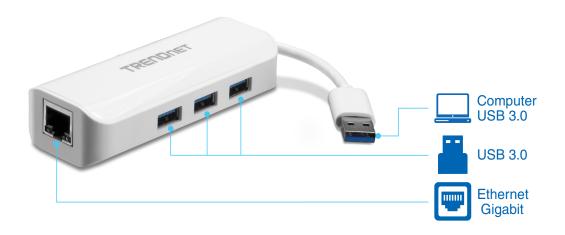



Specifications

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.3ab
- IEEE 802.3az
- USB 3.0
- USB 2.0
- USB 1.1

Device Interfaces

- 1 x type-A (male) USB 3.0 connector
- 3 x type-A (female) USB 3.0 ports
- 1 x Gigabit port

Maximum Data Rate

- Up to 2 Gbps (Gigabit port)
- Up to 5 Gbps (USB port)

Special Features

· Energy saving GREENnet technology

System Compatibility

- Windows® 8.1, 8, 7, Vista, XP
- Mac® OS 10.6 10.9

Operating Temperature

• 0 - 40 °C (32 - 104 °F)

Operating Humidity

• Max. 90% non-condensing

Certifications

- CE
- FCC

Dimensions

• 105 x 40 x 25 mm (4 x 1.6 x 1 in.)

Weight

• 64 g (2.2 oz.)

Power adapter

- Input: 100 240 V, 50 / 60 Hz, 0.5 A
- Output: 5 V DC, 2.5 A
- · Consumption: Max. 12.5 Watts

USB bus powered

- Output: 3.3 V. 500 mA
- Consumption: Max. 4.5 Watts

Warranty

• 2 year limited

Package Contents

- TU3-ETGH3
- Multi-language Quick Installation Guide
- CD-ROM (Drivers & User's Guide)
- Power adapter (5 V DC, 2.5 A)

