
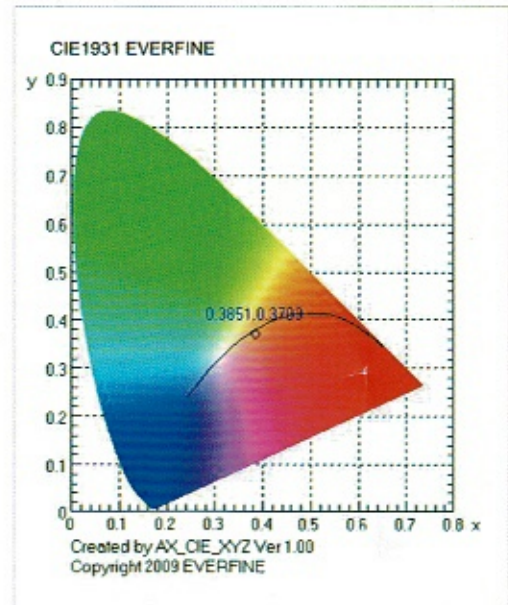


## PROGROW UFO LED MODEL

|                    |             |               |             |             |
|--------------------|-------------|---------------|-------------|-------------|
| Input Power        | 100W        | 200W          | 300W        | 500W        |
| Fixture Dimensions | Φ280*H164mm | Φ400*H196.5mm | Φ440*H140mm | Φ450*H230mm |
| Weight             | 3.00kg      | 4.00kg        | 6.00kg      | 10.00kg     |

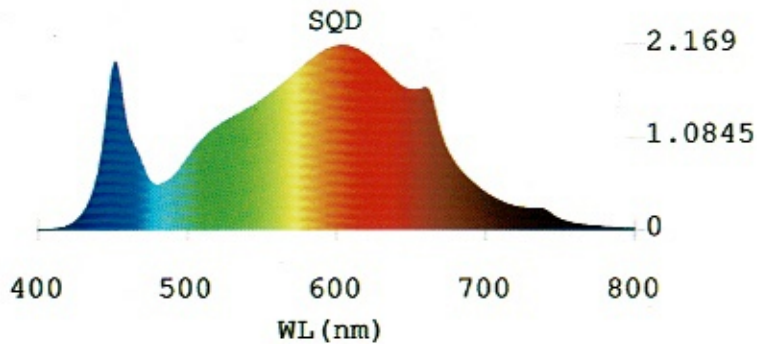

### MAXAMPERAGEBYVOLTAGESERVICE

| VOLTAGE | 120V  | 208V  | 240V  | 277V  |
|---------|-------|-------|-------|-------|
| 100W    | 0.83A | 0.48A | 0.42A | 0.36A |
| 200W    | 1.67A | 0.96A | 0.83A | 0.72A |
| 300W    | 2.50A | 1.44A | 1.25A | 1.08A |
| 500W    | 4.17A | 2.40A | 2.08A | 1.80A |

## PROGROW LED'S SPECIFICATIONS

|                        |   |
|------------------------|---|
| Light Source           | LED   |
| Efficacy               | 2.1 μmol/J  |
| Input Voltage          | Autosensing 100-277V                                  |
| Mounting Height        | ≥ 15.2cm Above Canopy                                 |
| Thermal Management     | Passive   |
| Beam Angle             | 120°  |
| Lifetime               | 50,000hrs   |
| Power Factor           | > 90%   |
| Certifications         | UL1598 Damp Location Rating & IP55 (Console Only), CE |
| Colour Rendering Index | 90ra  |
| Ambient Temperature    | -40-40°C  |
| Storage Environment    | -40°C-85°C RH10%-95%                                  |
| Chip                   | BRANDED LUMILEDS                                      |