
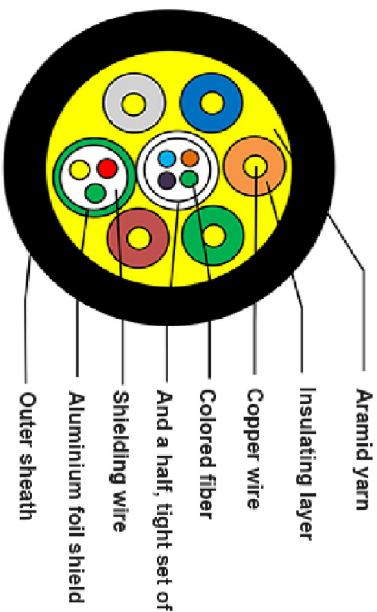


| MARK | DATE | ECN NO. | DESCRIPTION | REV. | DESIGN |
|------|------|---------|-------------|------|--------|
| △ | | | | | |

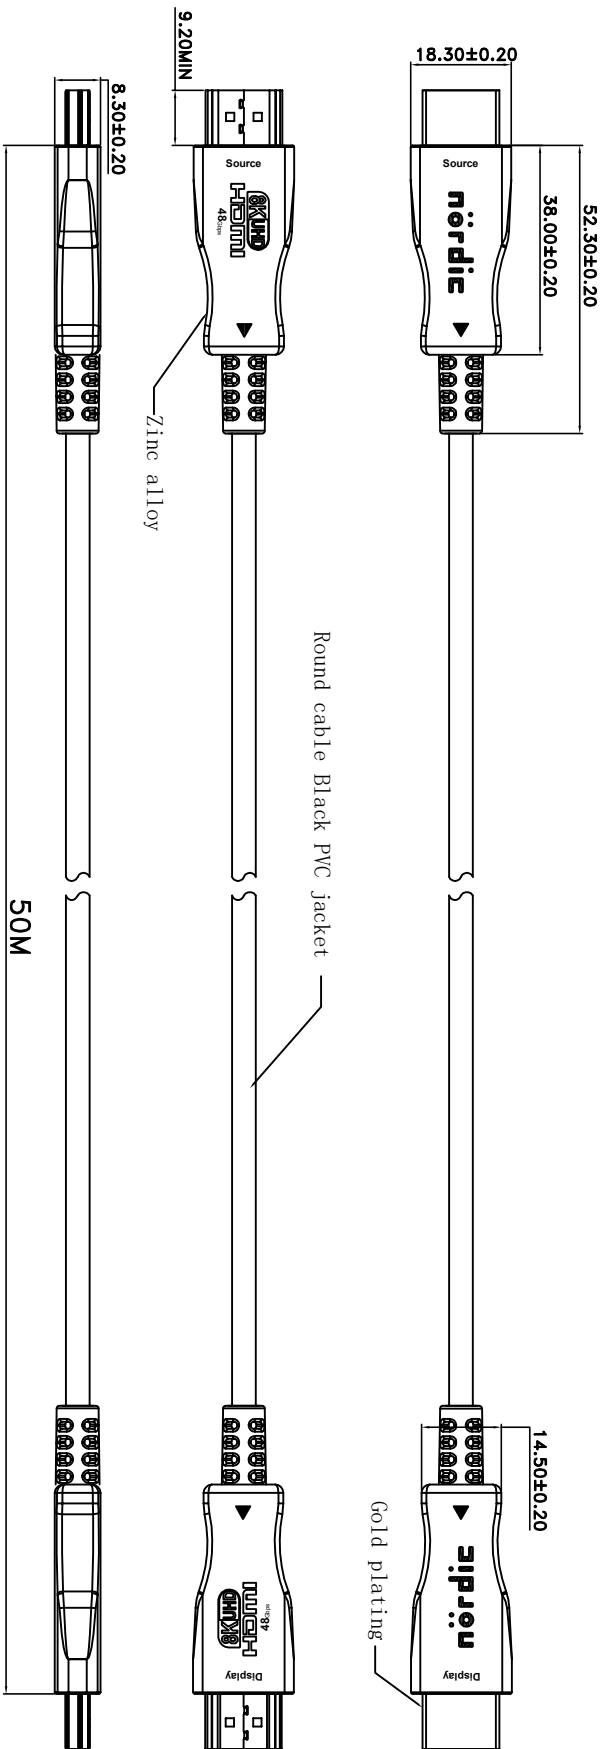

- NOTE:
- Supports computer resolutions to 4K@120Hz or 8K@60Hz 4:4:4
 - Plug and Play
 - Support HDCP2.2@ARC
 - Self-detecting function for EDID information
 - No loss of signal
 - Hybrid optical cable with fiber and copper wire
 - PIN gold plated, shell gold plated
 - Environmental Specifications: For Indoor use only;
 - Operating temperature: -40°C to 70°C
 - Minimum bending radius 20mm
 - Max. tension force: 100N
 - Powered via HDMI devices
 - 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
 - Round cable Black PVC jacket
 - RoHS 2.0 & REACH compliant
 - Packing: package 1pc box

NÖRDIC AB

| UNLESS OTHERWISE SPECIFIED TOLERANCE | | | DATE | NAME | MODEL | 单位 | 比例 | 页码 | 版本 |
|--------------------------------------|-------|------|-------|------------|-------------|----|-----|-----|----|
| ANG | TOL | DIM | TOL | 2022.05.27 | HDMI-8K AOC | mm | 1:1 | 1/1 | 1 |
| X | ±3.0' | X | ±0.10 | | | | | | |
| .XX | ±2.0' | .XX | ±0.05 | | | | | | |
| .XXX | ±1.0' | .XXX | ±0.03 | | | | | | |