



| MARK | DATE | ECON NO. | DESCRIPTION | REV. | DESIGN |
|------|------|----------|-------------|------|--------|
| △ | | | | | |

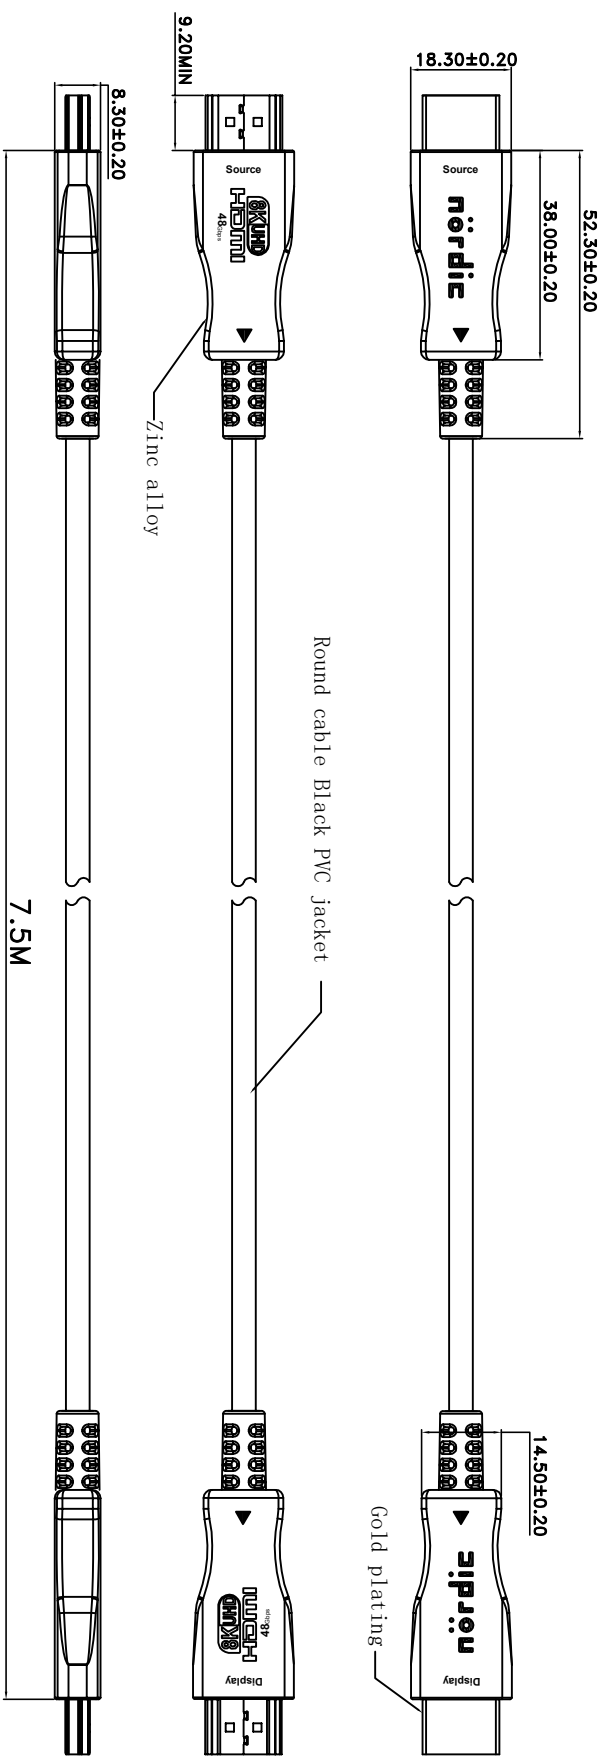

NOTE:

- Supports computer resolutions to 4K@120Hz or 8K@60Hz 4:4:4
- Plug and Play
- Support HDCP2.2@eARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc box

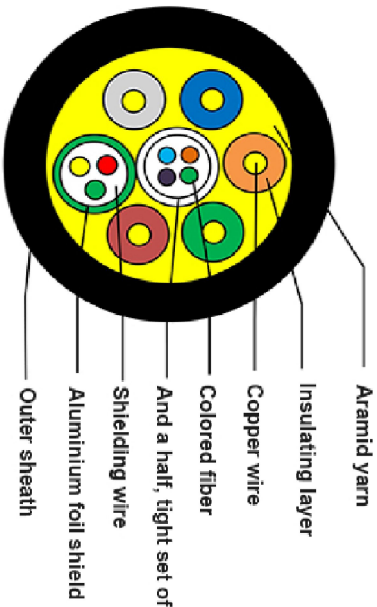

NÖRDIC AB

| UNLESS OTHERWISE SPECIFIED TOLERANCE | | | DATE | NAME | MODEL | 單位 | 比例 | 頁碼 | 版本 |
|--------------------------------------|-------|------|-------|------------|-------------|----|-----|-----|----|
| ANG | TOL. | DIM | TOL. | 2022.05.27 | HDMI-8K AOC | mm | 1:1 | 1/1 | 1 |
| .X | ±3.0' | .X | ±0.10 | | | | | | |
| .XX | ±2.0' | .XX | ±0.05 | | | | | | |
| .XXX | ±1.0' | .XXX | ±0.03 | | | | | | |