



MARK	DATE	ECON NO.	DESCRIPTION	REV.	DESIGN
△1					

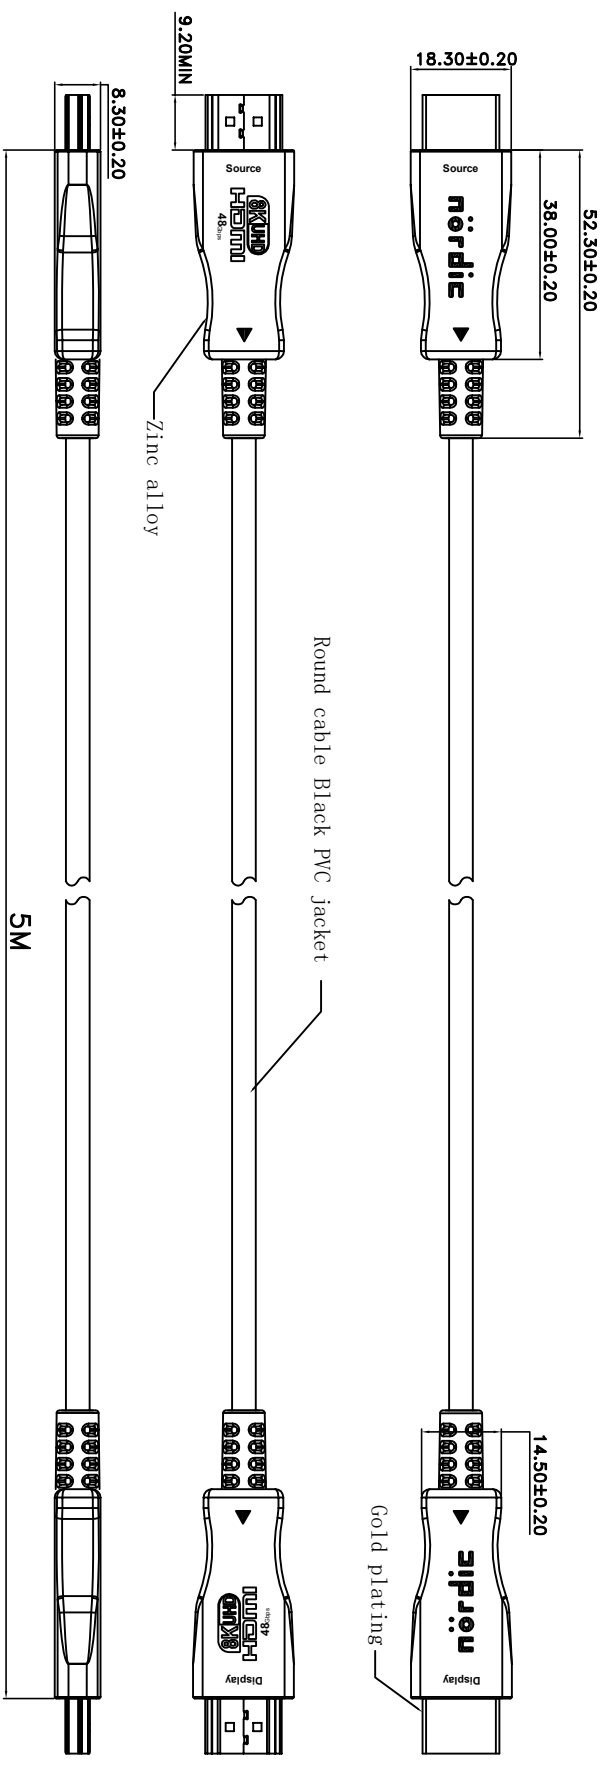

- NOTE:
- Supports computer resolutions to 4K@120Hz or 8K@60Hz 4:4:4
 - Plug and Play
 - Support HDCP2.2@ARC
 - Self-detecting function for EDID information
 - No loss of signal
 - Hybrid optical cable with fiber and copper wire
 - PIN gold plated, shell gold plated
 - Environmental Specifications: For Indoor use only;
 - Operating temperature: -40°C to 70°C
 - Minimum bending radius 20mm
 - Max. tension force: 100N
 - Powered via HDMI devices
 - 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
 - Round cable Black PVC jacket
 - RoHS 2.0 & REACH compliant
 - Packing: package 1pc box

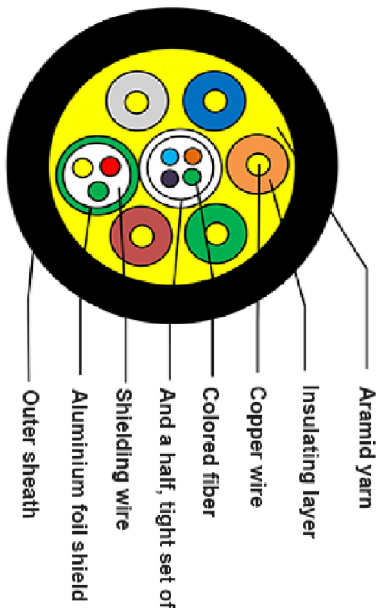

NÖRDIC AB

UNLESS OTHERWISE SPECIFIED TOLERANCE			DATE	NAME	MODEL	单位	比例	页码	版本
ANG	TOL	DIM	TOL	2022.05.27	HDMI 8K AOC	mm	1:1	1/1	1
.X	±3.0'	.X	±0.10						
.XX	±2.0'	.XX	±0.05						
.XXX	±1.0'	.XXX	±0.03						