



MARK	DATE	ECON NO.	DESCRIPTION	REV.	DESIGN
△1					

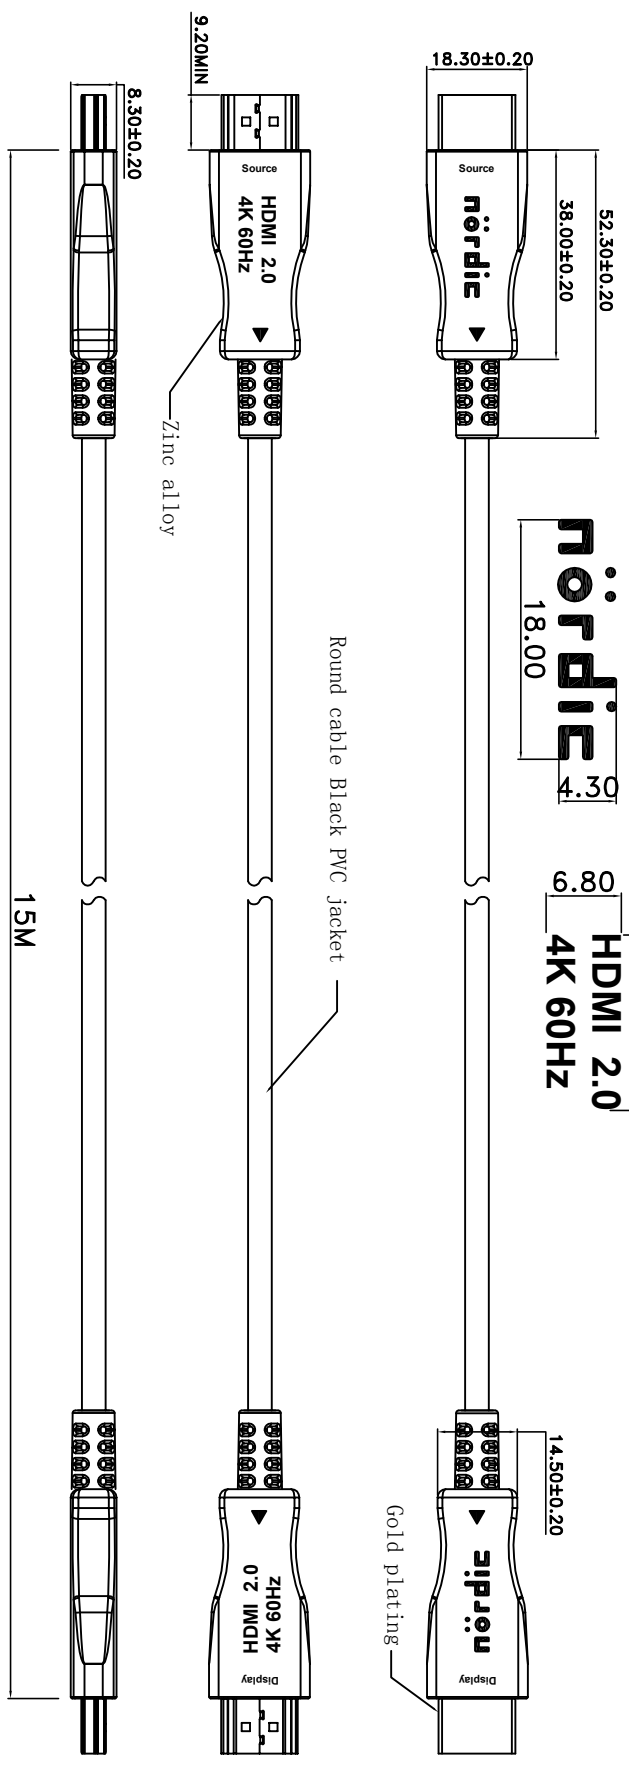

NOTE:

- Supports computer resolutions to 4K@60Hz@4:4:4
- Plug and Play
- Compatible with HDMI 2.0 standard.
- Support HDCP2.2@ARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel

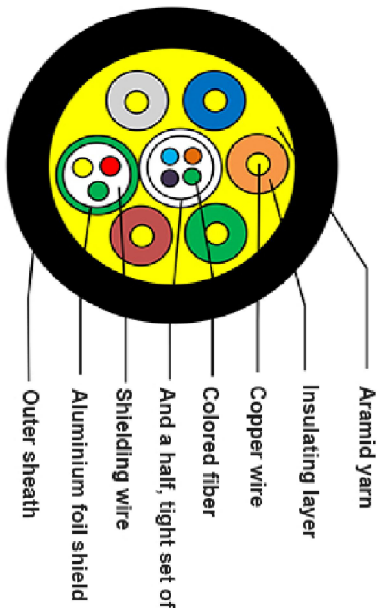

NÖRDIC AB

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.10
.XX	±2.0°	.XX	±0.05
.XXX	±1.0°	.XXX	±0.03

DATE		2022.02.22					
NAME	HDMI 2.0 AOC	MODEL	HDMI-F015				
DATE	2022.02.22	NAME	HDMI 2.0 AOC				
MODEL	HDMI-F015	DATE	2022.02.22				
单位	mm	比例	1:1	页码	1/1	版本	1