



MARK	DATE	EON NO.	DESCRIPTION	REV.	DESIGN
△1					

nördic
18.00
4.30

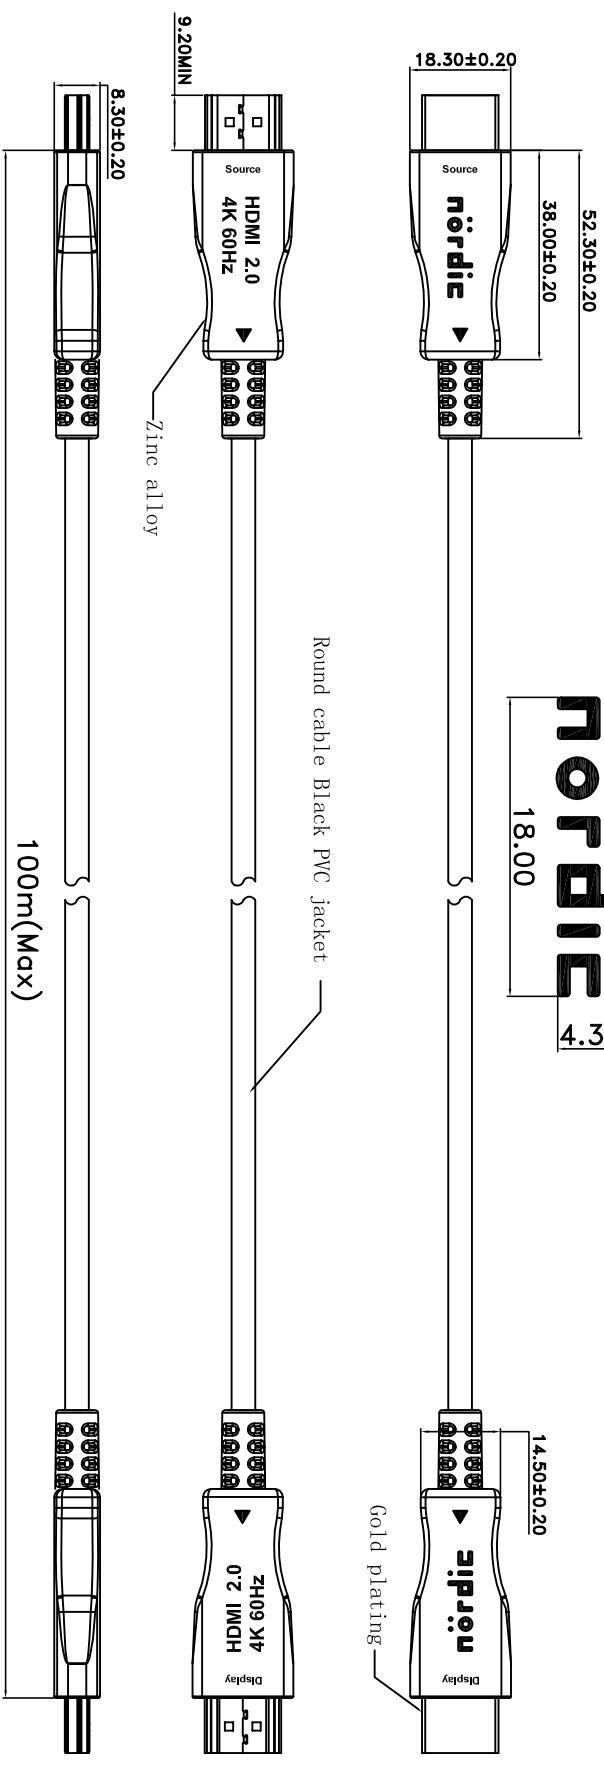

NOTE:

- Supports computer resolutions to 4K@60Hz@4:4:4
- Plug and Play
- Compatible with HDMI 2.0 standard.
- Support HDCP2.2@ARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel

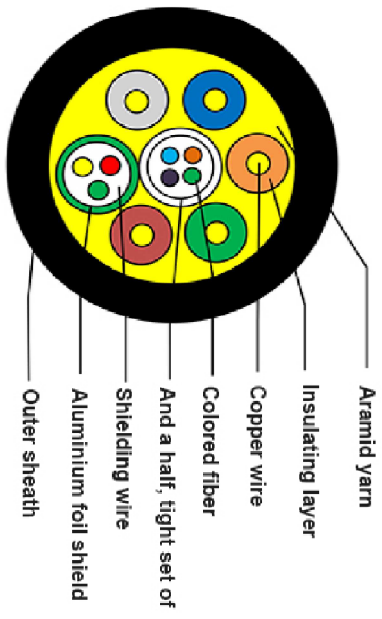

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	$\pm 3.0^\circ$.X	± 0.10
.XX	$\pm 2.0^\circ$.XX	± 0.05
.XXX	$\pm 1.0^\circ$.XXX	± 0.03

赤壁市高清光电科技有限公司
Chibi HD photoelectric technology co., Ltd

图号	日期	品名	HDMI 3.0AOC
制图	2022.02.22	产品编号	
审核		单位	mm
核准		比例	1:1
		页码	1/1
		版本	1