
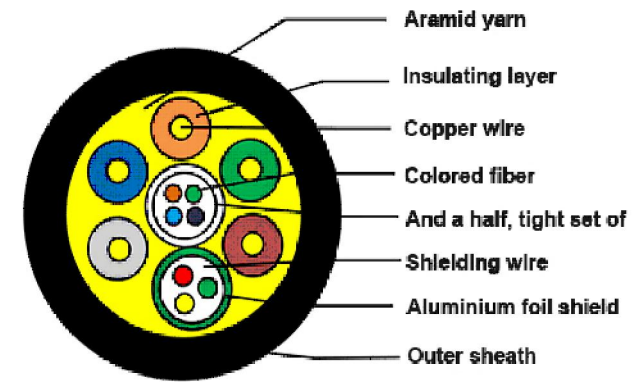


MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
△					

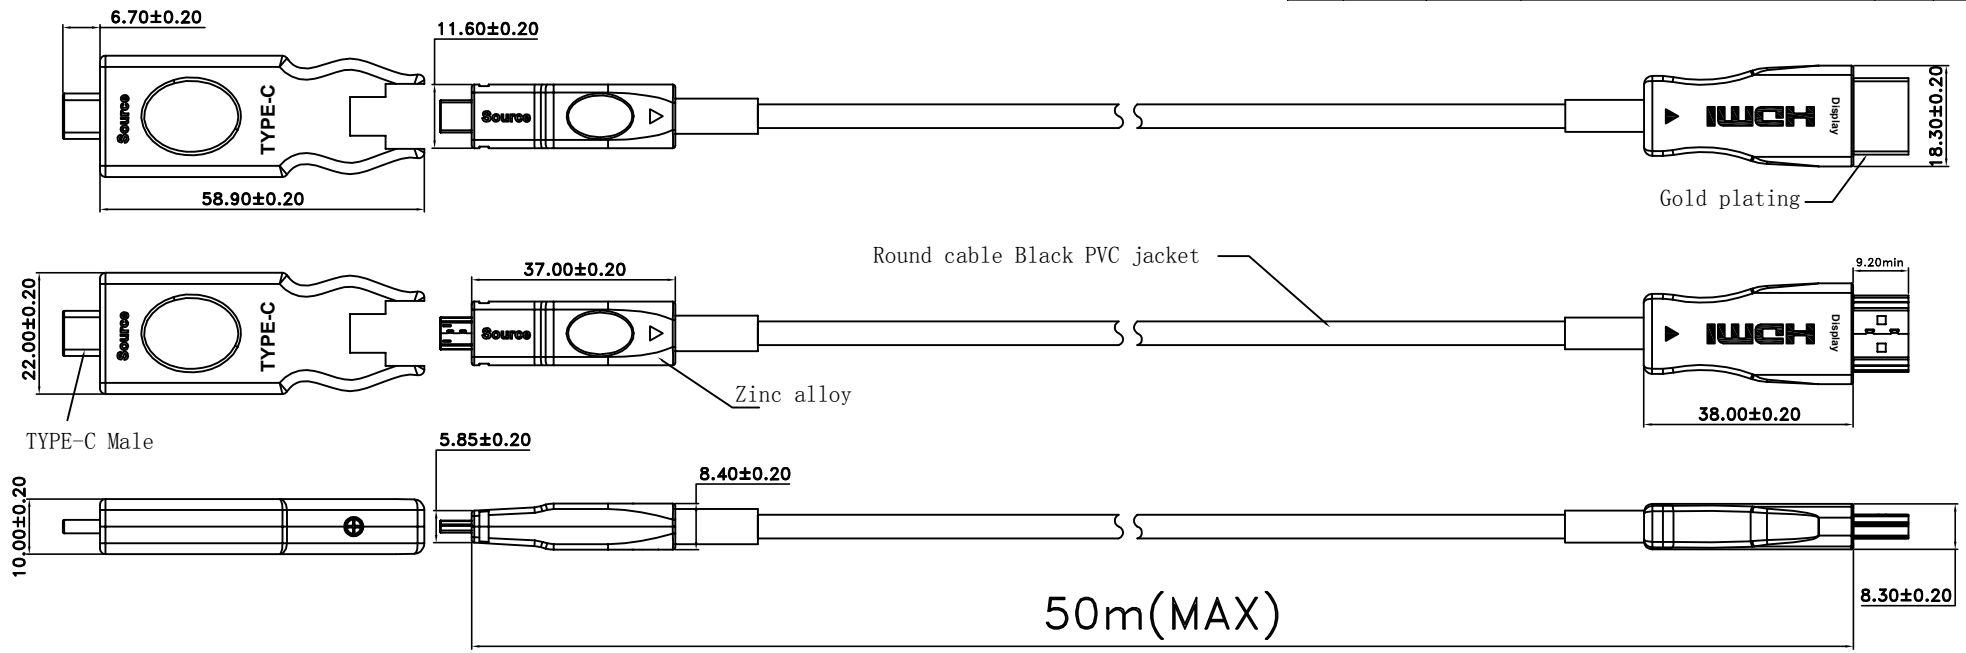

NOTE:

- Supports computer resolutions to 4K@60Hz 4:4:4
- Plug and Play
- Support HDCP2.2
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel


赤壁市高清光电科技有限公司
Chibi HD photoelectric technology co., Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCE				图号	日期	品名	HDMI 8K AM-DM-AM(AOC)				
ANG	TOL	DIM	TOL	制图	CLH	2022.01.19	产品编号	GQ-22-301			
.X	±3.0'	.X	±0.10	审核				单位	比例	页码	版本
.XX	±2.0'	.XX	±0.05	核准				mm	1:1	1/1	1
.XXX	±1.0'	.XXX	±0.03								

由 Autodesk 教育版产品制作


由 Autodesk 教育版产品制作

MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
△					

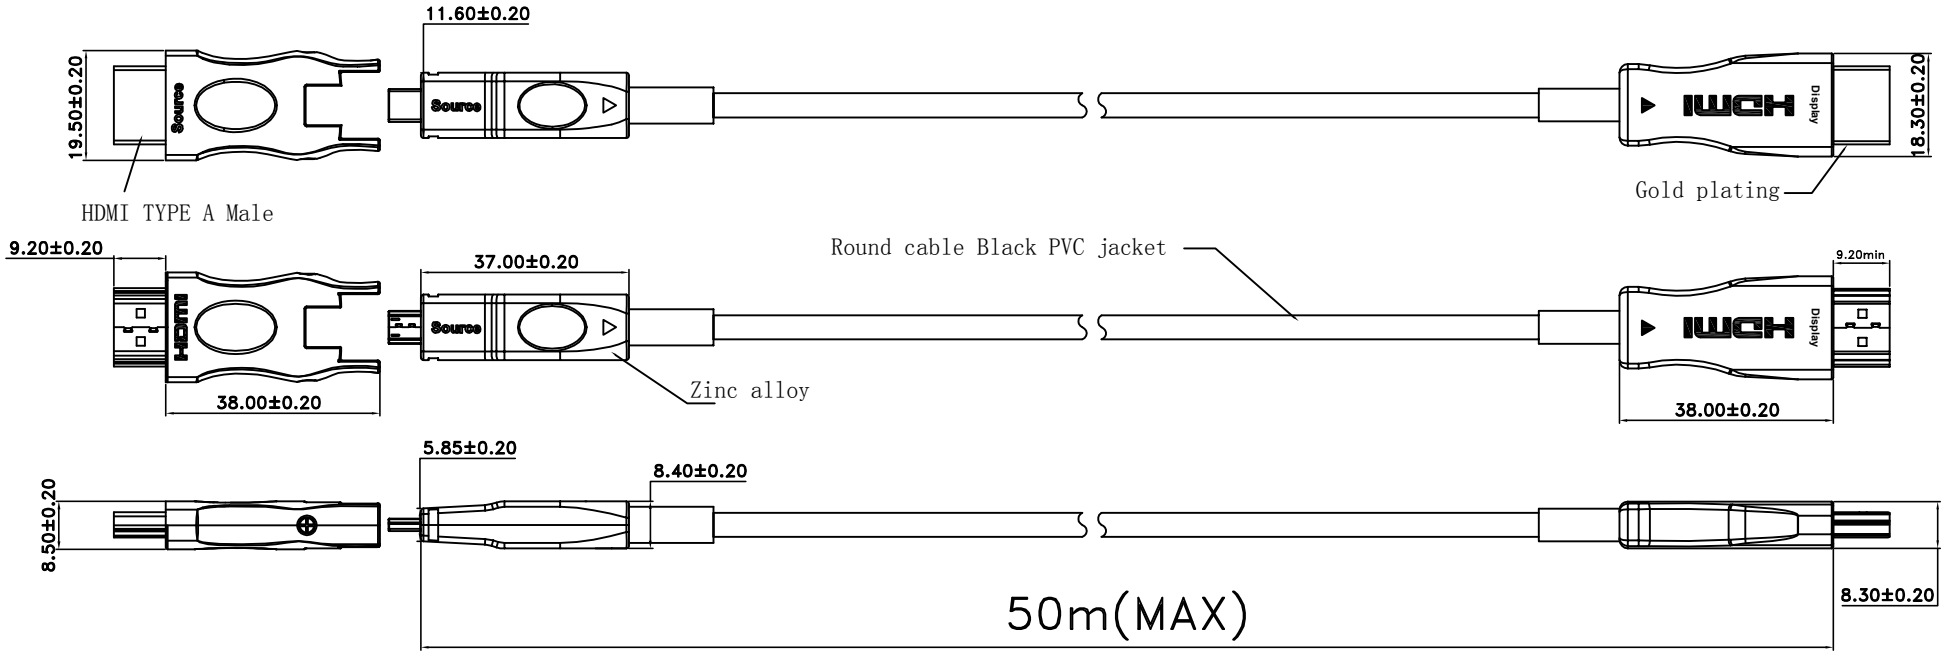

NOTE:

- Supports computer resolutions to 4K@60Hz 4:4:4
- Plug and Play
- Support HDCP2.2@ARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel

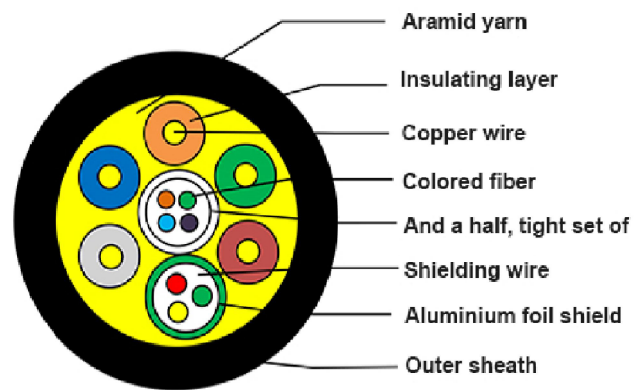


赤壁市高清光电科技有限公司
Chibi HD photoelectric technology co., Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCE				图号	日期	品名	HDMI 8K AM-DM-AM(AOC)			
ANG	TOL	DIM	TOL	制图	2022.01.19	产品编号	GQ-22-301			
.X	±3.0'	.X	±0.10	审核						
.XX	±2.0'	.XX	±0.05	核准						
						单位	比例	页码	版本	
						mm	1:1	1/1	1	

由 Autodesk 教育版产品制作


由 Autodesk 教育版产品制作

MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
△					

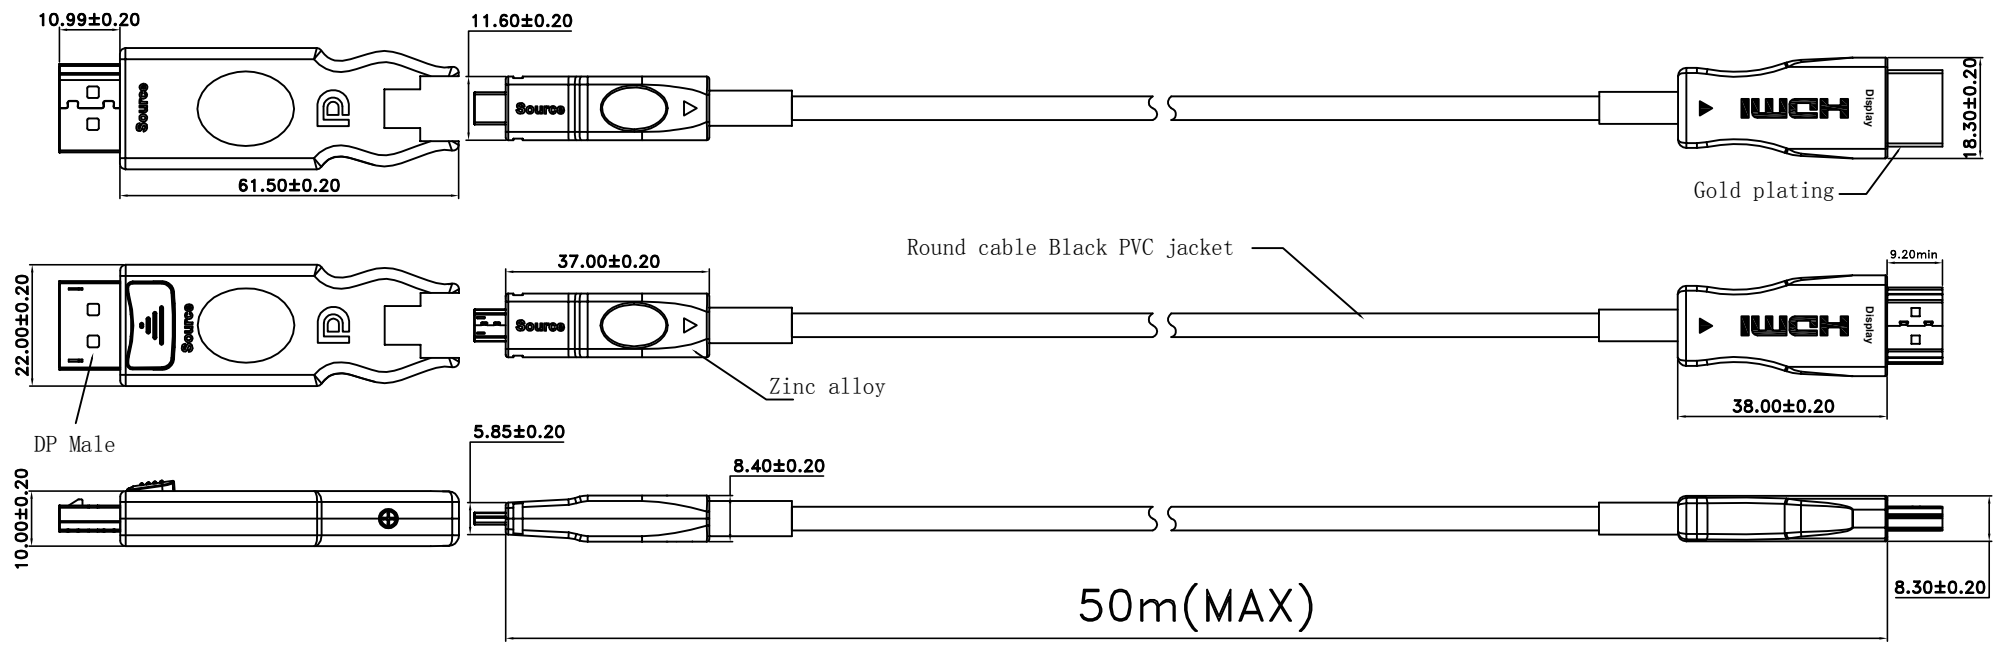

NOTE:

- Supports computer resolutions to 4K60Hz 4:4:4
- Plug and Play
- Support HDCP2.2
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel

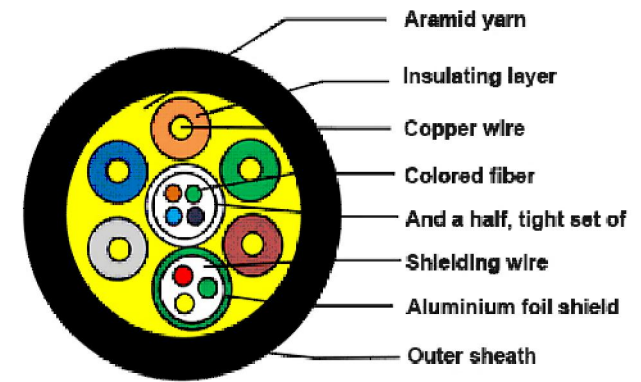


赤壁市高清光电科技有限公司
Chibi HD photoelectric technology co., Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCE				图号	日期	品名	HDMI 8K AM-DM-AM(AOC)				
ANG	TOL	DIM	TOL	制图	CLH	2022.01.19	产品编号	GQ-22-301			
.X	±3.0'	.X	±0.10	审核				单位	比例	页码	版本
.XX	±2.0'	.XX	±0.05	核准				mm	1:1	1/1	1
.XXX	±1.0'	.XXX	±0.03								

由 Autodesk 教育版产品制作


由 Autodesk 教育版产品制作

MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
⚠					

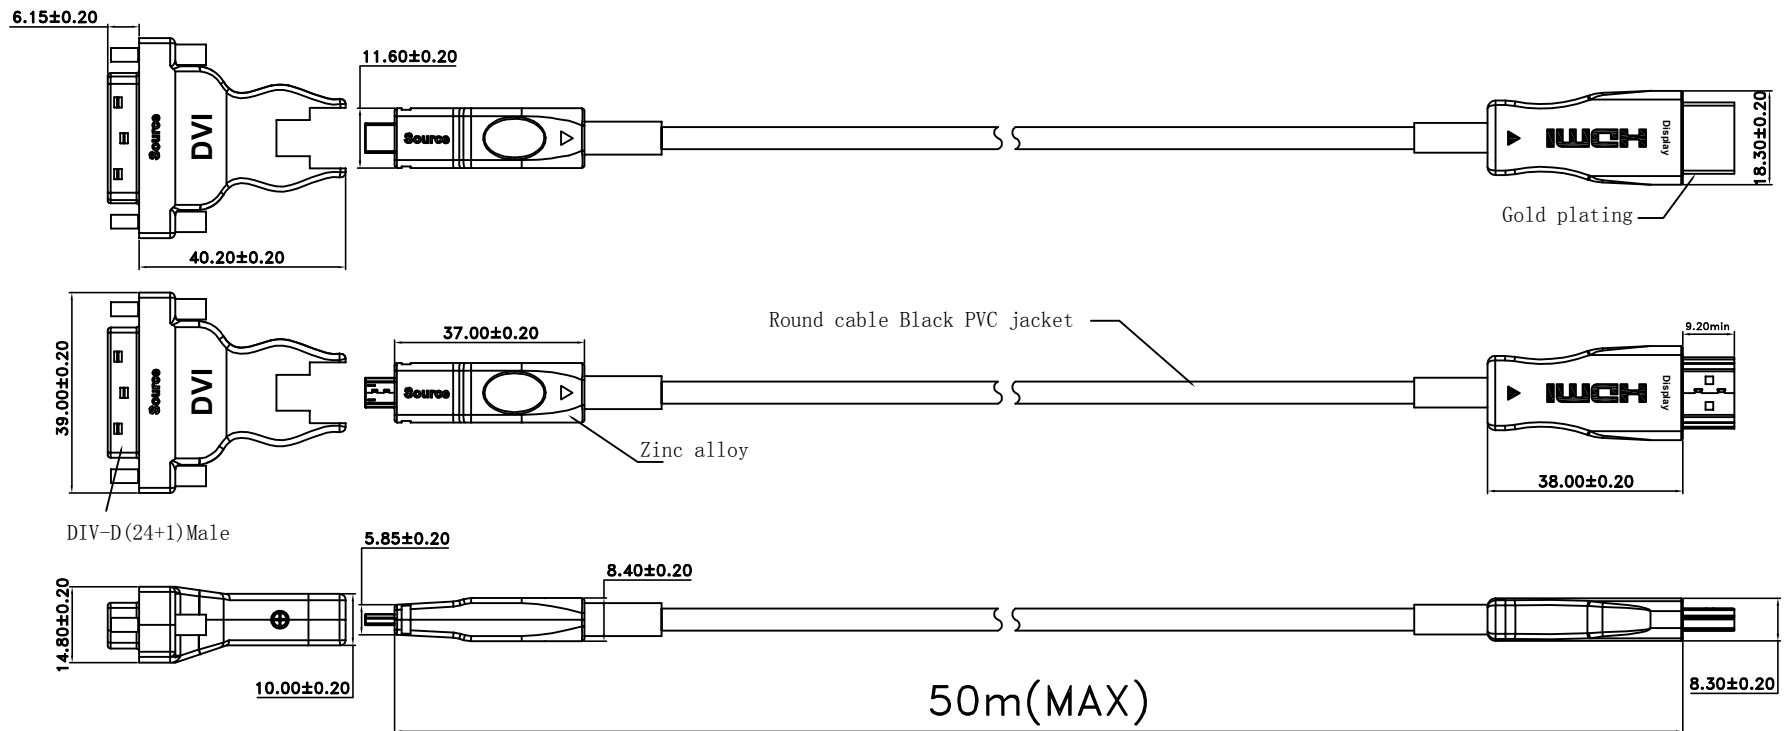

NOTE:

- Supports computer resolutions to 4K@30Hz 4:4:4
- Plug and Play
- Support HDCP2.2
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel

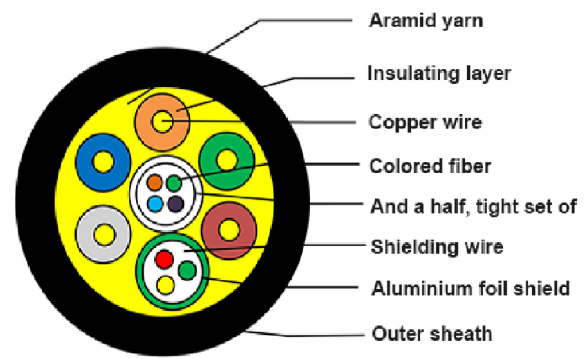

赤壁市高清光电科技有限公司 Chibi HD photoelectric technology co., Ltd			
图号	日期	品名	HDMI 8K AM-DM-AM(AOC)
制图	CLH	2022.01.19	产品编号 GQ-22-301
审核			
核准			
		单位	比例
		mm	1:1
		页码	版本
		1/1	1

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.10
.XX	±2.0°	.XX	±0.05
.XXX	±1.0°	.XXX	±0.03