
USER MANUAL


**HDMI V2.0 SWITCH 4x1
(Plastic)**

Enjoy the vivid world!

INTRODUCTION

4x1 HDMI Switch:

The 4x1 HDMI switch allows 4 HDMI ports to be switched to a single display terminal via remote control or buttons on unit. The switcher can be placed at the end of a long HDMI cable to regenerate the HDMI signal. The HDMI switcher can support all hd formats including 720p, 1080i, 1080p, 4K/30Hz, 4K/60Hz multichannel audio.

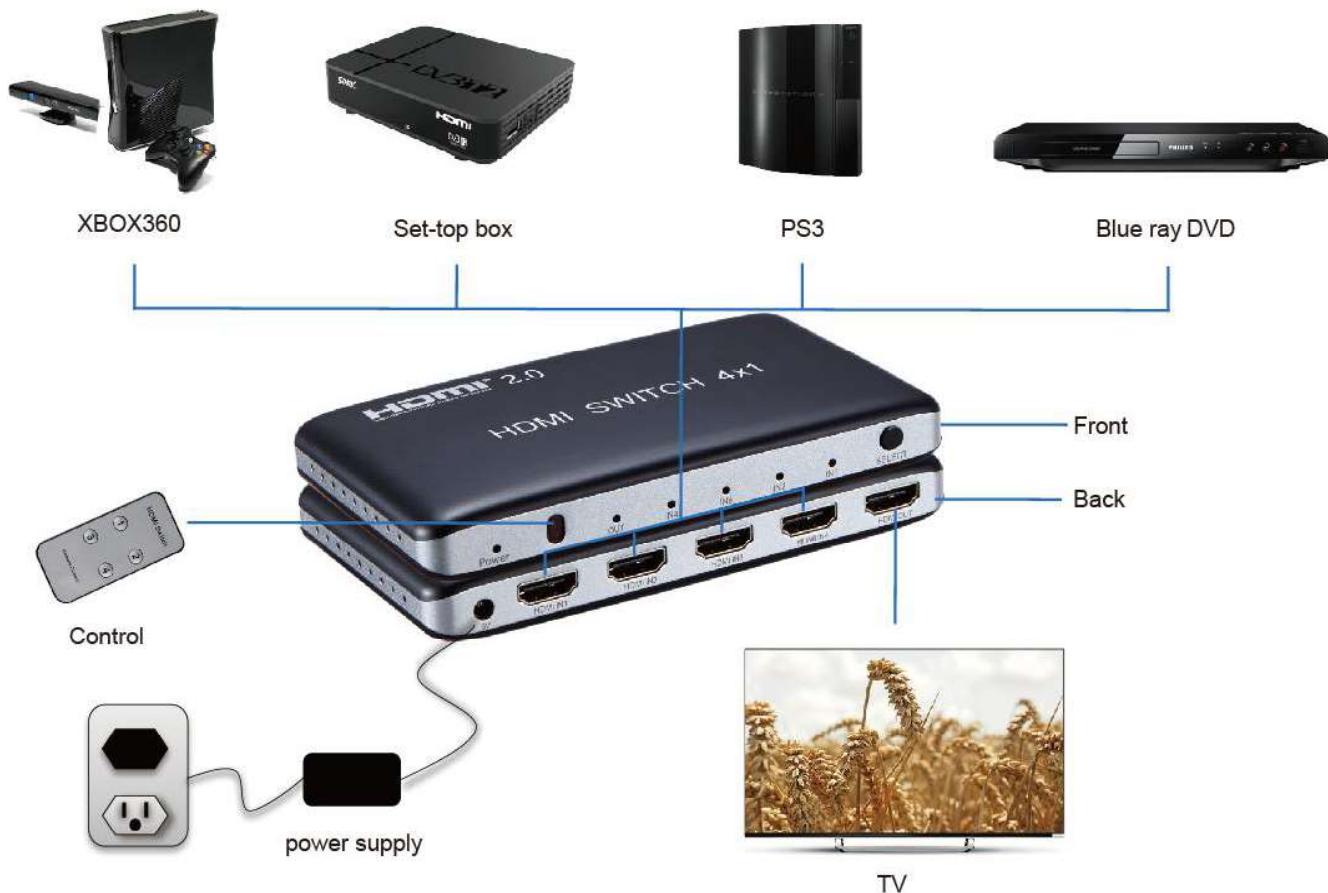

FEATURES

- Support HDMI 2.0b
- Support 3D
- Support highest video resolution 4K/60Hz

- Support 6Gbps data rate for tmds clock up to 600MHz
- Support 24/30/36 bit deep color
- Supports auto switch of HDMI input (priority of the last port in 4)
- Support standard AWG26 cable, input up to 8 metres ,output up to 8 metres (4K/30Hz or lower)
 - Support standard HDMI 2.0 cable, input up to 3 metres ,output up to 5 metres(4K/60Hz)
- Support single and high definition display for multiple sources, such as DVD Players and Satellite Receivers, HD players, PS4, Set top Boxes.
- Need DC5V/1A power supply.

Product Picture



SPECIFICATIONS:

| | |
|----------------------------|-----------|
| HDMI version..... | HDMI 2.0b |
| HDMI resolution | 4K/60Hz |
| Support video format | 3D |

| | |
|----------------------------------|---|
| Support video color format | 24/30/36 bit deep color |
| Support audio format..... | DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD |
| Max bandwidth..... | 600MHz |
| Max baud rate..... | 6Gbps |
| Input cable distance..... | ≤8m AWG26 HDMI standard cable(4K/30HZ); ≤3m 2.0 HDMI standard cable(4K/60HZ); |
| Output cable distance..... | ≤8m AWG26 HDMI standard cable(4K/30HZ); ≤5m 2.0 HDMI standard cable(4K/60HZ); |
| Max working current..... | 350mA |
| Power adapter format:..... | Input AC (50HZ, 60HZ) 100V-240V; Output: DC5V/1A |
| Operating Temperature range..... | (-10 to +55 °C) |
| Dimension (L x W x H)..... | 136x80x22 (mm) |
| Weight..... | 118g |

Physical Connection Showing Picture:

Operating and Connecting

- 1: Connect four cables from HDMI source device into HDMI switch input.
- 2: Connect one cable from HDMI source device into HDMI switch output.
- 3: Connect 5V/1A power adapter to the HDMI switch .

The Package includes:

1. HDMI Switch
2. IR Remote Control
3. 5V DC Power adapter

4. User Manual