



GE
Lighting

10059 - GE Cool White Starcoat® T5

F8T5/CW

Product Photo



GENERAL CHARACTERISTICS

Base Description	Miniature Bi-Pin
Base Type	Pin/Plug-In
Mercury Content	6 mg
Mercury-Picogram per mean lm hr	3750
Starting Temp (MIN) C-degrees	10 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	5000 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	G5
Bulb Shape	T5

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	320 lm
Nominal Initial Lumen per Watt	50
Initial Lumens-nominal	400 lm
Color Rendering Index-CRI	60
Color Temperature	4100 K

PRODUCT INFORMATION

Product Code	10059
Description	F8T5/CW
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168100595
Standard Package GTIN	10043168100592
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168100595
Alternative Unit Of Measure	EACH
Standard Package Quantity	24
Ean UPC	043168100595
Standard Package GTIN	00043168100595
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
Sales Unit	Each
UCC	043168100595

DIMENSIONS

Bulb Diameter (DIA) <Max>	0.63 in
Bulb Diameter (DIA) <Min>	0.53 in
Diameter	0.62 in
Face to End of Opposing Pin (B) <Max>	11.63 in
Face to End of Opposing Pin (B) <Min>	11.53 in
Nominal Length	12.0 in

ELECTRICAL CHARACTERISTICS

Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	140.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	8 W

CAUTIONS & WARNINGS



Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock

Turn power off before inspection
installation or removal.

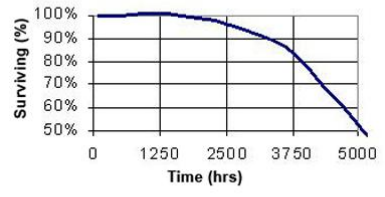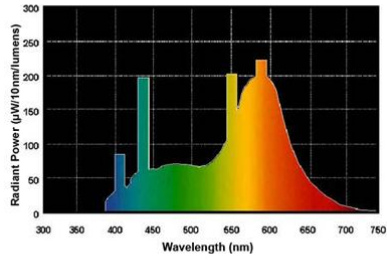

Jun 12, 2017 4:09:29 PM For additional information, visit www.gelighting.com