



GE  
Lighting

### 19902 - GE Compact HIR™ PAR30

#### 50PAR30/HIR/SP9

- ☞ Up to 42% more efficient than standard halogen
- ☞ Up to 27% energy savings
- ☞ Up to 60% longer life -4000 hours

#### Product Photo



#### CAUTIONS & WARNINGS

##### Caution

- Lamp may shatter and cause injury if broken
- Do not use lamp if outer glass is scratched or broken.

##### Warning

###### Risk of Burn

- Allow lamp to cool before handling.

###### Risk of Fire


- Keep combustible materials away from lamp.

###### Risk of Electric Shock

- Turn power off before inspection
- installation or removal.

Pressurized lamp--unexpected rupture may cause injury, fire, or property damage

- Do not use lamp if outer glass is scratched or broken.
- Do not use where directly exposed to water or outdoors without an enclosed fixture.

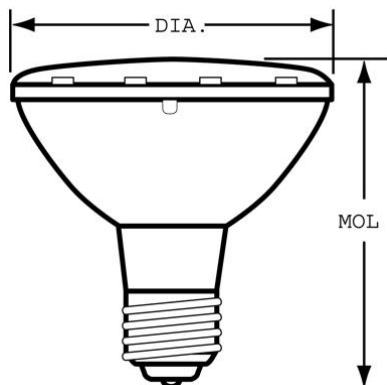

#### GENERAL CHARACTERISTICS

Base Description	Medium NP
Base Type	Pin/Plug-In
Filament	CC-8
Rated Life Hours-nominal	4000 h
Product Technology	Halogen
Bulb Shape	PAR30

#### PHOTOMETRIC CHARACTERISTICS

Beam Spread	9 deg
Center Beam Candle Pwr Candela	15000 cd
Nominal Initial Lumen per Watt	17
Initial Lumens-nominal	825 lm
Color Temperature	2810 K

#### PRODUCT INFORMATION

Product Code	19902
Description	50PAR30/HIR/SP9
Alternative Unit Of Measure	CASE

#### DIMENSIONS

Diameter	3.75 in
----------	---------

#### ELECTRICAL CHARACTERISTICS

Input Voltage [nom]	120 V
Rated power (Watts)	50 W

