



# Actinic BL TL-D(K) Secura

## ACTINIC BL15W/10 SECURA 25PK

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

### Product data

General Information		Voltage (Nom)	
Base	G13 [ Medium Bi-Pin Fluorescent]		51 V
Main Application	Reprography (R)	Approval and Application	
Life to 50% Failures (Nom)	11000 h	Mercury (Hg) Content (Nom)	5.5 mg
Useful Life (Nom)	9000 h	UV	
Light Technical		UV-B/UV-A (IEC)	0.2 %
Color Code	10	UV-A Radiation 100Hr (IEC)	3.15 W
Color Designation	Actinic	Product Data	
Chromaticity Coordinate X (Nom)	222	Order product name	Actinic BL TL-D TL-D 15W/10 Secura 1SL/25
Chromaticity Coordinate Y (Nom)	210	EAN/UPC - Product	8711500898586
UV Depreciation at 2000 h	25 %	Order code	215186
UV Depreciation at 5000 h	40 %	Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	25
Power (Rated) (Nom)	15 W	Material Nr. (12NC)	928024701029
Lamp Current (Nom)	0.335 A	Net Weight (Piece)	61.000 g

# Actinic BL TL-D(K) Secura



## Warnings and Safety

## Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D TL-D 15W/10 Secura 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

### TL-D 15W/10 SECU

## Photometric data

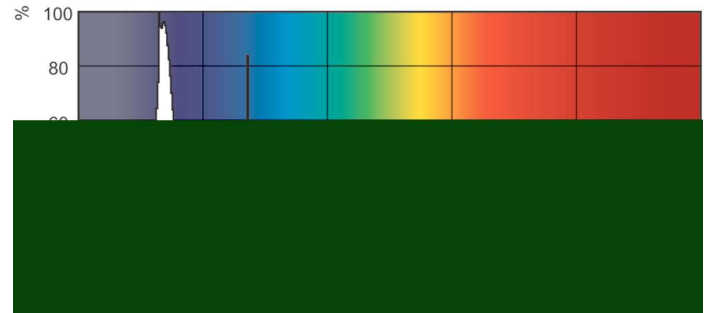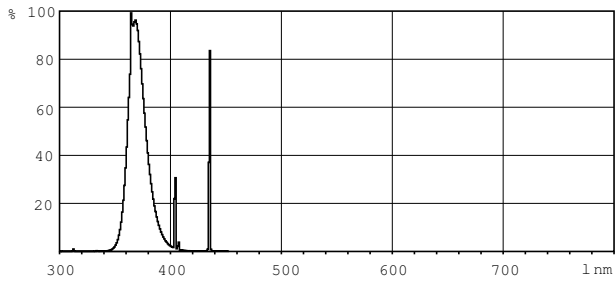

### XDPB\_XUBTLD\_10-Spectral power distribution B/W

