

PHILIPS

Lighting



MSR

MSR 575/2 10H 1CT/4

The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Product data

General Information	
Cap-Base	GX9.5 [GX9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Studio/Disco
Life to 50% Failures (Nom)	1000 h
System Description	Cold Strike
Light Technical	
Color Code	2
Luminous Flux (Min)	42750 lm
Luminous Flux (Nom)	47500 lm
Chromaticity Coordinate X (Nom)	302
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	6990 K
Luminous Efficacy (Rated) (Min)	75 lm/W
Luminous Efficacy (rated) (Nom)	83 lm/W
Color Rendering Index (Nom)	70
Operating and Electrical	
Power (Rated) (Nom)	575 W

Lamp Current (Nom)	6.75 A
Ignition Supply Voltage (Min)	207 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	20 mm
Luminaire Design Requirements	
Bulb Temperature (Max)	700 °C
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	871829122127200
Order product name	MSR 575/2 10H 1CT/4
EAN/UPC - Product	8718291221272
Order code	928171605115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4


MSR

Material Nr. (12NC)	928171605115
Net Weight (Piece)	0.057 kg

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 575/2	30 mm	7.0	64 mm	66 mm	65	125 mm	36 mm	35	34 mm
10H 1CT/4		mm			mm			mm	

MSR 575/2 10H

Photometric data

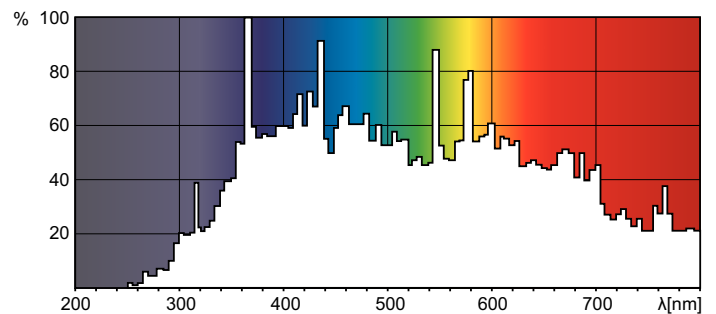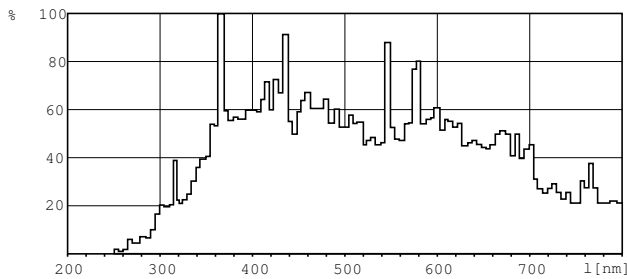

MSR Cold Strike

MSR Cold Strike

