



MSR Hot Restrike

MSR 575 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data

General Information	
Cap-Base	G22 [G22]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Studio/Theatre
Life to 50% Failures (Nom)	1000 h
System Description	Hot Restrike

Light Technical	
Color Code	- [Not Specified]
Luminous Flux (Min)	43200 lm
Luminous Flux (Nom)	48000 lm
Chromaticity Coordinate X (Nom)	323
Chromaticity Coordinate Y (Nom)	328
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (Rated) (Min)	75 lm/W
Luminous Efficacy (rated) (Nom)	83 lm/W
Color Rendering Index (Nom)	90

Operating and Electrical	
Power (Rated) (Nom)	575 W
Lamp Current (Nom)	6.75 A

Ignition Supply Voltage (Min)	207 V
-------------------------------	-------

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Cap-Base Information	-

Luminaire Design Requirements	
Bulb Temperature (Max)	700 °C
Pinch Temperature (Max)	350 °C


Product Data	
Full product code	871829122105000
Order product name	MSR 575 HR 1CT/4
EAN/UPC - Product	8718291221050
Order code	928097705115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928097705115
Net Weight (Piece)	0.100 kg

MSR Hot Restrike

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 575	30 mm	7.0	69 mm	71 mm	70	145 mm	43 mm	42	41 mm
HR 1CT/4		mm			mm			mm	

MSR 575 HR

Photometric data

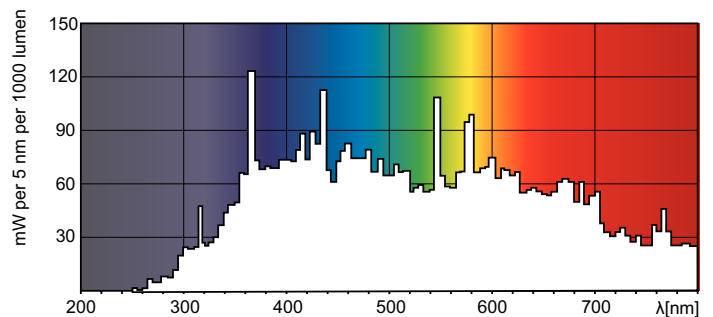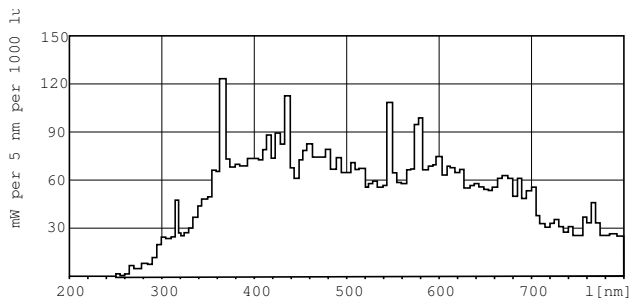

MSR 125, 200, 250, 400, 575, 1200 (C), 2500, 4000, 6000, 12000, 18000 HR

MSR Hot Restrike

