


JCR

- Only for Use in Approved Enclosed Halogen Fixtures
- Focused Beam for Optical Applications
- 2-Pin Base - GX5.3
- 42mm Dichroic Coated Reflector
- Operate Base Down to Horizontal

Watts	Ushio	Ushio	Dimensions	Reflector	Filament	Working	Center Screen	Color	Avg	Burn
	Ordering	Lamp	MOL							
	Code	Description	mm			mm	lx	K	h	
2-Pin Base – GX5.3 MR-13 Reflector										
250	1000423	EXY, JCR82V-250W	44.5	Faceted	CC-8	152.4	610	3250	250	BD/Hor
300	1000414	EXR, JCR82V-300W	44.5	Faceted	CC-8	152.4	1100	3350	35	BD/Hor
300	1000421	EXW, JCR82V-300W	44.5	Faceted	CC-8	152.4	1200	3400	15	BD/Hor
300	1000535	FHS, JCR82V-300W	44.5	Faceted	CC-8	152.4	1000	3300	70	BD/Hor

Center Screen Illuminance - Approximate value for reference only

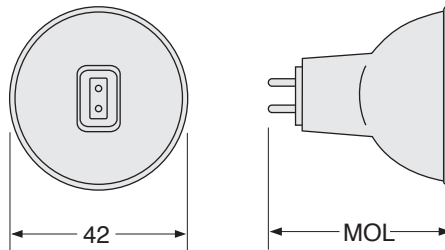

GX5.3