


## Hyper-X High-Power LED Driver

The Custom LED Hyper-X LED Driver is designed to power the Custom LED Hyper-X LED Modules with dual-intensity, and current regulation. One or more Hyper-X LED modules can be connected to a single driver as shown in the diagrams below. The LED modules are NOT water or weather resistant and must be protected by a suitable enclosure. Mounting is achieved by a temperature resistant adhesive, or by screws centered on the two notches in the module (do not let the screw head contact wires or solder-pads on modules). Note: The Driver may become very hot in prolonged bright operation with fewer than two LEDs driven.

---


### Hyper-X LED Typical Installation Diagram

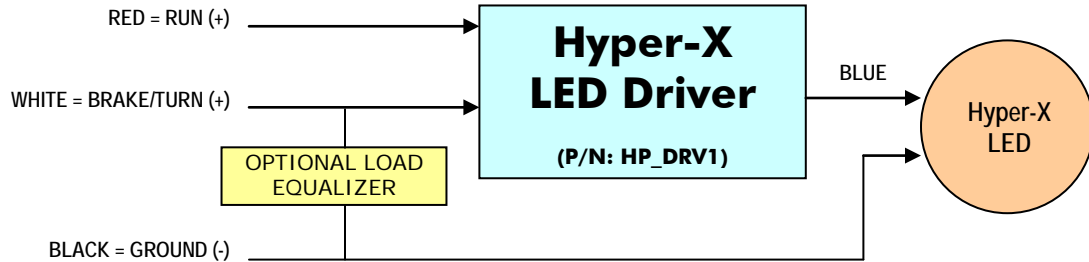

---

### Hyper-X LED Multiple LED Installation Diagram

**NOTE:** UP TO 3 YELLOW OR 3 RED OR 2 WHITE OR 2 BLUE LED MODULES CAN BE RUN OFF OF A SINGLE DRIVER

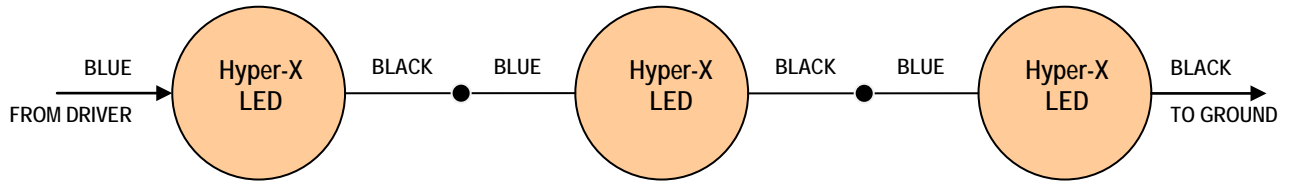

© Custom LED LLC. All Rights Reserved.