lambert&fils

BEAUBIEN 09



Type Suspension

Materials Body: powder coated aluminium or brass

Hardware: brass

Sphere: milk glass (G50-G80)
Canopy: powder coated steel or brass

Total Height Height to be specified upon order

Weight 12lb / 5.4kg

Light Bulb LED (included), 8 x 3.5W

Sockets G9

Voltage 120V / 240V

Dimmer Refer to our recommended list of dimmer models


Certifications • ⊕ C € ⊕


Notes • Must be installed by an electrician


Additional charges for modifications

· Lead time between 7-9 weeks

Dimensions are approximate and may vary slightly

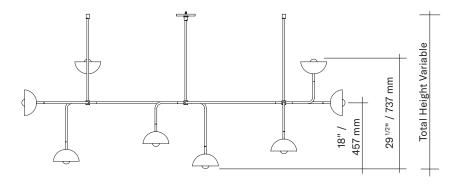




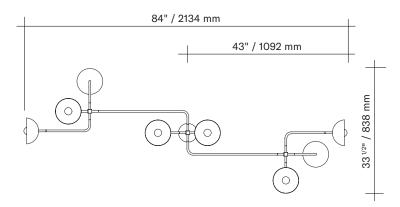

Updated: December 2018

lambert&fils

ORDER GUIDE: SKU

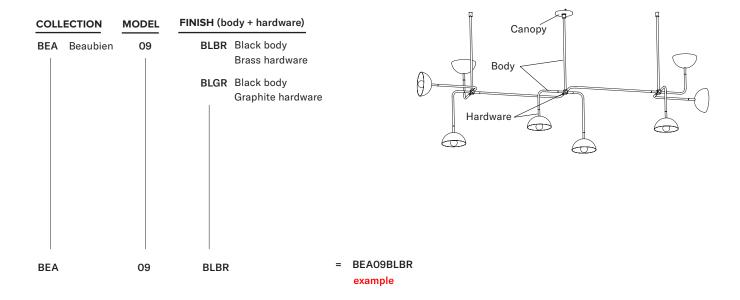

Finish







iss Flat bla

CANOPY

Swivel option for slanted ceiling



lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS SPHERES Frosted Frosted G80 Ø ±3" / 80 mm 4.5W 3.5W 100V-120V / 240V 100V-120V / 240V 450 Lumens 350 Lumens G50 Ø ±2" / 50 mm 2700 K 2700 K 25 000 H 25 000 H CRI ≥80 CRI ≥80 2 years warranty 2 years warranty ⊕. C €

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.