lambert&fils

LAURENT 05



type suspension

handblown opaline glass sphere: materials

frame: polished brass (BR) or

powder coated aluminum (Colors)

or nickel plated steel (CH)

hardware: polished brass

or powder coated aluminium

wire: nylon/polyester

weight 9 lb / 4 kg

light bulb LED (included), 4,5W

(see lightbulb section for specifications)

sockets

120V / 240V voltage

dimmer refer to our recommended list of dimmer models

certifications <u>®</u> (€⊕

notes - must be installed by an electrician


- additional charges for modifications or for special

orders


- lead time between 7-9 weeks.

- dimensions are approximate and may vary slightly.


parallel wires

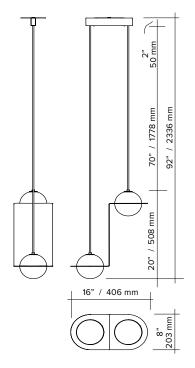

parallel wires with offset connection




angled wires




lambert&fils

ORDER GUIDE: SKU

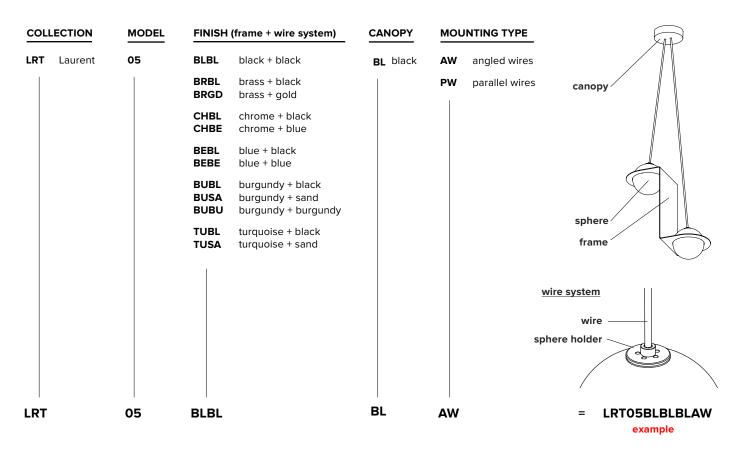

FRAME FINISH




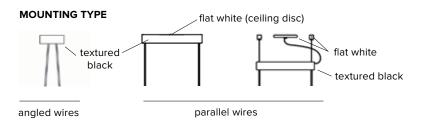


lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty





DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.