



Image shown above 118.11 with round canopy

± Ø140 - 160mm

Series 118

**Mounting** Ceiling mounted

Glass Colours White

**Lamp** 1.5W LED, 2500K, 130Im

Coaxial Length 3000mm standard / up to 30500mm maximum

Adustable length: 118.1 - 118.9 Non-adjustable length: 118.11 - 118.28

Canopy Finishes 118.1 - 118.7: white, black or brushed nickel canopy

118.1mi/mo: white polyurethane canopy

118.9 - 118.28: white canopy

Materials Blown glass, braided metal coaxial cable, electrical

components, steel canopy

Power Supply Integral

Remote mounted for 118.1m/mo/mi

Bocci recommends remote mounting power supplies for ease

of long-term maintenance.

**Environment** Indoor, dry location. IP30

**Note** Every single Bocci product is handmade. Each one is variously

blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are

 $individual, irregular\ expressions\ of\ our\ research.$ 

Patent # Worldwide patents pending.

Certifications



## Weight (kg)



#### Round

118.1	3.3
118.3	9.7
118.5	16.1
118.7	22.4
118.11	42.7
118 20	76.5



#### Square

118.11	42.7
118.16	62.5
118.28	102




### Rectangle


118.9	33.7
118.11	42.7
118.16	62.5
118.20	76.5
118.28	102

# }0((1

#### **ADJUSTABLE LENGTH NON-ADJUSTABLE LENGTH**

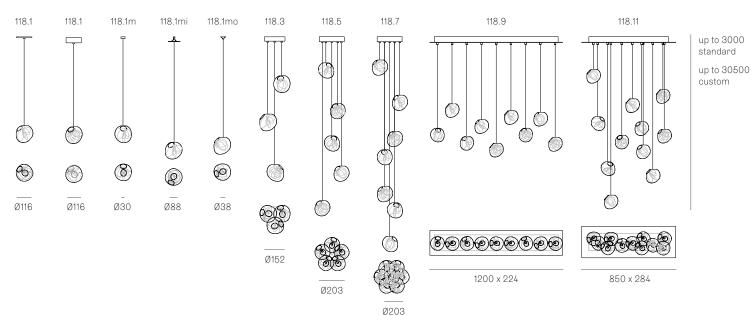

# **NON-ADJUSTABLE LENGTH**

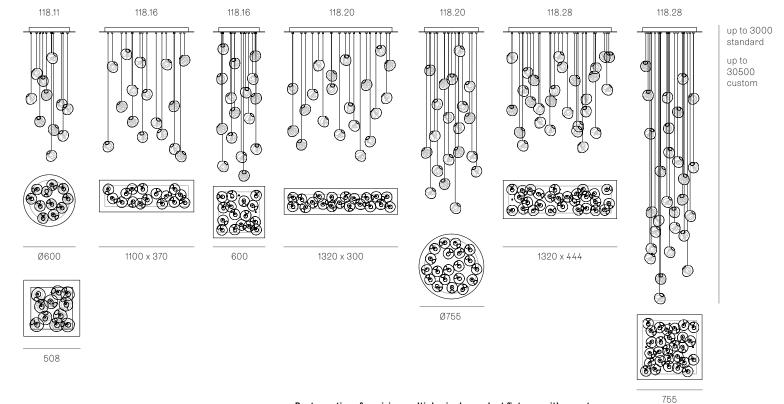

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.

All dimensions are in millimeters (mm) unless otherwise specified.

Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.