





2D Barcode Scanner



Product Feature

- New decoding chip, interpretation of various 1D & 2D barcode
- Professional technology, can scan WeChat/alipay bar code
- Plug and play, simple setup, fast use
- Power indicator on the bottom
- Wire life more durable

Product Size

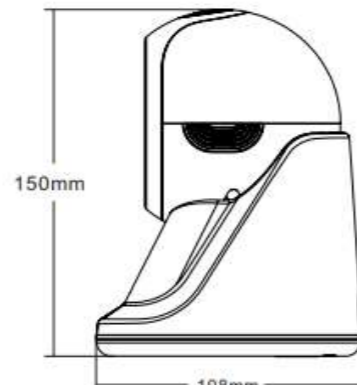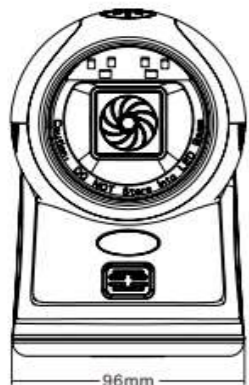

2D Barcode Scanner

Specification

Performance Parameters

Ligth Source:	Red LED
Supported Symbologies:	1D: Codabar, Code 11, Code 39, Code 93, Code 128/EAN128, EAN.UCC Composite, Interleaved 2 of 5, MSI Code, Planet, Plessey Code, Postnet, RSS, Standard 2 of 5, Telepen, UPC/EAN, etc. 2D: PDF417, QR Code, Matrix 2 of 5, Mrico PDF417, Australian Post, Canada Post, Japan Code, Maxi Cdoe, Codeblock, Aztec, Dutch Post, TLC 39, DataMatrix, etc.
System compatibility:	Linux, Android, Windows XP/7/8/10
Scan Range:	10-160mm(EAN 13 13mil, PCS=90%)
Print Contrast:	20% minimum reflective difference
Minimum recognition accuracy:	Code 39 4mil
Motion Tolerance:	4meters/second
Scan Mode:	Automatic Induction Scanning
Image (Pixels):	1280 pixels(H) x 800 pixels(V)
Man-machine Interaction:	Indicator light: Blue light power indicator; Blue light flashing code reading prompt, Buzzer: start prompt, read code prompt.
Recognition angle range:	Turn $\pm 360^\circ$, Elevation $\pm 65^\circ$, Declination $\pm 65^\circ$
Interface:	USB(Drive-Free), RS232, USB-COM

Physical Parameters

Dimensions:	96mm*108mm*150mm
Weight:	294.4g
Material:	ABS+PC
Cable Length:	2M

Electronic Parameters

Working Voltage:	DC5V $\pm 5\%$
Current:	Standby Current 190mA; Working Current 240mA

Environmental Parameters

Operating Temperature:	0°C~50°C
Storage Temperature:	-40°C~70°C
Relative Humidity:	0%~95% RH (non-condensing/non-freezing)
Shock Resistance:	Withstands multiple times 1.5 meters drops to concrete

Application

