







## ★ XB-6266MBT

### Product Feature

- Can interpret a variety of 1D & 2D code, direct transmission of Chinese 2D code
- Directly paired use with mobile phone/tablet computer/laptop with bluetooth function
- Empty transmission distance of 100 meter via wireless bluetooth
- Stores about 512000 characters
- Touch charging base

### Product Size

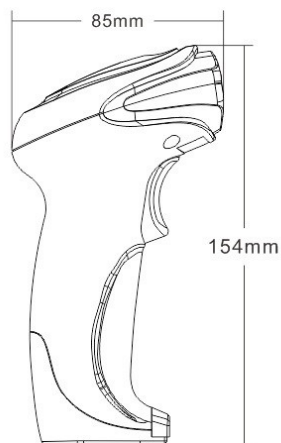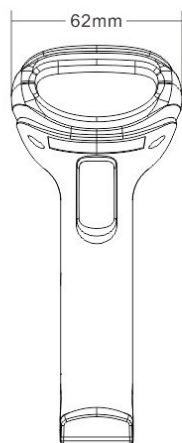

## Specification

### Performance Parameters

Light Sources:	617nm LED Aimer, White LED
Supported Symbologies:	<b>1D:</b> EAN, UPC, Code 39, Code 93, Code 128, UCC/EAN 128, Codabar, Interleave 2 of 5, ITF-6, ITF-14, ISBN, ISSN, MSI-Plessey, GS1 Databar, GS1 Composite Code, Industrial 25, Standard 25, Plessey, Matrix 2 of 5, <b>2D:</b> QR Code, Data Matrix, PDF417, Micor PDF417, Aztec, Maxicode, Micor QR, Hanxin.
Scan Type:	Image CMOS
Scan Mode:	Manual/Continuous/Automatic Scintillation
Scan Angle:	Yaw65°, Rotation 30°, Pitch60°
Precision:	≥ 5mil
Depth of scan field:	EAN13 50-200mm(13mil); QR 25-240mm(20mil); PDF417 30-130mm(6.67mil)
Error Rate:	1/5million
Interface:	USB-HID, USB-COM
Communication mode:	Paired dedicated receiver: 2.4g communication; Paired mobile bluetooth devices: bluetooth BLE4.0
Transmission distance:	≤ 100M(Open Yard)
Storage Mode:	Offline Storage Mode: When the scanner exits the connection range, the data is automatically stored. Storage capacity is 512000 characters. Inventory storage mode: Scanner can enter inventory mode, storage capacity is 512000 characters.
Pairing Mode:	One to One: One Scanning Gun Pairs One Receiver, One scanner paired with a Bluetooth mobile device.
Receiving End:	Dedicated Bluetooth receiving base, Android, IOS Mobile devices.

### Environmental Parameters

Operating Temperature:	-20°C~50°C
Storage Temperature:	-40°C~70°C
Relative Humidity:	0%~95% (Non-condensing)
Drop/Shock Resistance:	Withstands multiple times 1.5 meters drops to concrete

### Physical Parameters

Dimensions:	85mm*62mm*154mm
Weight:	317.9g
Cable Length:	1.2M
Material:	ABS+PC

### Electrical Parameters

Voltage:	DC5V±5%	Battery Working Time:	7h
Operating Current:	280mA	Lithium battery:	2200mA
Standby Current:	0mA(Standby is to cut off battery power)	Charging Time:	5h
Charging Mode:	Contact the charging		

## Application

