




UP-620i

Product Feature

- New decoding chip for interpreting various 1D codes
- Scan 1D wrinkle, scratch bar code
- Support various barcodes such as WeChat and Alipay
- Withstand multiple 3 meters drops to concrete
- Plug and play, easy to set up and quickly match

Product Size

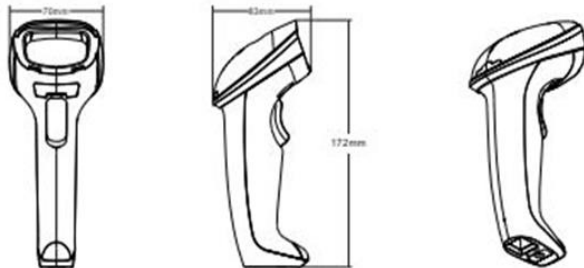

Specification

Performance Parameters

Supported Symbolologies: UPC- A, UPC-E, EAN-13, EAN-8, Codabar, Code 39, Code 39 Full ASCII, China Post, Plessey, MSI, Code 93, Code 128, Industrial 2 of 5, Interleave 2 of 5, Code 11, ISBN, SSN, Code 32(Italian pharm code), Code 39 extended, GS1-128 and ITF-14, SISAS, GS1 Omnidirectional, GS1 Limited, Aviation25, RSS 14.

principle of scanning: 1500 Point pixel ccd Image Sensor

Scan Speed: ≥200 times/s

Scan Mode: Manual/Continuous/Automatic Scintillation Scanning

Precision: 4mil

Depth of scan field: 20-280mm(0.33mm,PCS90%)

Error Rate: 1/5million

Interface : USB-HID, RS232

Physical Parameters

Dimensions: 83mm*70mm*172mm

Weight: 112.4g

Material: ABS+PC

Cable Length: 2M

Environmental Parameters

Operating Temperature: -20°C~50°C

Storage Temperature: -40°C~70°C

Relative Humidity: 5% ~95% RH(Non-condensing)

Shock Resistance: Withstands multiple times 1.5 meters drops to concrete

Electronic Parameters

Working Voltage: DC5V±1%

Operating Current: Standby current 3uA; Working current 120mA.

Application

