

**Application:**


The iWalldock Simplidock™ is an in-wall tablet mounting system designed for easy docking and removal of the tablet. Flush installation is recommended with wall material thicknesses ranging from 1/8" (3mm) to 1" (25mm). Placement over structural members (studs) is possible with wall thickness greater than mounting depth F (shown below). Installation requires (2) provided clamps when installing in hollow wall cavities or directly to structural members, or a combination of both depending on installation requirements. Open area shown behind charger should remain clear of obstructions to allow proper installation. Hole cutout dimensions are shown in the table below (B x D)

**Environment:**

Recommended for indoor use only. Operating temperature: 65°F to 85°F (18°C to 29°C)

**Material:**

Machined Acrylic Plastic - Paintable (Outer Bezel only)

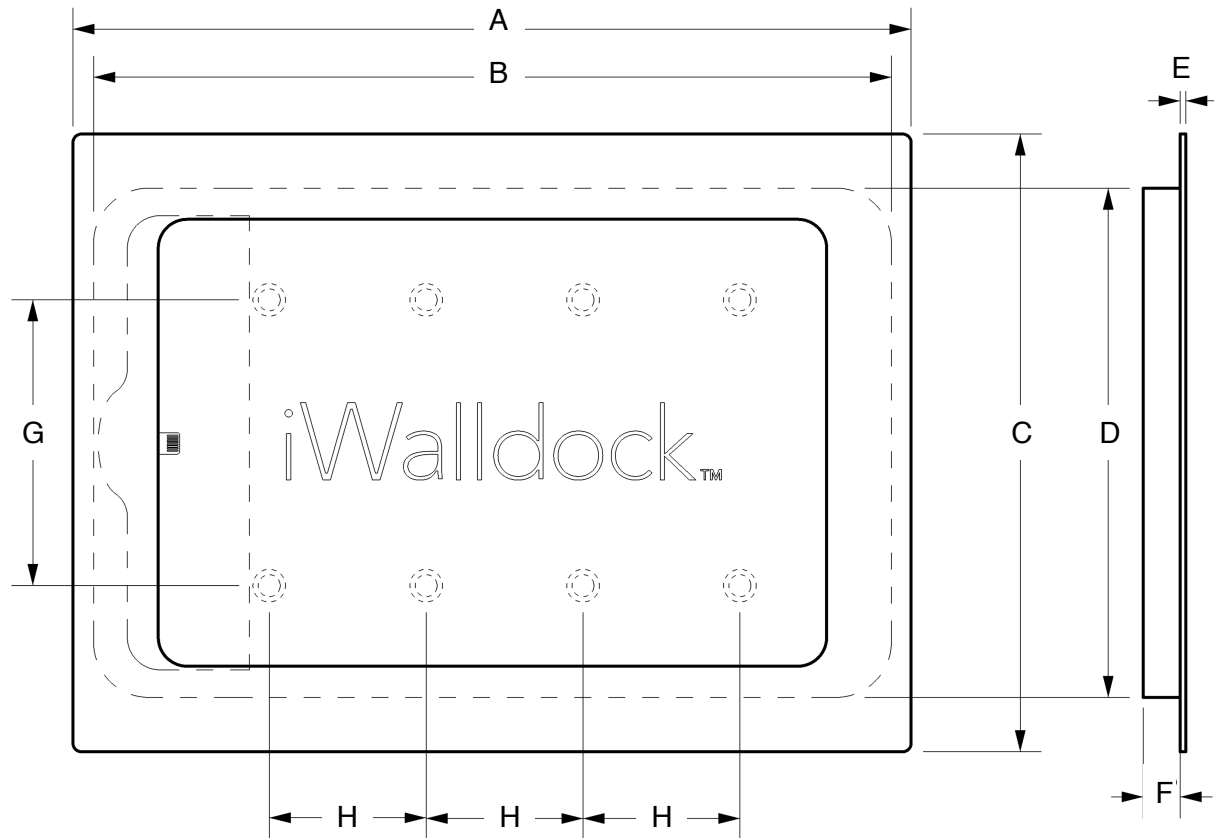

iPad Version	SKU	A	B	C	D	E	F	G	H
iPad Mini 1 2 3	IWS-M-X*	9.75" 247.6 mm	9.28" 235.7 mm	7.18" 182.6 mm	5.92" 150.5 mm	0.07" 1.7 mm	0.43" 11.1 mm	3.32" 84.5 mm	1.82" 46.3 mm
iPad Mini 4	IWS-M4-X*	9.87" 250.8 mm	9.28" 235.7 mm	7.18" 182.6 mm	5.92" 150.5 mm	0.07" 1.7 mm	0.43" 11.1 mm	3.32" 84.5 mm	1.82" 46.3 mm
iPad 9.7" 5th/Air	IWS-A-X*	11.39" 289.3 mm	10.89" 276.6 mm	8.38" 212.8 mm	7.33" 186.1 mm	0.07" 1.7 mm	0.43" 11.1 mm	3.32" 84.5 mm	1.82" 46.3 mm
iPad Air 2/Pro 9.7	IWS-A2-X*	11.39" 289.3 mm	10.89" 276.6 mm	8.38" 212.8 mm	7.33" 186.1 mm	0.07" 1.7 mm	0.43" 11.1 mm	3.32" 84.5 mm	1.82" 46.3 mm
iPad Pro 10.5	IWS-P10-X*	11.67" 296.5 mm	11.18" 283.9 mm	8.38" 212.8 mm	7.33" 186.1 mm	0.07" 1.7 mm	0.43" 11.1 mm	3.32" 84.5 mm	1.97" 50.1 mm
iPad Pro 12.9	IWS-P-X*	13.83" 351.4 mm	13.42" 340.9 mm	10.36" 263.1 mm	9.31" 236.4 mm	0.07" 1.7 mm	0.43" 11.1 mm	5.0" 127.0 mm	2.68" 68 mm

\*X Denotes Color Code: GW (Gloss White), GB (Gloss Black), MW (Matte White), MB (Matte Black), GR (Gray), AL (Aluminum), SS (Stainless Steel), CF (Carbon Fiber), BL (Black Leather)