


## Applications


Industrial Machinery  
Robotics  
Commercial Wiring  
Low Voltage Control System  
Solar Industry

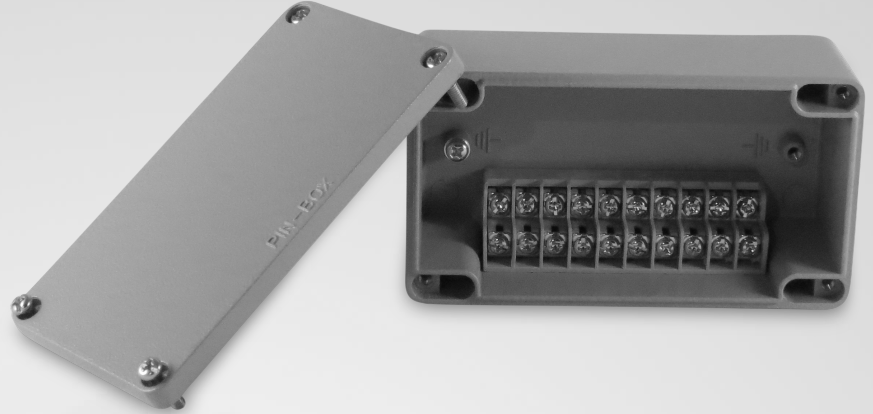

## Specifications


### Mechanical

Length: 2.755 in (70 mm)  
Width: 5.039 in (128 mm)  
Height: 2.047 in (52 mm)  
Weight: 0.88 lb (399 g)  
Material: Cast Aluminum  
Base & Cover  
Connection Capacity:  
14 - 20 AWG(0.5 - 2.5mm<sup>2</sup>)  
Neoprene Gasket In Cover

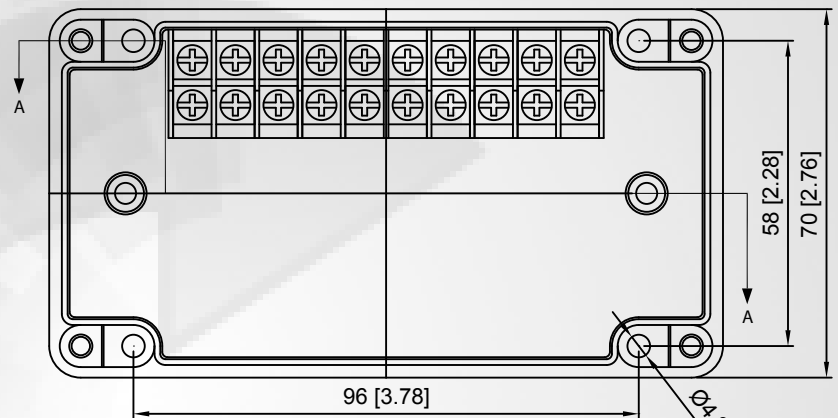

### Electrical

Input Current: 15 Amperes  
Rated Frequency: 60 Hz  
Rated Input Voltage: 120 Volts  
#6 Screw Terminal  
Terminations: 20 / Circuits: 10

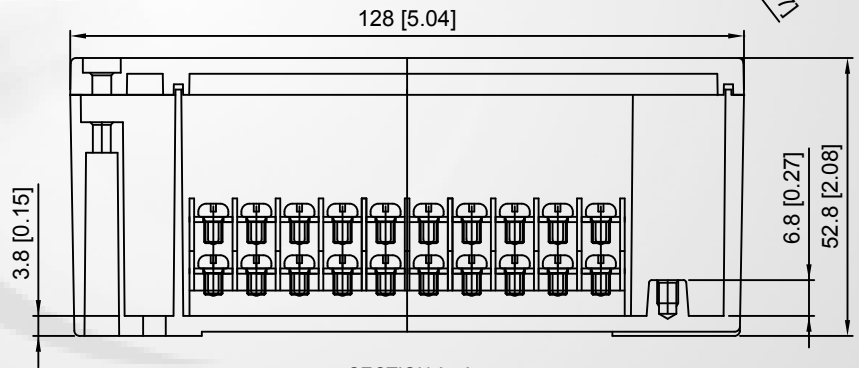

SECTION A - A  
SHOWN WITH COVER

### Safety

Certifying Agency: TUV-SUD  
Countries: Canada, USA  
Standards: UL 508A  
Ingress protection: IP67

## Compatible Accessory



SG-BB-10 (Red)