


Applications

Industrial Machinery
Robotics
Commercial Wiring
Low Voltage Control System
Solar Industry

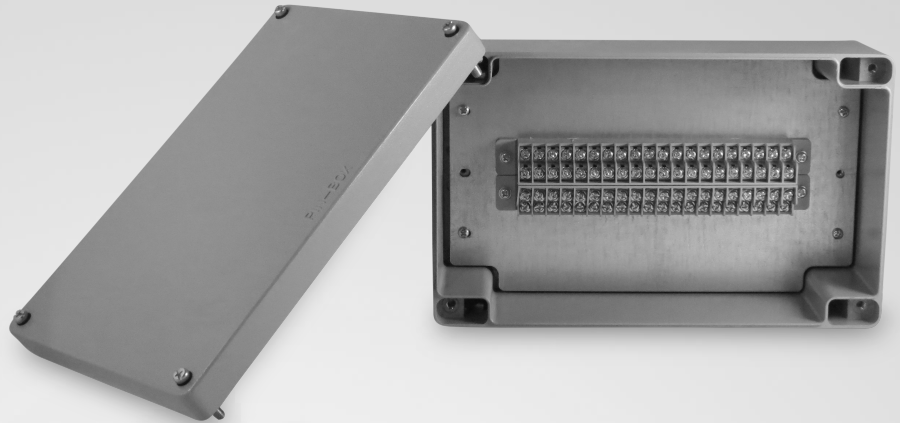

Specifications

Mechanical



Length: 6.299 in (160 mm)
Width: 10.236 in (260 mm)
Height: 3.543 in (90 mm)
Weight: 5.51 lbs (2500 g)
Material: Cast Aluminum
Base & Cover
Connection Capacity:
14 - 20 AWG(0.5 - 2.5mm²)
Neoprene Gasket In Cover

Electrical

Input Current: 15 Ampers
Rated Frequency: 60 Hz
Rated Input Voltage: 120 Volts
#6 Screw Terminal
Terminations: 80 / Circuits: 40

Safety

Certifying Agency: TUV-SUD
Countries: Canada, USA
Standards: UL 508A
Ingress protection: IP67

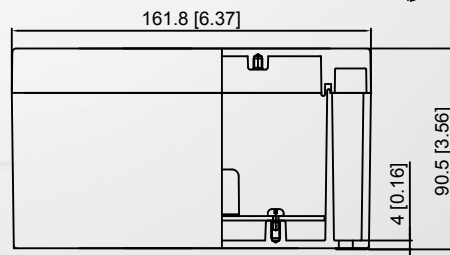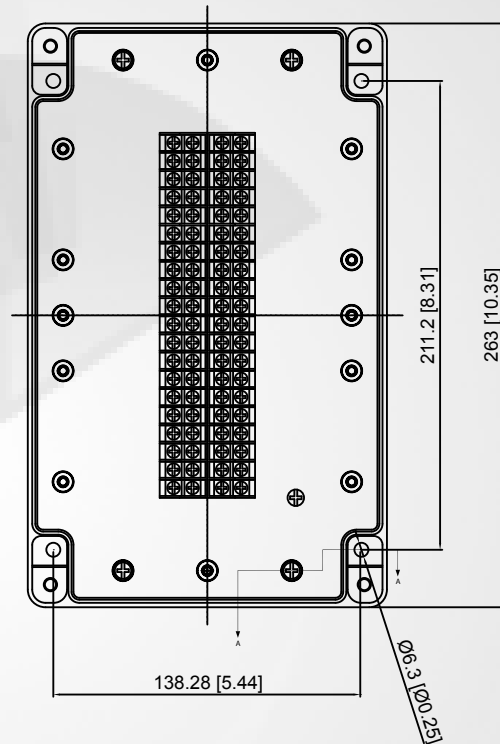

SECTION A - A
SHOWN WITH COVER

Compatible Accessory



SG-BB-10 (Red)