





Wall Cabinet ASSEMBLY INSTRUCTIONS

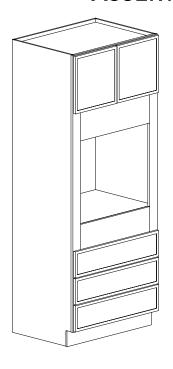

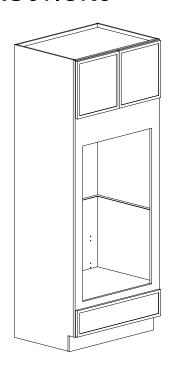

These assembly instructions are only applicable for all Single/Double Ovenl Cabinets OC3396SD



ATTENTION: For questions or concerns about your cabinets, assembly or installation, please contact our dedicated Customer Care Team at 1-800-CABINET (222-4638). Our Customer Care associates are here for you every step of the way.





► General Instructions:

Thank you for purchasing a Cabinets To Go product. You are now the proud owner of a high quality product designed to face the test of daily use and guaranteeing your enjoyment for many years to come.

Carefully read the instructions before starting the installation.

During assembly, please follow all generally accepted safety procedures.

Failure to adhere to the following instructions will invalidate the warranty and Cabinets To Go will decline any responsibility

Before the assembly begins, check that all appropriate and required plumbing and electrical connections exist.


Before drilling, make absolutely sure that there are no pipes (gas, water, electricity, heating, etc.) at the drilling location. Cabinets To Go will not be held responsible for failure to follow thể instructions.


PRIOR TO ASSEMBLY, PLEASE MAKE SURE YOU HAVE ONE FACE FRAME BOX AND ONE CARCASS BOX, WHICH HAVE ALL THE PART IN THE QUANTITIES MENTIONED BELOW. IF YOU ARE MISSING ANY PARTS, PLEASE STOP AND CONTACT CUSTOMER CARE IMMEDIATELY AT 1-800-CABINET.

► Items Quantity


Item.	Description	Q'ty
A	SIDE PANEL	2
В	BACK PANEL	1
С	TOP - BOTTOM PANEL	2
D	CENTER PANEL	2
E	TOE KICK	1
F	FRAME	1
G	DOOR	3
Н	DRAWER FRONT	2
I	DRAWER BOX FRONT	3
K	DRAWER BOX BACK	3
L	DRAWER BOX SIDE	6
N	DRAWER BOX BOTTOM	3
M	SHELF	1

► Required tools:





Hardware Box			
No.	Description	Q'ty	Picture
a	HINGE OVERLAY: 1-1/4"	4	
b	0.47" FLAT HEAD SCREW	8	(S)mmo
с	0.75" FLAT HEAD SCREW	10	Dammun-
d	21" SELFCLOSE SLIDE	3	
e	1" FLAT HEAD SCREW	34	Dammann-
f	0.56" FLAT HEAD SCREW	12	()222P
g	REAR CLIPS	6	
h	Locking Device	6	
i	0.39" FLAT HEAD SCREW	6	Dame-
k	0.6" FLAT HEAD SCREW	12	0 mm-
1	PLASTIC SHELF SUPPORT	4	

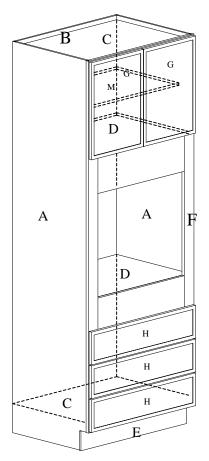


The material above are for the largest unit in this instruction set. Smaller units may require less hardware and material: Therefor, your item may contain a smaller number of each.




NOTE:

If installing a double oven, you will want to perform this step first to prepare the frame. Using a saw, cut the frame as shown below to remove the un-needed rails.

(NOTE:Lay Frame and doors on a flat smooth soft work surface to prevent damage).

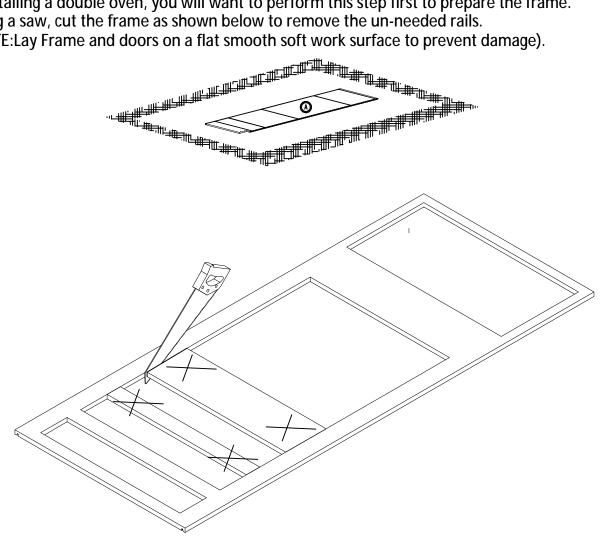

The assembled double oven cabinet will look like this with the large opening, and a single drawer at the bottom.

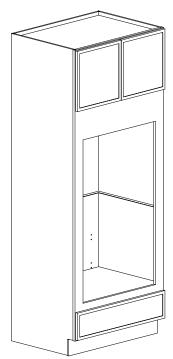







►Instructions:


Place the side panel (A) face down on a flat soft working surface to ensure that the face is not scratched or damaged. (Figure 1).

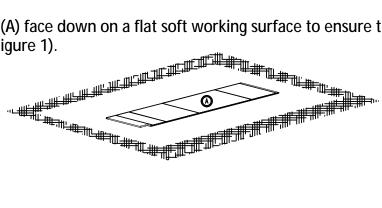

2. Install the Back Panel: Insert the back panel (B) into the groove of the side panel (A) and click it into place. (Figure 2)

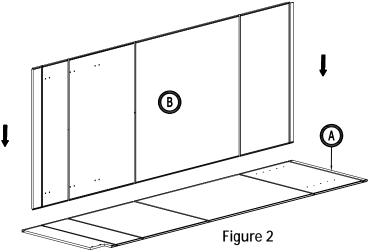


3. Installing the Top, Bottom panel: Insert top, bottom (C) into grooves of back panel (B) & side panel (A). Press down until they click into place. (Figure 3)

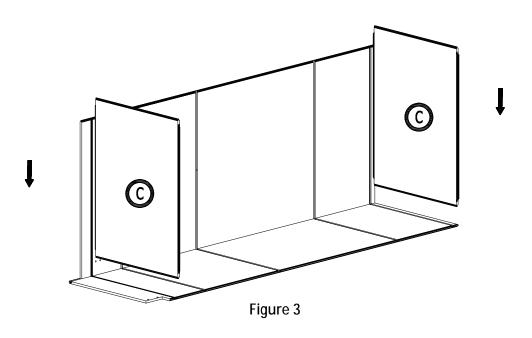





4. Install the Toe Kick: Insert the Toe Kick (E) into the free hole of side panel (A). (Figure 4)

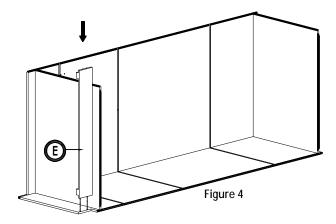

5. Install the side Panel: Insert the side panel (A) into the groove of the back panel (B), top, bottom (C) and Toe kich (E). Press down until they click into place. (Figure 5)

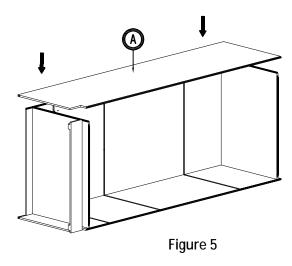

6. Install the center panel (D): Slide down the center panel (D) into the groove of the side panel (A), back panel (Depending if you install a single or a double follow the install location) . Press down until they click into place. (Figure 6)

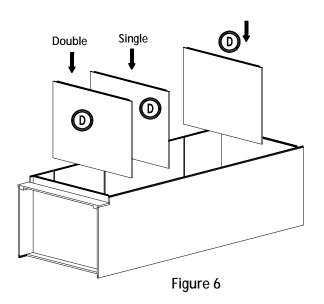



7. Install the framel: Insert the frame (F) into the groove of the side panel (A), top, bottom (C) and center panel (D) . Press down until they click into place. (Figure 6)

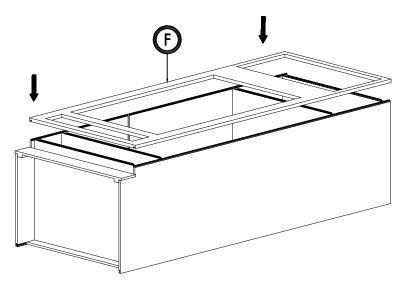


Figure 7

8. Asemble screw 1" into the back of center panel (D) for "Single" or "Double" (Figure 8)


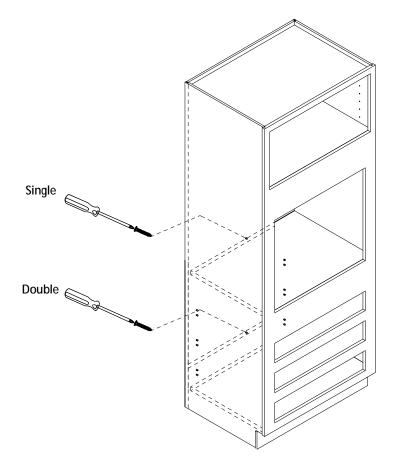


Figure 8







9. Assemble the drawer (X3)




1. Install the drawer bottom into drawer box back, click into place (Figure 1)




2. Install the drawer front into grove of drawer bottom, click into place (Figure 2)



3. Install the drawer side into drawer back, drawer box back and front, click into place (Figure 3)



4. Asemble screw 1" into drawer back with drawer side and drawer front with drawer side(Figure 5)

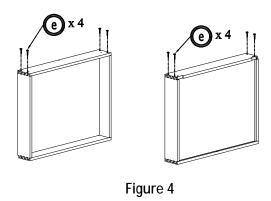

5. Asemble the screw 1" from drawer box front with drawer front into the free hole in the drawer front (Figure 5)






Figure 5


6. Asemble the screw 1" from inside of drawer box front with drawer front into the free hole in the drawer front (Figure 6)




10. Assemble the drawer runner inside of cabinet with 2 screws 9/15" (e) for each side Put plastic block into free hole in the back panel (B) .(Figure 8)

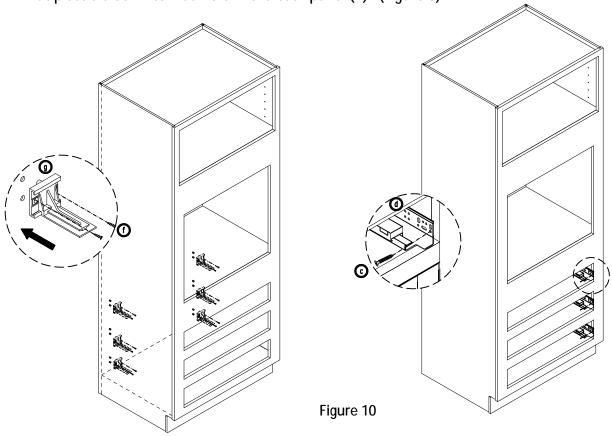

11. Assemble 3D locking device with 3 srews 6/15", to move out the slide and put drawer to click into the hook of slide with the hole in back side of drawer back . 3D locking device can just the drawer up/down, Left/Right or in/out .(Figure 9)

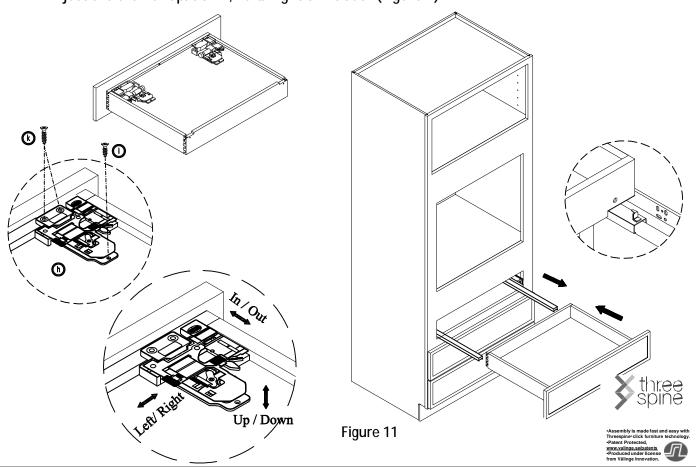

12. Assemble 4 hinges into two doors by screw driver and 8 screw 7/15" (Figure 6)

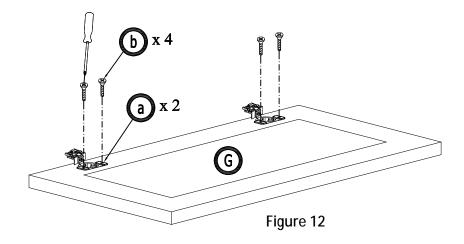

13. Assemble door with hinges to lelf and right of cabinet frame by 4 screw 4/5" (Figure 7)

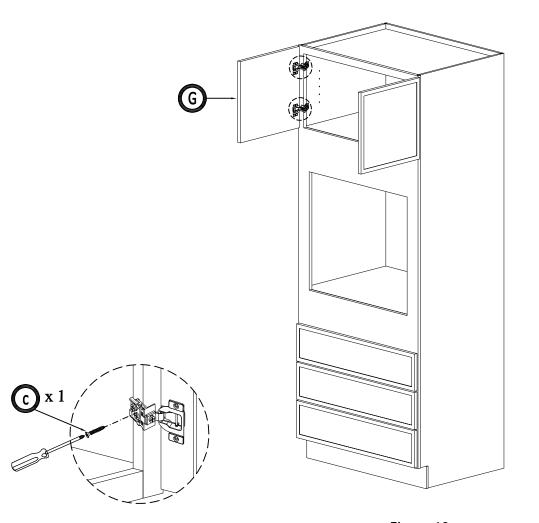


Figure 13





14. installing the shelf inside of cabinet: Insert plastic shelf support into the free hole inside of side panel and put the shelf on the support. This step should be after install cabinet to the wall .(Figure 9)


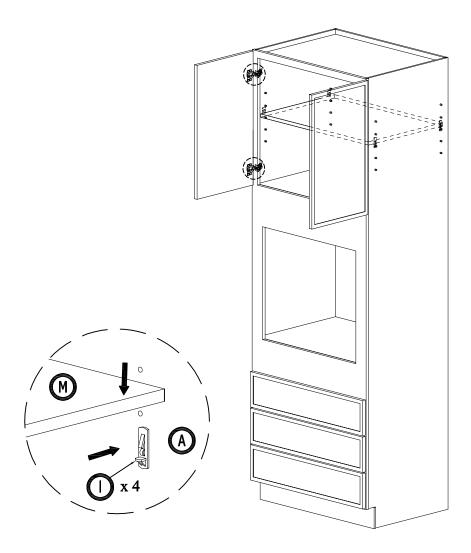


Figure 14



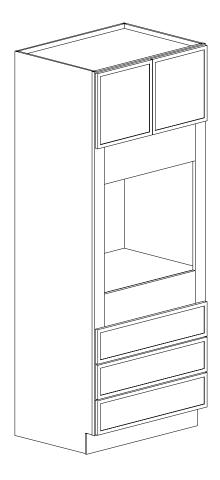

► Maintenance:

For daily cleaning, use a dry cloth and a soft liquid cleaner.

Never use abrasive cleaner containing aceton, chlorine or strong bleach. Also, do not use tool as scrapers, metallic brushes, and other products which canscratch or tarnish surfaces.

Under no circumstances should you use chrome cleaner on chrome-plated or brass trim, hinges, handles, sockets etc.

good ventilation is essential for maintaining the quality and look of this furniture

Warranty and Customer Care Information

For the most up to warranty information for your product, please visit our webside - www.cabinet.comto to get the specific details. If you have any questions with warranties or to make a claim, please contact customer care email - customercare@cabinettogo.com or call 1-800-CABINET.



