



INSTALLATION INSTRUCTIONS

Dual Deck Center Console Insert (DD-CCI) for Tesla Model 3 and Model Y

Please read these Installation Instructions **BEFORE** you install and use the EVANNEX Dual Deck Center Console Insert.

EVANNEX Dual Deck Center Console Insert (DD-CCI) has been designed to better organize your Model 3 or Model Y center console storage space, allowing you to find and access items quickly and efficiently.

INSTALLATION

Step 1. Refer to the cross section schematic in Figure 1 to understand the orientation and placement of the DD-CCI.

Step 2a. Empty your storage box of all items, **open the storage door and the charging door** and rotate the charging platform upward. Unplug any USB cabling or devices you have in place.

Step 2b. Place any items you want hidden on the bottom of the storage box. Note that the hidden items should **NOT** be items you access frequently. The hidden items should not rise above a line running from **point A** to **point B** (Figure 1), approximately 4 inches from the storage box floor.

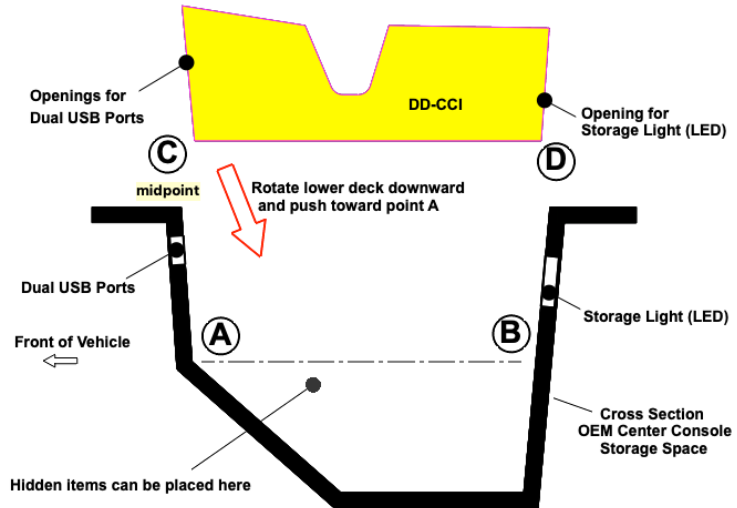


Figure 1. Installing the DD-CCI

Step 3. Tilt the DD-CCI downward toward point A and slide the box into place so that point C (Figure 1) touches Point A. The fit will be snug. Push the DD_CCI forward and into place.

Step 4. As you're pushing forward, rotate point D on the DD-CCI downward and into the OEM storage box. As you're doing this, be sure to align the openings for the USB ports on the front wall of the lower deck and the opening for the storage light on the back wall of the storage deck.

NOTE: Fit is intentionally tight. You'll need to push the lower deck downward and forward to align the USB and light opening. **The rear wall MUST be pushed downward sufficiently to allow the storage door to close. If the door does not close, push the lower deck further down** so the edge of the rear wall does not interfere with the rotation of the storage door.

Step 5. Put whatever items you'd like to hold in the DD-CCI into place.

DD-CCI is now ready for use!

REMOVAL (please refer to Figure 1)

After you unplug any USB connections, remove the DD-CCI by lifting it out. Pull the rear wall of the **DD-CCI** upward by placing the fingers of **both** hands into the opening for the rear **Storage Light** and pulling straight upward. Rotate the rear of the DD-CCI upward and toward the dash and slide it out by pulling toward the rear.