



## INSTALLATION INSTRUCTIONS

### Dual Deck Center Console Insert (DD-CCI) for Tesla Model 3

Please read these Installation Instructions **BEFORE** you install and use the EVANNEX Dual Deck Center Console Insert. Detailed video installation instructions can be found at [evannex.com](http://evannex.com).

EVANNEX Dual Deck Center Console Insert (DD-CCI) has been designed to better organize your Model 3 center console storage space, allowing you to find and access items quickly and efficiently.

#### INSTALLATION

**Step 1.** Refer to the cross section schematic in Figure 1 to understand the orientation and placement of the DD-CCI.

**Step 2a.** Empty your storage box of all items, **open the storage door and the charging door** and rotate the charging platform upward. Unplug any USB cabling or devices you have in place.

**Step 2b.** Place any items you want hidden on the bottom of the storage box. Note that the hidden items should **NOT** be items you access frequently. The hidden items should not rise above a line running from **point A** to **point B** (Figure 1), approximately 4 inches from the storage box floor.

**Step 3.** Tilt the lower deck downward toward point A and slide the box into place so that point C (Figure 1) touches Point A. The fit will be tight. Push the lower deck forward and into place.

**Step 4.** As you're pushing forward, rotate point D on the lower deck downward and into the box. As you're doing this, be sure to align the openings for the USB ports on the front wall of the lower deck and the opening for the storage light on the back wall of the storage deck.

**NOTE:** Fit is intentionally tight. You'll need to push the lower deck downward and forward to align the USB and light opening. **The rear wall MUST be pushed downward sufficiently to allow the storage door to close. If the door does not close, push the lower deck further down** so the edge of the rear wall does not interfere with the rotation of the storage door.

**Step 5.** Put whatever items you'd like to hold in the lower deck space into place.

**Step 6.** Drop the upper deck on top of the lower deck so that the "key" on the bottom of the upper deck aligns with the keyway on the top edge of the lower deck (see Figure 1).

**Step 7.** Put whatever small items you'd like to hold in the upper deck space into place.

*DD-CCI is now ready for use!*

#### **REMOVAL** (please refer to Figure 1)

To remove the DD-CCI, first remove the **Upper Deck** by lifting it out. Next, pull the rear wall of the **Lower Deck** upward by placing the fingers of **both** hands into the opening for the rear **Storage Light** and pulling straight upward. The fit is tight, and you'll have to pull hard. Rotate the rear of the box upward and toward the dash and slide it out by pulling toward the rear.

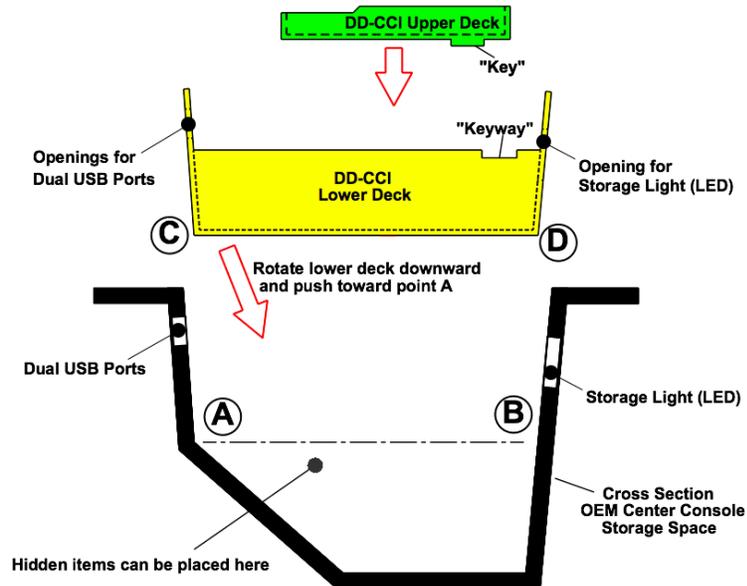


Figure 1. Installing the DD-CCI  
Upper & lower DD-CCI decks inserted individually