


EVANNEX

Tesla Model 3/Y Rear Skid Plate
Installation Instructions - [Click HERE to Shop](#)



Skill Level 1:
Easy

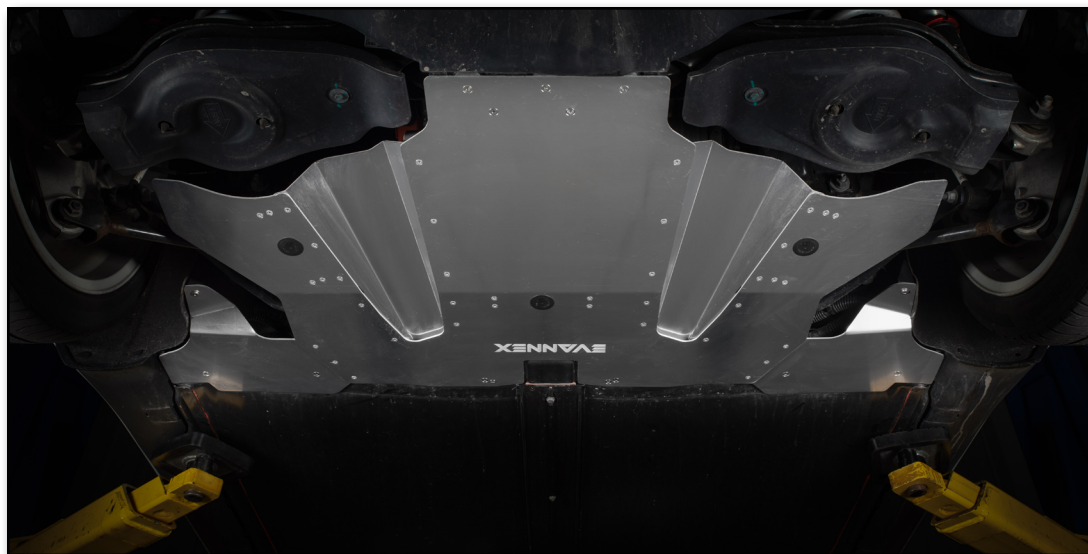

Proper service and repair procedures are vital to the safe, reliable operation of all motor vehicles as well as the personal safety of those performing the repairs. Standard safety procedures and precautions (including use of safety goggles and proper tools and equipment) should be followed at all times to eliminate the possibility of personal injury or improper service which could damage the vehicle or compromise its safety.

TABLE OF CONTENTS

Installation and Safety Information [pg.3](#)
Removing The Stock Rear Skid Plate [pg.4](#)
Installing The New Rear Skid Plate [pg.5](#)

KIT CONTENTS



INSTALLATION NOTES

- **RH** refers to the *passenger side* of the vehicle.
- **LH** refers to the *driver side* of the vehicle.
- Always use the proper torque specifications.
- If applicable to this installation, torque specifications will be listed throughout the document and at the end as well.
- Please read all of these instructions and familiarize yourself with the complete process **BEFORE** you begin.

GENERAL PREPARATION AND SAFETY INFORMATION

EVANNEX cares about your health and safety, please read the following safety information. This information pertains to automotive service in general, and while it may not pertain to every job you do, please remember and share these important safety tips.

- Park your car in a safe, well lit, level area.
- Turn off the vehicle and remove the key.
- Make sure any remote start devices are properly disabled.
- **ALWAYS** wear safety glasses.
- Make sure the parking brake is applied until the vehicle is safely lifted and supported.
- Whether lifting a vehicle using an automotive lift or a hydraulic jack, be sure and utilize the factory specified lift points.
- Lifting a vehicle in an incorrect location can cause damage to the suspension/running gear.
- **ALWAYS** support the vehicle with jack stands.
- **ALWAYS** read and follow all safety information and warnings for the equipment you are using.




NEVER get underneath a vehicle that is supported only by a jack, and **ALWAYS** make sure that the vehicle is securely supported on jack stands.

REMOVING THE STOCK REAR SKID PLATE

Step 1: 10mm Socket & Ratchet

Support the stock rear skid plate, remove the thirteen bolts (**RED** circles), and remove it from the vehicle.

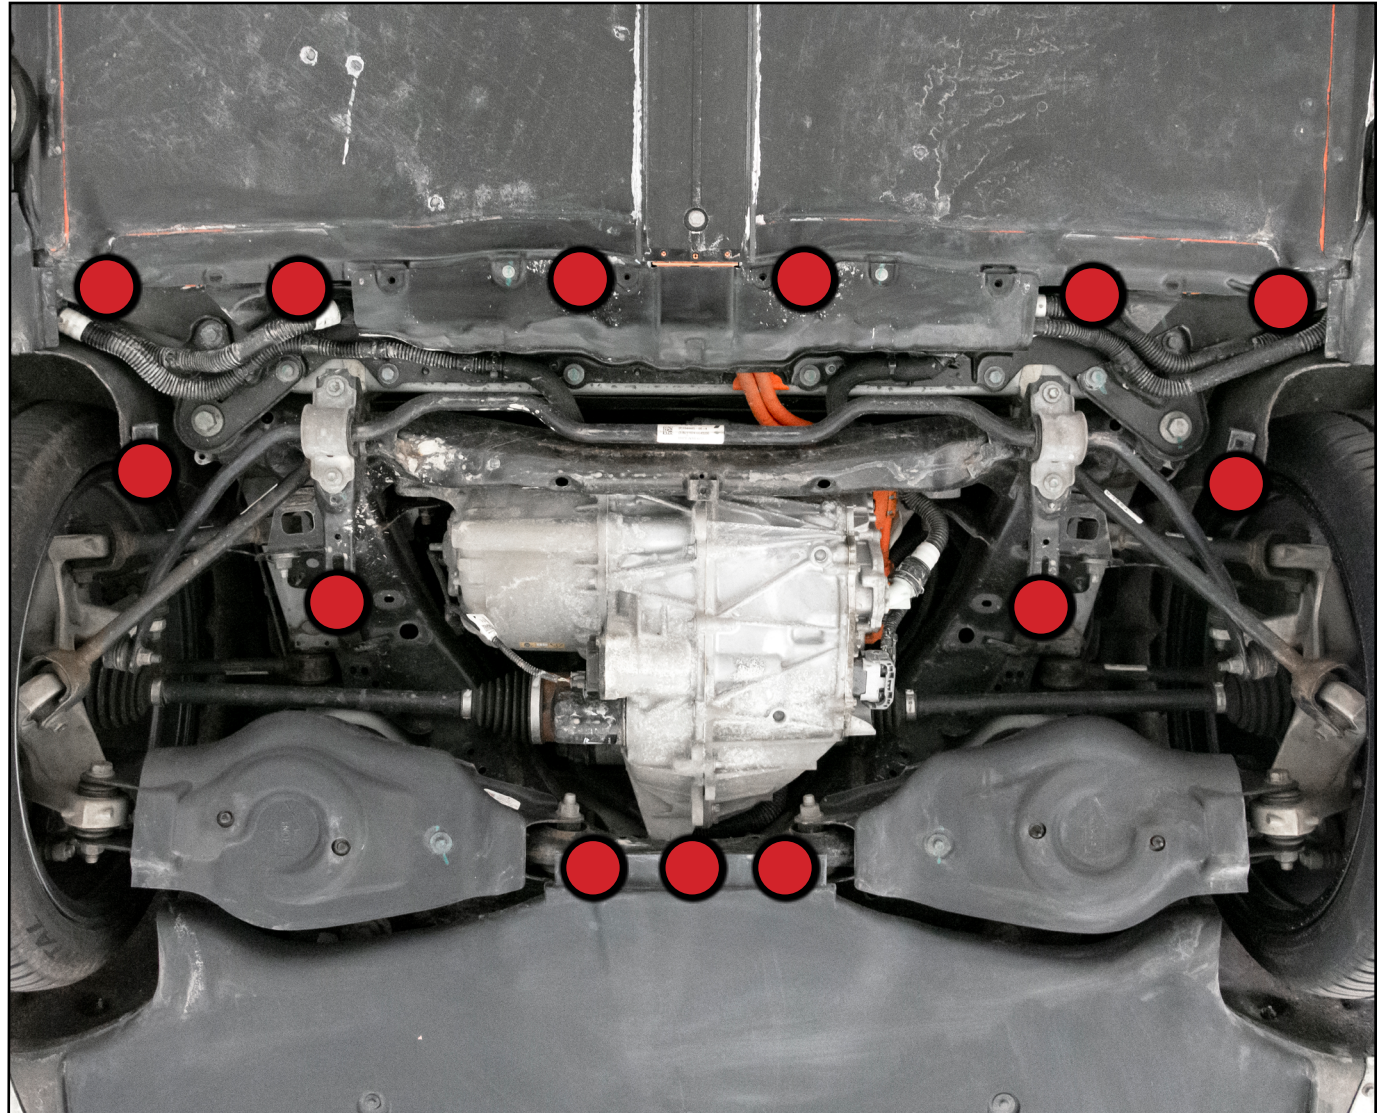


INSTALLING THE NEW REAR SKID PLATE

Step 1: 13mm Wrench

Using the legend below, install the provided standoffs into the threaded holes at the back of the battery pack and tighten them until snug.

- M6 x 10mm standoff
- M6 x 14mm standoff

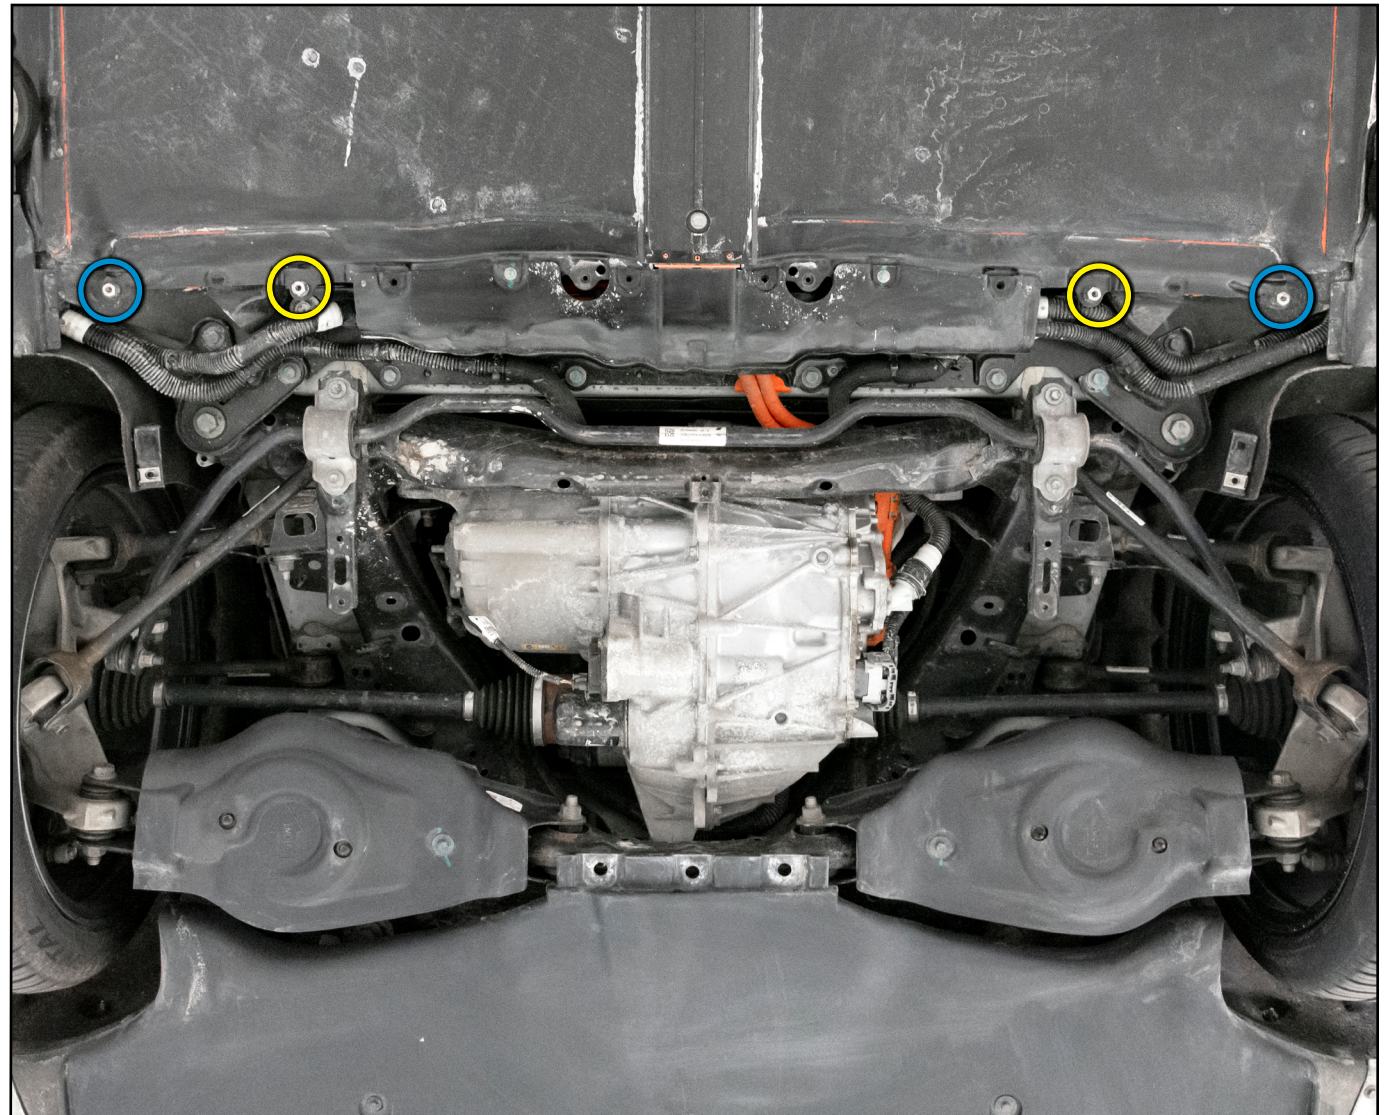

INSTALLING THE NEW REAR SKID PLATE

Step 2: 4mm Hex (Allen)

Lift the new skid plate into place and loosely install the hardware according to the legend below to secure it in place, then tighten all of the hardware until snug.


Install the three provided plugs into the holes in the skid plate (not shown).

- M6 x 12mm button head screw
- M6 x 30mm flat head screw
- M6 x 20mm flat head screw
- M6 x 10mm flat head screw



Apply the provided anti-seize to the threads of each bolt to aid in future removal.

Congratulations, your installation is complete!

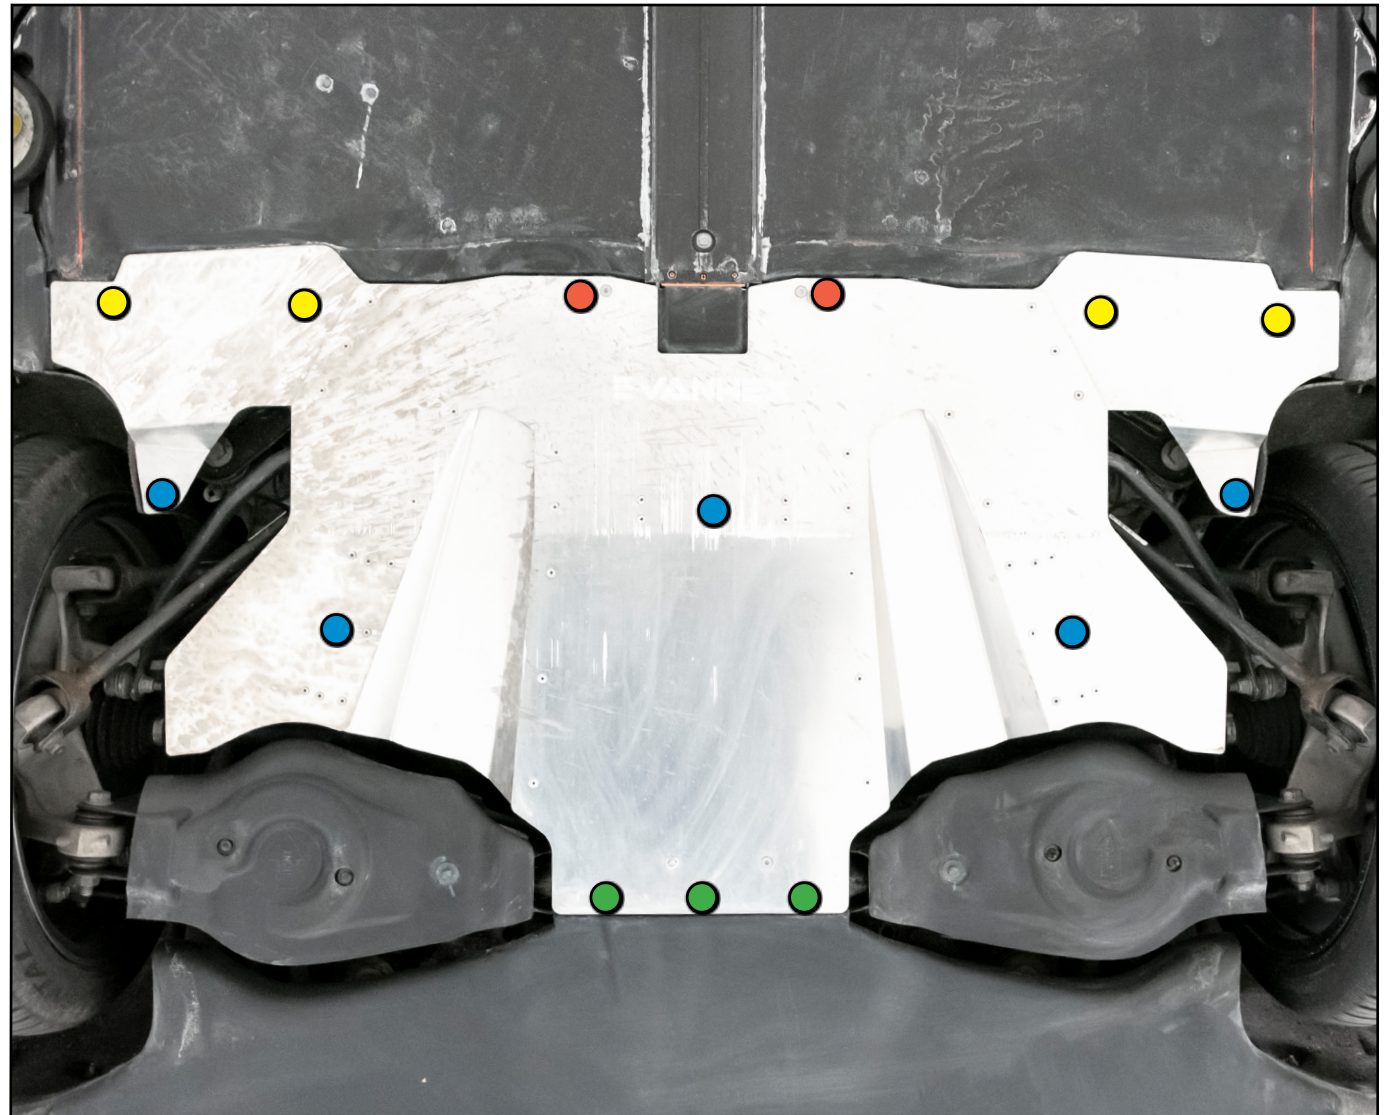

Your Rear Skid Plate installation is complete!



These instructions are provided as a courtesy by: **EVANNEX**

Proper service and repair procedures are vital to the safe, reliable operation of all motor vehicles as well as the personal safety of those performing the repairs. Standard safety procedures and precautions (including use of safety goggles and proper tools and equipment) should be followed at all times to eliminate the possibility of personal injury or improper service which could damage the vehicle or compromise its safety. Although this material has been prepared with the intent to provide reliable information, no warranty (express or implied) is made as to its accuracy or completeness. Neither is any liability assumed for loss or damage resulting from reliance on this material. SPECIFICALLY, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY IS MADE OR TO BE IMPLIED WITH RESPECT TO THIS MATERIAL. In no event will ECS Tuning, Incorporated or its affiliates be liable for any damages, direct or indirect, consequential or compensatory, arising out of the use of this material.