



Tesla Model 3/Y Carbon Fiber Seat Back Set
Installation Instructions - [Click HERE to Shop](#)



Skill Level 1:
Easy



TABLE OF CONTENTS

Installation and Safety Information	pg.3
Removing The Stock Seat Backs.....	pg.4
Installing The New Seat Back Set.....	pg.5

REQUIRED TOOLS

Note: The tools required for each step will be listed by the step number throughout these instructions.

- Angled Pick
- Non-Marring Trim Removal Tool



INSTALLATION NOTES

- **RH** refers to the *passenger side* of the vehicle.
- **LH** refers to the *driver side* of the vehicle.
- Always use the proper torque specifications.
- If applicable to this installation, torque specifications will be listed throughout the document and at the end as well.
- Please read all of these instructions and familiarize yourself with the complete process **BEFORE** you begin.

GENERAL PREPARATION AND SAFETY INFORMATION

EVANNEX cares about your health and safety, please read the following safety information. This information pertains to automotive service in general, and while it may not pertain to every job you do, please remember and share these important safety tips.

- Park your car in a safe, well lit, level area.
- Shut the engine off and remove the key from the ignition switch.
- Make sure any remote start devices are properly disabled.
- **ALWAYS** wear safety glasses.
- Make sure the parking brake is applied until the vehicle is safely lifted and supported.
- Whether lifting a vehicle using an automotive lift or a hydraulic jack, be sure and utilize the factory specified lift points.
- Lifting a vehicle in an incorrect location can cause damage to the suspension/running gear.
- **ALWAYS** support the vehicle with jack stands.
- **ALWAYS** read and follow all safety information and warnings for the equipment you are using.




NEVER get underneath a vehicle that is supported only by a jack, and **ALWAYS** make sure that the vehicle is securely supported on jack stands.

REMOVING THE STOCK SEAT BACKS


Step 1: Trim Removal Tool, Pick Tool

Carefully pull the fabric down around the base of each headrest post to expose the small metal retaining clip (highlighted in **GREEN** in inset photo), then carefully pull each clip outward while lifting up on the headrest to slide it up as shown.

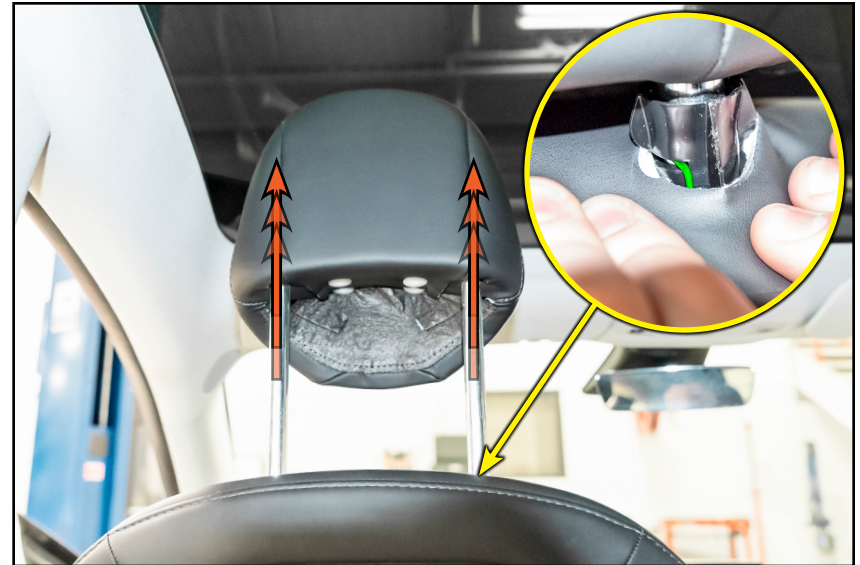

Step 2:


Pivot the seat back downwards as shown, then disconnect the two straps (highlighted in **GREEN** in inset photo) which secures the lower fabric flap to the underside of the seat. Remove the OE seat back.

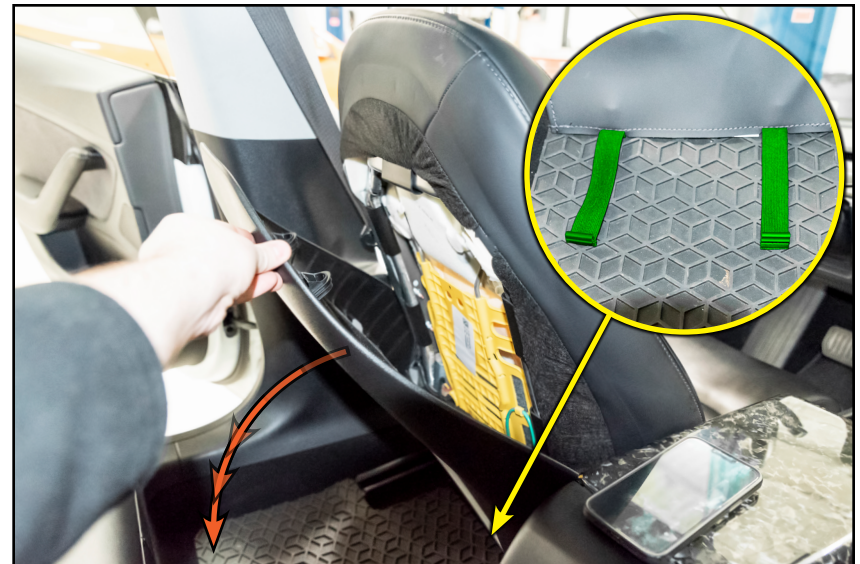

REMOVING THE STOCK SEAT BACKS


Step 1: Trim Removal Tool, Pick Tool

Carefully pull the fabric down around the base of each headrest post to expose the small metal retaining clip (highlighted in **GREEN** in inset photo), then carefully pull each clip outward while lifting up on the headrest to slide it up as shown.

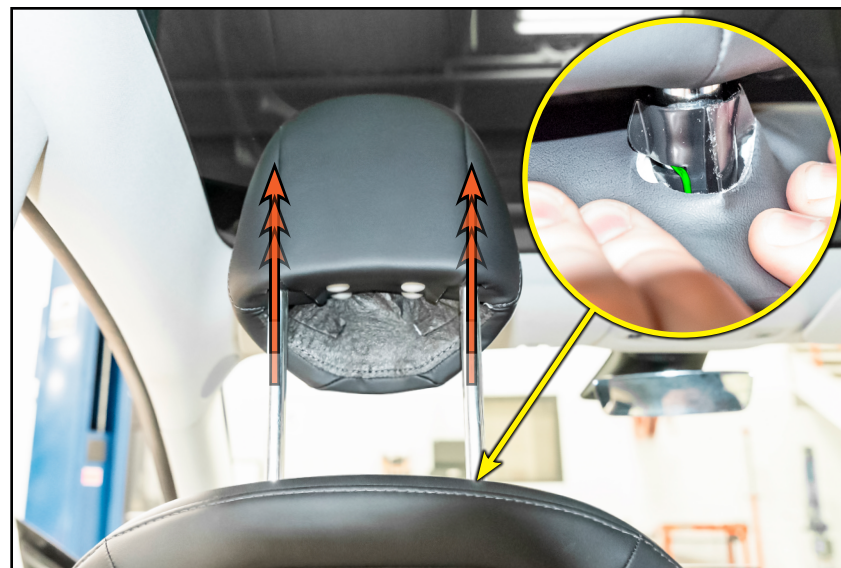

Step 2:

Pivot the seat back downwards as shown, then disconnect the two straps (highlighted in **GREEN** in inset photo) which secures the lower fabric flap to the underside of the seat. Remove the OE seat back.

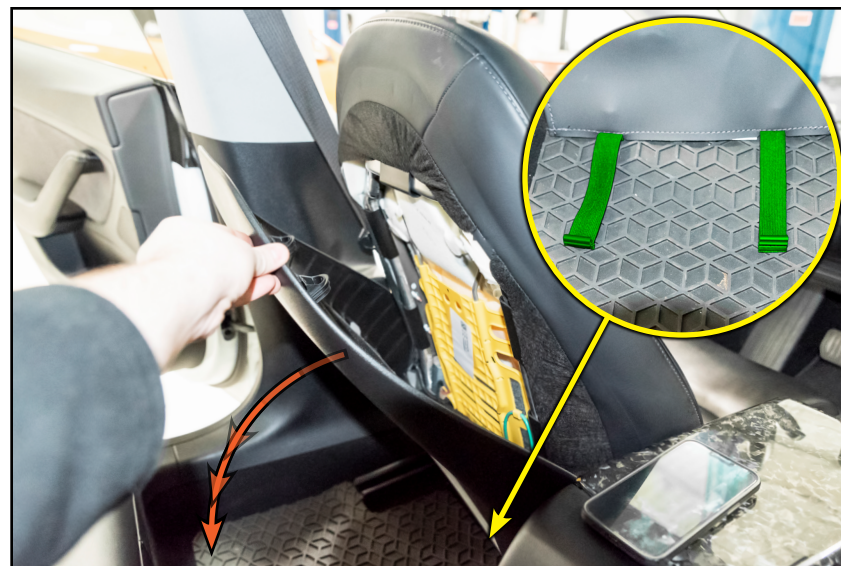

INSTALLING THE NEW SEAT BACK SET

Step 1:

Slide the two lower mounting tabs (highlighted in **GREEN**) on the new seat back into the metal slots on the back of the seat as shown.



Step 2:

Pivot the new seat back up into position as shown, then slide the headrest back down until it clicks into place, locking the seat back into position.



Congratulations, your installation is complete!

Your Carbon Fiber Seat Backs installation is complete!



These instructions are provided as a courtesy by: **EVANNEX**

Proper service and repair procedures are vital to the safe, reliable operation of all motor vehicles as well as the personal safety of those performing the repairs. Standard safety procedures and precautions (including use of safety goggles and proper tools and equipment) should be followed at all times to eliminate the possibility of personal injury or improper service which could damage the vehicle or compromise its safety. Although this material has been prepared with the intent to provide reliable information, no warranty (express or implied) is made as to its accuracy or completeness. Neither is any liability assumed for loss or damage resulting from reliance on this material. SPECIFICALLY, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY IS MADE OR TO BE IMPLIED WITH RESPECT TO THIS MATERIAL. In no event will ECS Tuning, Incorporated or its affiliates be liable for any damages, direct or indirect, consequential or compensatory, arising out of the use of this material.