




Rear Seat Cover Installation (Professional Installation Required)

Thank you for purchasing our Model S Seat Covers.

The installation of the rear seat cushion seat cover requires removal of the rear seat cushion. This is a complex job, best left for a professional installer. EVANNEX is not responsible for any damage or injury that may occur as a consequence of any attempt to remove the rear seat cushion.

Note to professional installer: The rear seat cushion is attached using two large, heavy duty automotive fasteners, one at each end of the rear seat about 6 – 8 inches from the end of the seat. The following photo shows the clip type (red arrow):

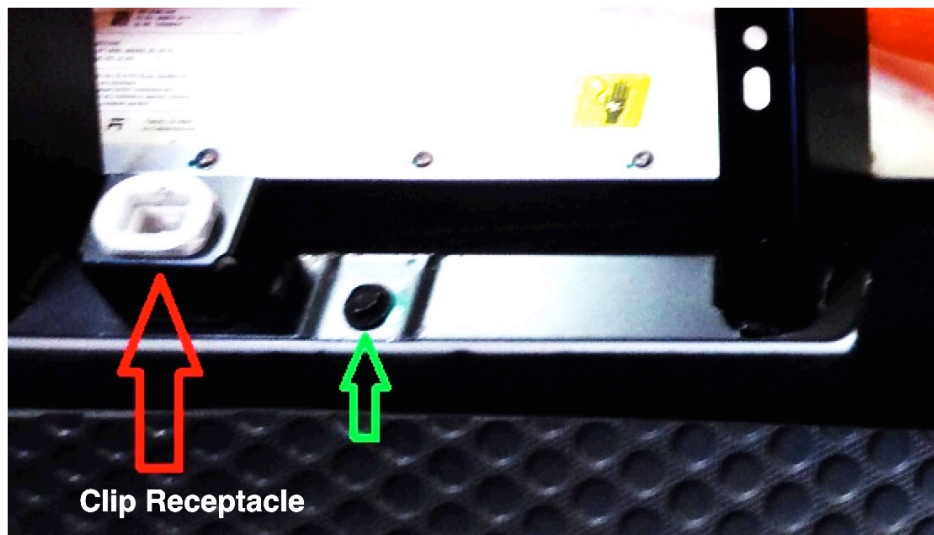

The clips are difficult to remove; however, they can be detached by exerting heavy upward force at the site of the fastener and on the side of the seat cushion, one clip at a time. **DO NOT** twist the seat as you pull upward. The same operation is applied for the second fastener.

WARNING: Tesla Motors sometimes changes the design of its internal components, including mechanisms for fastening. Please check with Tesla Motors to be sure that the design of the seat cushion fastening mechanism has not been modified for the vehicle you're working on.

CAUTION/DANGER: Removal of the seat cushion exposes some control electronics and wiring. **DO NOT touch any of this equipment** and **DO NOT** leave this area exposed beyond the time it takes to install the seat cover on the rear seat cushion and replace the rear seat cushion.

1. Installation of the rear seat cushion cover should occur outside the car.
2. **IMPORTANT:** Be certain to secure all fastening straps and clips for the seat cushion using electrical tape. No straps should be hanging downward loosely.
3. The seat cushion should be carefully positioned and re-installed by pushing down into the clip receptacle, one side at a time.

Rear Seat Covers Installation Instructions (copyright © 2016, Evannex®)

Evannex® is not responsible for any damage that might occur as a consequence of these Installation Instructions. Please consult a qualified professional if you are uncomfortable with any of the operations described herein.



Rear Seat Cover Installation Overview for Installer:

Installing the Seat Covers for the Rear Seat Cushion

1. Remove the rear seat cushion from the Model S. Note all cautions on the first page of this document.
2. With the cushion removed, install the cushion seat cover, tightening all straps for a snug fit.
3. Be certain to secure all fastening straps and clips for the seat cushion using electrical tape. No straps should be hanging downward loosely.
4. The seat cushion should be carefully re-positioned and re-installed by pushing down into the clip receptacles, one side at a time.

Installing the Seat Covers for the Rear Seat Backs

1. Begin with the seat cover for the smaller fold-down seat back.
2. Fold down the seat back and then lift to a 45 degree angle
3. Slip the seat cover over the seat back, being sure to align all cut-outs so that the seat cover does not impede movement, access to rear fastening hooks, or proper connection when the seat back is returned to its upright position.
4. Conduct steps 2 and 3 for the large seat back cover
 - a. Be sure to open the Velcro seam in the center of the seat cover back
 - b. Slip the seat cover over the seat back, being sure to align all cut-outs so that the seat cover does not impede movement, access to rear fastening hooks, or proper connection when the seat back is returned to its upright position.
5. Tighten and adjust the seat back covers for a snug fit.

Installing the Seat Covers for the Rear Seat Cushion

The installation of the rear seat cushion cover requires removal of the rear seat cushion. This is a complex job, best left for a professional installer. See comments and Warnings on the preceding page.