

# Montpellier

Glazed Ceramic Tile  
High Density Ceramic



## Technical Data



Tile Applications:	Residential	Light Commercial	Commercial
Floors	•	•	•
Walls/backsplashes	•	•	•
Countertops	•	•	•

\*Not recommended for ramps or floor areas exposed to water or heavy grease accumulation

Property:	Results	ASTM	ASTM #:
Wear Rating (PEI)	IV	0-V	ASTM C1027
Chemical Resistance	Resistant	Resistant	ASTM C650
Bonding Strength (psi)	>50	>=50	ASTM C482
Dynamic Coefficient of Friction	>0.42	As reported	ANSI A 137.1-2012
Scratch Hardness	7,0	>=5,0	EN 101
Water Absorption	<3%	3%	ASTM C373
Breaking Strength	>350 lbs.	>300	E.N. ISO 13006
Frost Resistance	Resistant	Resistant	ASTM C1026
Stain Resistance	Resistant	As reported	ASTM C1378
Crazing Resistance	Resistant	Resistant	ASTM C424
Thermal Shock	Resistant	Resistant	ASTM C484

### Beige



16" x 24"

7.5" x 24"



Beige  
2" x 4" Bricklay Mosaic  
11.5" X 11.5"

### Noce



16" x 24"

7.5" x 24"



Noce  
2" x 4" Bricklay Mosaic  
11.5" X 11.5"

### Grigio




16" x 24"

7.5" x 24"



Grigio  
2" x 4" Bricklay Mosaic  
11.5" X 11.5"

### Nero

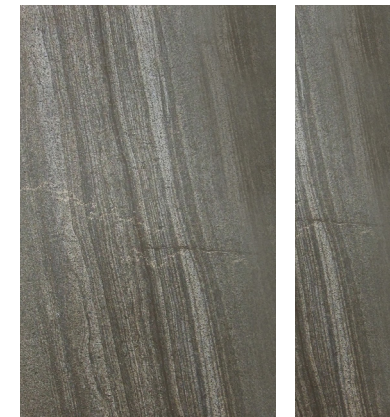


16" x 24"

7.5" x 24"



Nero  
2" x 4" Bricklay Mosaic  
11.5" X 11.5"

Trim (available in all colors)



Surface Bullnose  
3" x 16"